UID5075

# Inner door, 500x750

Displays and indicators can be mounted on a surface within the enclosure while covering other components, and preventing unauthorized access.

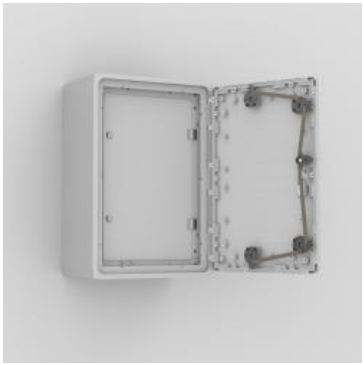

| CHARACTERISTICS | |
|---|---|
| Height | 500 mm |
| Width | 750 mm |

**Item no.:** UID5075
**EAN no.:** 8713574101944

## Technical data

**Description:** For controls, meters, lamps, etc. Hinges can be mounted to allow left or right hand opening. Lock double-bit 3 mm insert. Distance between UID and enclosure door: 48 mm.

**Material:** Glass fibre reinforced polyester.

**Finish:** RAL 7035.

**Protection:** IP 20.

**Delivery:** 1 piece with mounting accessories.

## Features

**Feature:** A plain door to be mounted inside a wall mounted enclosure.

**Advantage:** Additional mounting surface providing two levels of access.

**Benefit:** Non authorized personnel have access to the controls on the inner door only.

**Comment:** This accessory is often used in enclosures with glazed door.