ro tronic

Datenblatt - Fiche technique - Data sheet

11.03.1564





ROLINE Int. SATA 6.0 Gbit/s HDD-Kabel mit Schnappverschluss, gewinkelt, 0,5m


ROLINE Câble SATA 6.0 Gbit/s interne avec attache, coudé, 0,5 m


ROLINE Internal SATA 6.0 Gbit/s Cable, angled, with Latch, 0.5 m


unit: mm

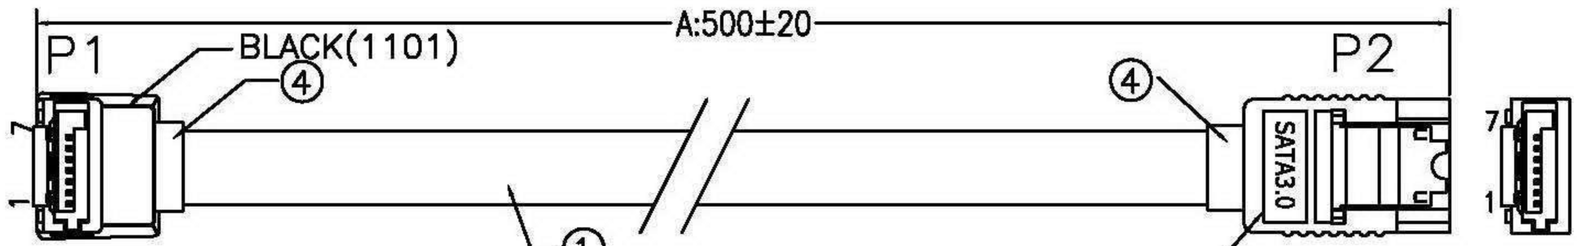

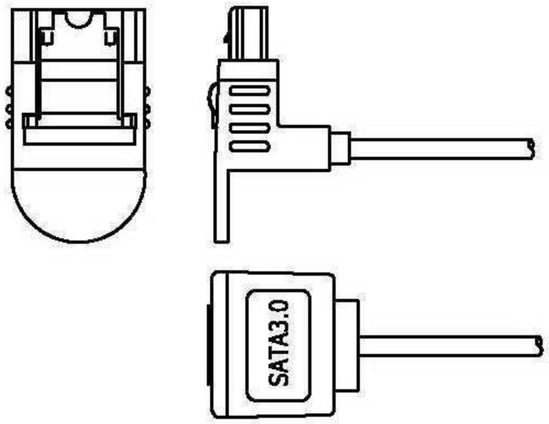

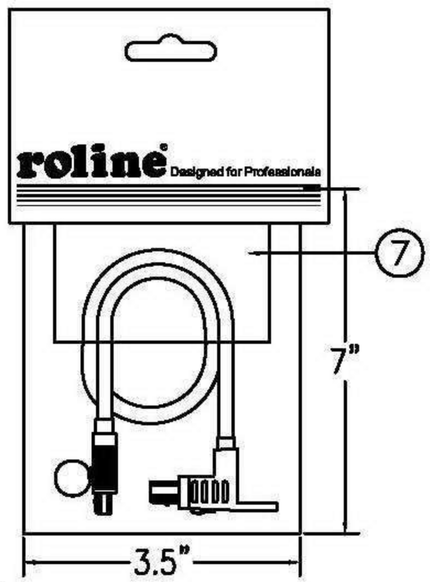

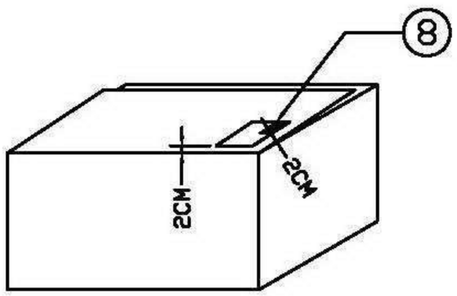

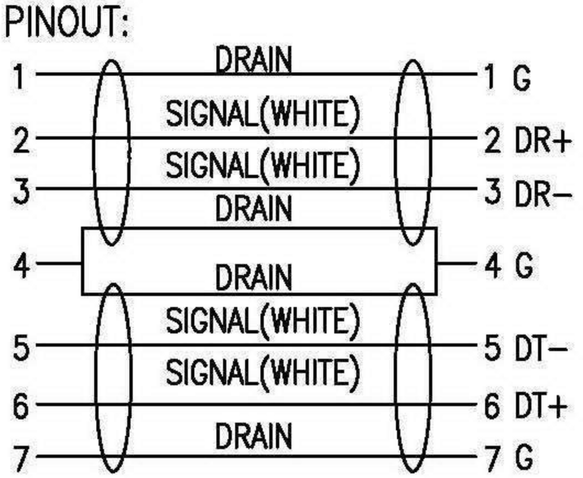

NOTE:

1) CONDUCTOR RESISTENCE:1 Ω Max;
   INSALUTION RESISTENCE: 50M Ω Min;
   HI-POT:DC 300V;
   SHORT AND OPEN 100% TESTING
   DIE NO.: P1 0Z07105 P2 0Z07101
2) RoHS COMPLIANT.
3) 1PCS/PE BAG+HEADER PAPER+LABEL(7).
4) 25PCS/INNER BOX+LABEL(8).
5) 2PCS INTO A OUTER BOX.

4	INNER JACKET PE RoHS
3	OUTER JACKET 45Pa PVC BLACK(1101) RoHS
2	SATA 7PIN CONNECTOR BLACK PBT TERMINAL PLATED GOLD 3U"
1	SATA 3.0(2C*26AWG+AL+2D)*2C OD:2.2*7.6MM RED 500MM RoHS

REV.	ECR	DESCRIPTION	C.N.	DATE
A		FIRST EDITION	J.LAN	27/01/11

Rotronic Co., Ltd.

UNLESS OTHERWISE SPECIFIDE:
DIMENSIONS ARE IN MILLIMETERS
ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.10mm
30.01 TO 80.00mm	±0.13mm
80.01 TO 150.00mm	±0.15mm
150.01mm	±0.20mm

MATERIAL: MATERIAL
FINISH: FINISH

ROLINE Internal SATA 6.0Gbit/s Cable, angled, 0.5m

CHKD. | CONF.
DR. J.LAN | APPD.
PART NO. 11.03.1564
SCALE | SHEET 1/1 | UNIT MM | SIZE A4 | REV. A

WFM-ED-07B