Cone Mounts - Type VP (Male)



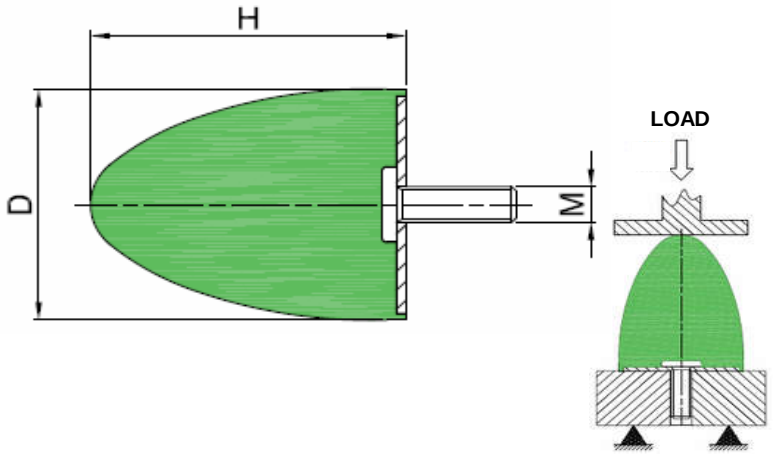

The Type VP Bobbin Mount End Stops are designed to be used on a wide range of applications to prevent shocks and over-loading thanks to their progressive absorption.

They are manufactured from Natural Rubber in a variety of hardnesses to suit the application, and have a zinc plated steel end section with either welded or cold formed threads.

This range comes with a Male thread on one end.

*** Please note - Each mount c/w 1 Nut & Washer.**

RS Ref:	Fibet Ref:	D	H	*M x l	IRHD	Stiffness (DaN/mm)	Max. Static Deflection (mm)	Maximum Stiffness (DaN)
720-3332	2425VP18-60	24	25	M6 x 18	60	8.2	5.0	41.0
T.B.A.	5050VP23-60	50	50	M8 x 23	60	7.1	10.0	71.0
720-3341	5050VP25-60	50	50	M10 x 25	60	7.1	10.0	71.0
720-3344	10083VP44-70	100	83	M16 X 44	70	59.3	16.6	984.4