
E11528

Adapter plug

ESTGH040MSS0,08E04 (M16)

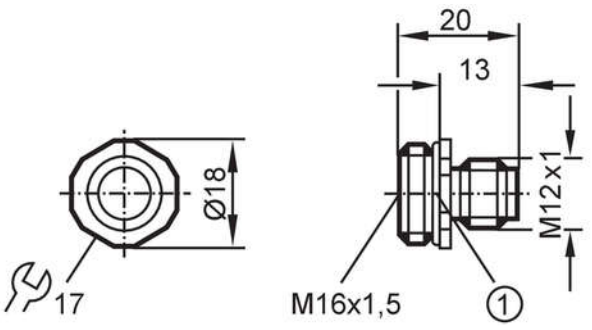

1 O-ring


Application		
Application		Industrial applications / factory automation
Electrical data		
Operating voltage	[V]	< 250 AC/DC
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 68
Mechanical data		
Weight	[g]	30.743
Mounting thread		M16 x 1,5
Materials		housing: diecast zinc nickel-plated
Remarks		
Pack quantity		1 pcs.

Electrical connection

Cable: 0.08 m, PVC; 4 x 0.34 mm²

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Contacts: 4




E11528

Adapter plug

ESTGH040MSS0,08E04 (M16)

Connection

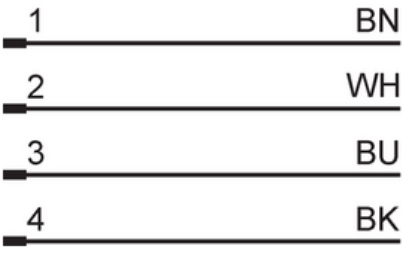

	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white