MOSA M12 FEMALE 0° FIELD-WIREABLE (IDC)


4-pol., 0,14-0,34mm², shielded

Female straight
4-pole
Connection cross section: 0.14...0.34 mm²

Link to Product

Illustration




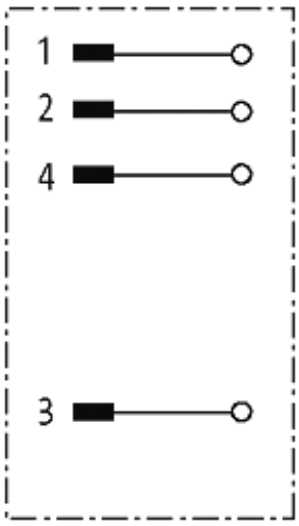

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/16

MURR ELEKTRONIK
stay connected

Female

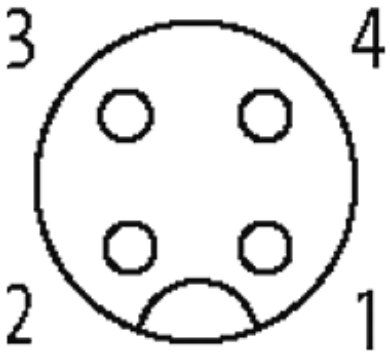

Product may differ from Image

Approvals

Form

Form	12651

Technical Data

Operating voltage	max. 50 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.14...0.34 mm² (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	5.5...7.2 mm
Wire isolation	PVC, PP
Outer wire Ø	1.2...1.6 mm
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range	-25...+85 °C
Dimensions H × W × D	49×19.5×19.5 mm

Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/16