S70-CAN

CAN bus Add-On Board for SGD 70-A PanelPilotACE Display

Provides communication via the CAN bus Protocol for the 7.0" PanelPilotACE display, SGD 70-A



SGD 70-A display sold separately

The S70-CAN mounts on the rear of the SGD 70-A and provides a 3-wire CAN bus interface. It can be connected to via the CAN Hi, CAN Lo and GND pins.

Specifications

Electrical Specification

Channels	1
Max Bit Rate	1 Mbps
Operating Voltage	5V from PanelPilotACE display
Operating Temperature	0-40°C
Supported Protocols	J1939

TB1.1	CAN HI
TB1.2	CAN LOW
TB1.3	GND

Dimensions and Mounting

All dimensions are in mm (in)

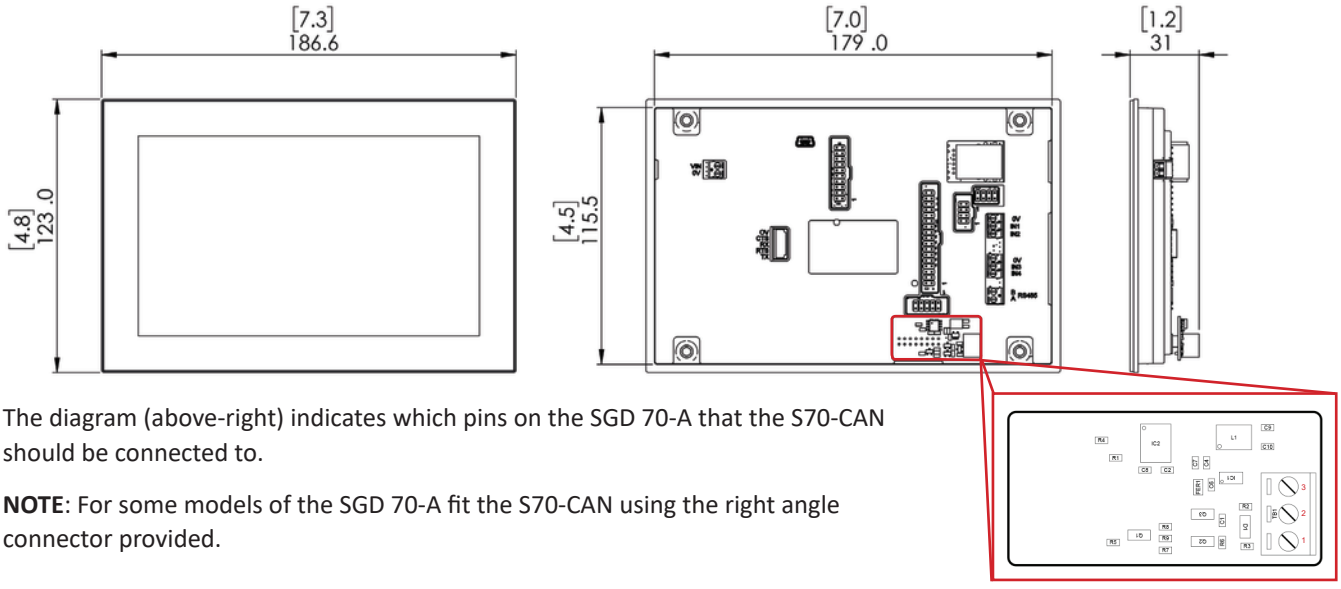

The diagram (above-right) indicates which pins on the SGD 70-A that the S70-CAN should be connected to.

NOTE: For some models of the SGD 70-A fit the S70-CAN using the right angle connector provided.