
# KS-4N-19





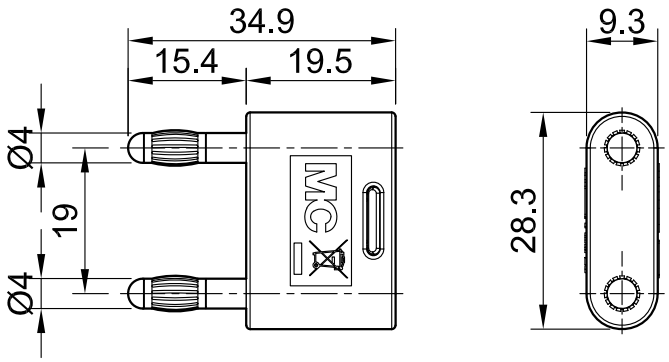


## Item number 64.4012-*

Insulated, Ø 4 mm, made of brass. Plugs with spring-loaded MULTILAM contact technology. With insulated grip. At rear without in-line Ø 4 mm rigid sockets.

| Technical data | |
|---|---|
| Diameter of plug system | 4 mm |
| Rated Values | 30 V, 32 A / 60 V, 32 A |
| Surface treatment electrical contact | Ni |
| Base material electrical contact | CuZn |
| Standard color(s) * | 20 21 22 23 24 25 26 27 28 29 30 |
| Plug spacing | 19 mm |
| Test accessory acc. to | IEC EN 61010-031 |
| User-Information | I 099 |

Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. © Stäubli 2022 | ec.marcom@staubli.com | Photo credits: Stäubli | **www.staubli.com**