SCHAEFFLER



FAG

X-life

22315-E1-XL-K-C3

Spherical roller bearing

Schaeffler ID:
0167055130030

Spherical roller bearings 223..-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

Technical information

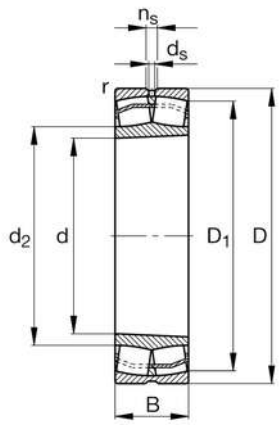

Main Dimensions & Performance Data

d	75 mm	Bore diameter
D	160 mm	Outside diameter
B	55 mm	Width
C_r	445,000 N	Basic dynamic load rating, radial
C_{0r}	450,000 N	Basic static load rating, radial
C_{ur}	42,000 N	Fatigue load limit, radial
n_G	4,500 1/min	Limiting speed
$n_{\vartheta r}$	3,550 1/min	Reference speed
	5.144 kg	Weight

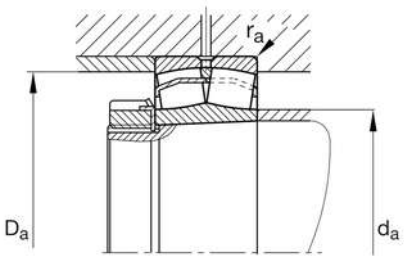

Mounting dimensions

$d_{a\ min}$	87 mm	Minimum diameter shaft shoulder
$d_{a\ max}$	92 mm	Maximum diameter of shaft shoulder
$D_{a\ max}$	148 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	2.1 mm	Maximum recess radius
$d_{b\ min}$	82 mm	Minimum cavity diameter of the sleeve
$B_{a\ min}$	5 mm	Minimum cavity width of the sleeve

Dimensions

r_{min}	2.1 mm	Minimum chamfer dimension
D_1	136.3 mm	Bore diameter outer ring
d_2	92.4 mm	Raceway diameter of the inner ring
d_s	4.8 mm	Diameter lubrication hole
n_s	9.5 mm	Width of lubricating groove

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	200 °C	Operating temperature max.

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all further information and guidelines for this product. For further information you can use the contact form on our website.

Calculation factors

e	0.34	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y_1	1.99	Dynamic axial load factor
Y_2	2.96	Dynamic axial load factor
Y_0	1.94	Static axial load factor

Additional information

	H2315	Adapter sleeve
	AHX2315G	Withdrawal sleeve

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all further information and guidelines for this product. For further information you can use the contact form on our website.