FEMALE CONNECTOR – END VIEW



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PBT OR NYLON
CONTACT MATERIAL/PLATING	GOLD–PLATED BRASS
COUPLING NUT MATERIAL/PLATING	NICKEL–PLATED BRASS
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	300 V
MAX. CONDUCTORS SIZE	12/18 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	–40°C to 125°C (–40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE DIAMETERS	7mm (.726") TO 10mm (.394")

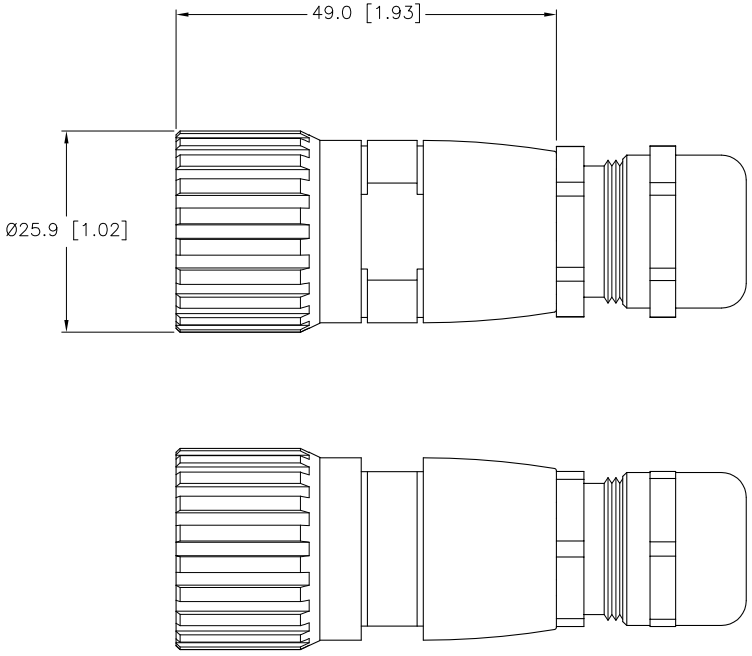

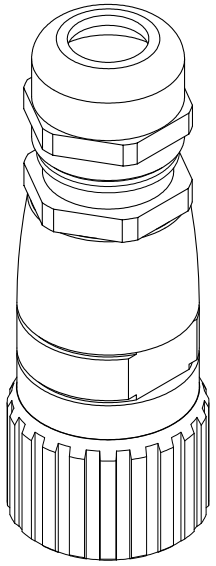

SOURCE DRAWING - FOR REFERENCE ONLY

REV	DESCRIPTION	BY	DATE	ECO NO.
B	UPDATE DRAWING TO REPRESENT ACTUAL PRODUCT	RDS	02/07/02	T5157

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
turck.com

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT RDS | DATE 02/06/02
DSGN | SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION: CK 12–0

IDENTIFICATION NO.: U0105 | REV: A

FILE: U0105 | SHEET 1 OF 1