Rittal – The System.

Faster – better – everywhere.

Outdoor Basic enclosures – CS 9784.540


Date : Apr 27, 2021

ENCLOSURES POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Outdoor Basic enclosures – CS 9784.540

created: 27.04.2021 build on www.rittal.com/uk-en

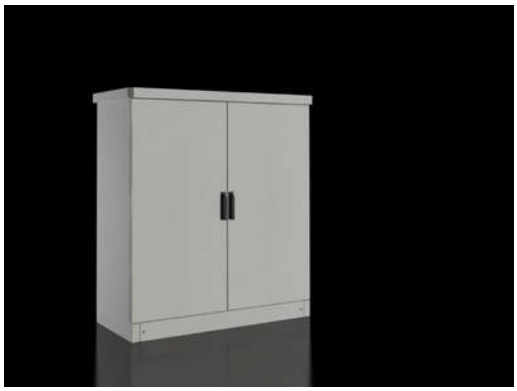

Product description

Description:	Outdoor enclosure with 100 mm transport plinth and rain canopy with projections on all sides.
Material:	Aluminium AlMg3
Surface finish:	Powder-coated UV-resistant pure polyester
Colour:	RAL 7035
Protection category IP to IEC 60 529:	IP 55
Protection category NEMA:	NEMA 3R
IK Code:	IK07
Supply includes:	Single-walled outdoor enclosure, fully preconfigured Basic enclosure with gland plate, three-part 25 mm system punchings in the roof, base, front and in the enclosure depth Front door(s) with door stay, swing lever handle and semi-cylinder, lock BJ 20027 Transport plinth with screw-fastened trim panels front and rear Enclosure width 1200 mm has two 600 mm wide mounting panels Rain canopy
Basic material:	Aluminium

Product description

Dimensions:	Width: 1200 mm Height: 1200 mm

	Height (base/plinth): 100 mm Height (mounted): 1355 mm Depth: 500 mm
Clearances:	Clearance width: 512 mm Clearance height: 1112 mm Clearance depth: 449 mm
Rain canopy:	Width: 1250 mm Height: 55 mm Depth: 550 mm
Number of doors:	2
Centre bar:	With removable centre bar, 2 lockable doors
Packs of:	1 pc(s).
Weight/pack:	66 kg
EAN:	4028177569218
Customs tariff number:	94032080
ETIM 7.0:	EC000261
ETIM 6.0:	EC000261
eCl@ss 8.0/8.1:	27180101
eCl@ss 6.0/6.1:	27180101
Product description:	CS New Basic enclosure, WHD: 1200x1200x500 mm, aluminum, with 100 mm transport plinth and rain canopy, two doors at the front

Approvals

Declarations:	Declaration of conformity