



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3167: UPDATE DWG FORMAT	1/22/08	D.GRIFFIN
F	ECN 3776: UPDATED DIMENSIONS AND NEW FORMAT	12/31/08	D.FRISIELLO

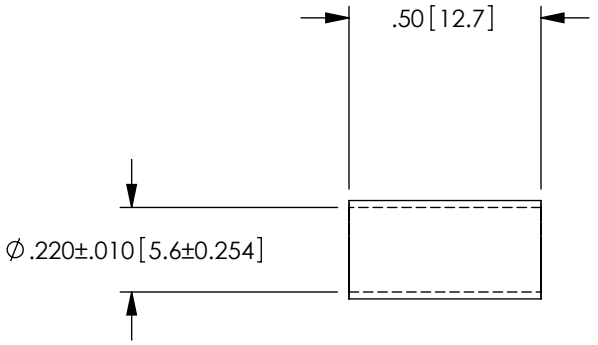


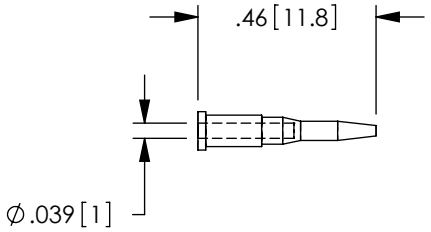

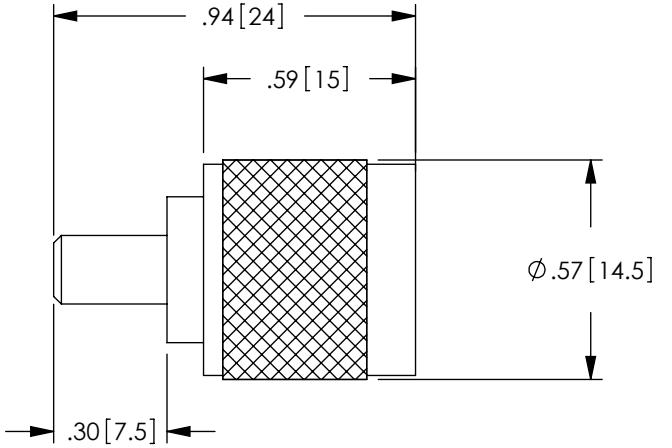

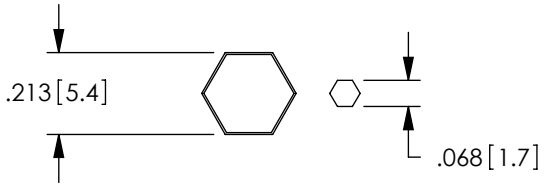

RECOMMENDED FERRULE & PIN CRIMP SIZES

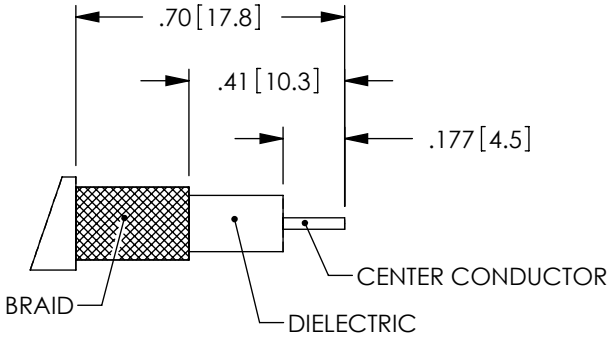

RECOMMENDED CABLE STRIPPING DIMENSIONS

NOTES:

MATERIAL:
BODY: BRASS
SHELL: BRASS
FERRULE: BRASS
CENTER PIN: BRASS
INSULATOR: ACETAL
RETAINING RING: BRASS
GASKET: RUBBER

FINISH:
BODY: NICKEL PLATE
SHELL: NICKEL PLATE
FERRULE: NICKEL PLATE
PIN: GOLD PLATE
RETAINING RING: NICKEL PLATE

MISCELLANEOUS:
IMPEDANCE: 50 OHMS.
INDIVIDUALLY PACKAGE EACH ASSEMBLY UTILIZING APPROPRIATE SIZED BAG.
RG58 COAX CABLE ASSEMBLIES.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
.X = .3
.XX = .15

PROJECTION

APPROVALS		DATE
DRAWN BY	C.MCCORMICK	11/13/2001
CHECKED BY	D.PARHAM	11/13/2001
APPROVED BY	R.CARRICK	11/13/2001

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
CONN TNC M RG58 CRIMP

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BAC893-58	F

SCALE: NONE | CAD FILE: BAC893-58.SLDDRW | SHEET 1 OF 1