prevost

COMPRESSED AIR EXPERT

Prevost
DRFB Hose reel

The new DRFB generation for enhanced visibility and safety



Reinforced safety model

New

Safety yellow PU hose
for greater visibility on workstations

Anti-whiplash coupling allows decompression and disconnection of pneumatic tools in a single movement

BRITISH PROFILE • BRITISH PROFILE • BRITISH PROFILE
6 mm

Equipped with safety quick coupling
prevoS1



New

Quick mounting system



New

3 possible hose orientations

+ BENEFITS

- Safety spring mechanism ensures controlled hose return
- Locking system holds hose at desired length
- Anti-twist pipe protectors
- Yellow limit switch

prevost

COMPRESSED AIR EXPERT

FEATURES

- Galvanised steel housing with UVre-sistant polyester-based electrostatic powder coating, treated steel spring.
- Air inlet: connection via 1 m supply hose provided, fitted on 360°rota-ting coupling protected by a plastic cover
- 180° swivel bracket, wall or overhead mounting
- Fluid: compressed air

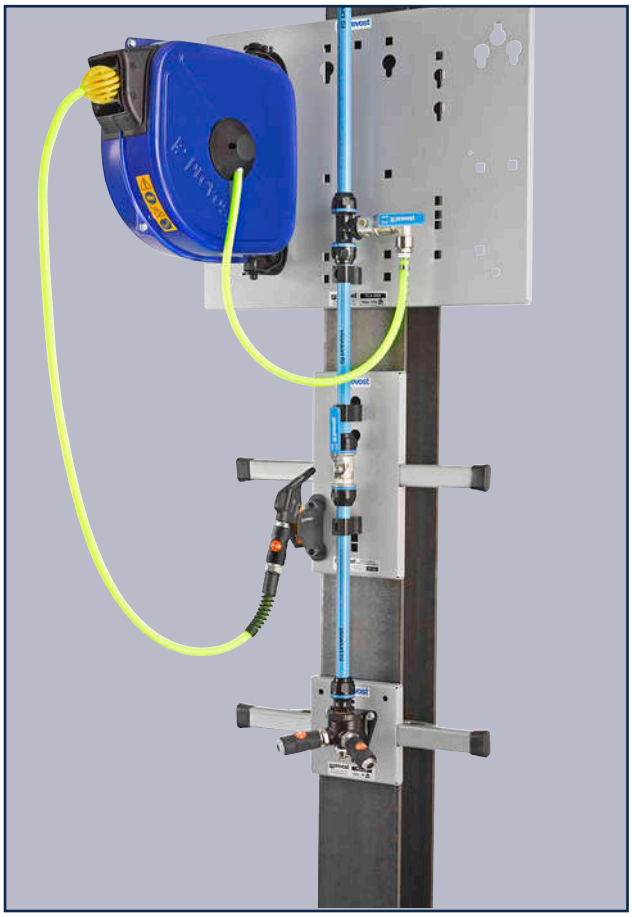

Références	Air outlet quick connnection fiiting	Ø Hose (mm)	Hose length (m)	Hose reel outlet thread	Pressure (bar)	Flow rate (l/min at 6 bar)	Weight (Kg)	A	B
DRFB 0812BS	ISI 06	8x12	12	G 1/4 M	12	500	5.8	340	302
DRFB 0815BS	ISI 06	8x12	15	G 1/4 M	12	350	7.1	370	337
DRFB 1010BS	ISI 06	10x14	10	G 3/8 M	12	833	5.7	340	302
DRFB 1012BS	ISI 06	10x14	12	G 3/8 M	12	800	7	370	337
DRFB 0812ES	CSI 06	8x12	12	G 1/4 M	12	500	5.8	340	302
DRFB 0815ES	CSI 06	8x12	15	G 1/4 M	12	350	7.1	370	337
DRFB 1010ES	CSI 06	10x14	10	G 3/8 M	12	833	5.7	340	302
DRFB 1012ES	CSI 06	10x14	12	G 3/8 M	12	800	7	370	337

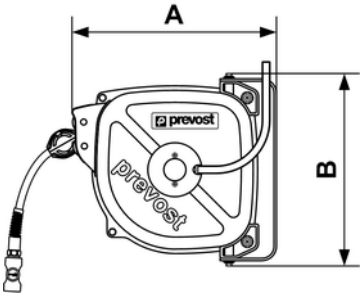

Temperature: -15°c to + 65°c

Prevost SAS - Parc d'Activités des Glaisins - 15 rue du pré faucon - C.S. 90208 - 74942 Annecy-le-Vieux -
France Tel : +33 (0)4 50 64 04 45 - sales@prevost-ltd.co.uk - www.prevost.eu