MURR ELEKTRONIK
stay connected

M12 FEMALE 0° B CODED SHIELDED WIREABLE SCREW TERM.


2 POLE max. 0.75mm² 6-8mm PROFIBUS

M12
Female straight
Field wireable (screw terminals)
B-coded, 2-pole, shielded

Link to Product

Illustration




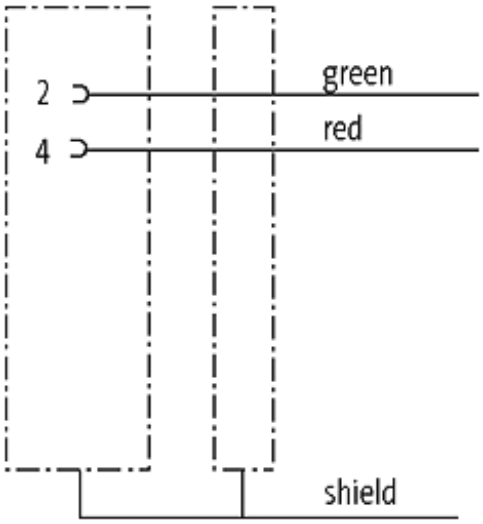


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/16

MURR ELEKTRONIK
stay connected

Female

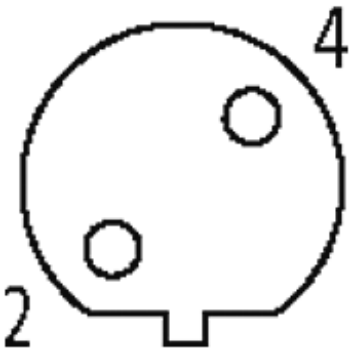

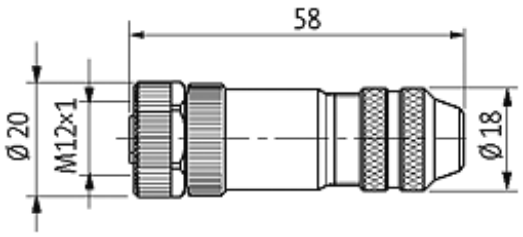

Product may differ from Image

Form	
Form	14025
Technical Data	
Operating voltage	max. 125 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm²
Sealing range (cable Ø)	6...8 mm
Housing	CuZn, nickel plated
Protection	IP67 inserted and tightened (EN 60529)
General data	
Temperature range	-25...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85369010
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/16