MURR ELEKTRONIK
stay connected

MOTOR SUPPRESSOR


RC, 3x400...575VAC/4kW


3× 400 V AC
3× 575 V AC
RC
For DIN-rail mounting use Art.-No. 20900 adapter feet
Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration



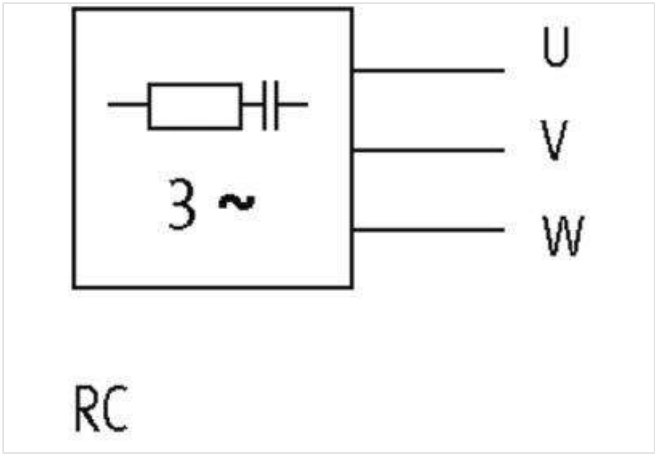

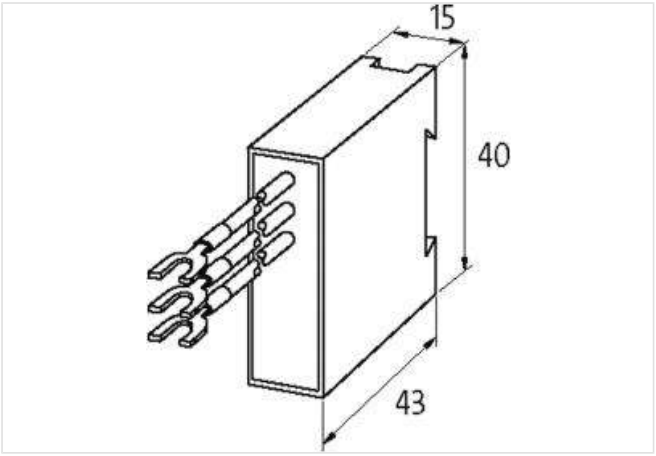

Product may differ from Image

Technical Data

Frequency	50...60 Hz
Input voltage	575...575 V AC
Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17

General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+60 °C
Connection	approx. 200 mm, single cores 0.35 mm² self-securing fork terminal ends M4
Dimensions H×W×D	43×15×40 mm
Product article number of manufacturer	23050

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17