THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
C	ECN 7890: UPDATED FORMAT, PACKAGING, ROHS	4/2/15	D. DESJARDIN

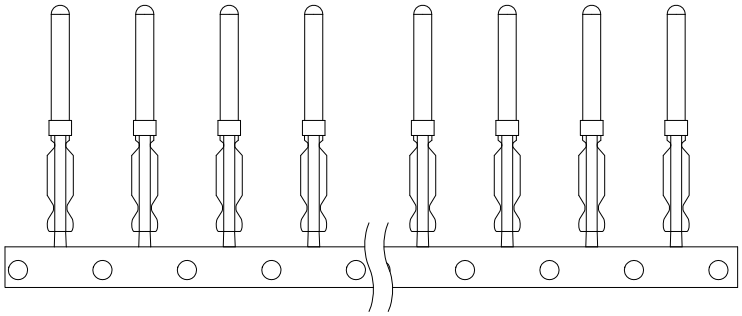

CPM
STANDARD MALE PINS, 24-28 AWG

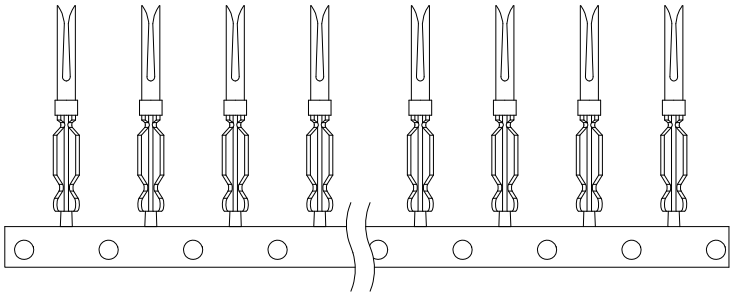

CPF
STANDARD FEMALE CONTACTS, 24-28 AWG

P/N	GENDER	QUANTITY	GOLD PLATING
CPM10	MALE	10 / STRIP	FLASH
CPF10	FEMALE	10 / STRIP	FLASH
CPM10-30U	MALE	10 / STRIP	30µINCHES
CPF10-30U	FEMALE	10 / STRIP	30µINCHES
CPM100	MALE	100 / STRIP	FLASH
CPF100	FEMALE	100 / STRIP	FLASH
CPM100-30U	MALE	100 / STRIP	30µINCHES
CPF100-30U	FEMALE	100 / STRIP	30µINCHES

NOTES:

1. 10 / STRIP CONTACTS ARE PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

C 2. 100 / STRIP CONTACTS ARE PACKAGED IN AN APPROPRIATELY SIZED BOX IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / - 0
>12 [305] - 60 [1524] = +2 [51] / -0
>60 [1524] - 120 [3048] = +4 [102] / -0
>120[3048] - 300[7620] = +6 [152] / -0
>300[7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = .2 [5.08]
.XX = .02 [.51]
.XXX = .005 [.13]

PROJECTION

APPROVALS	DATE
DRAWN BY D. PARHAM	06/18/2009
CHECKED BY M. MARTINEZ	06/18/2009
APPROVED BY S. SMITH	06/18/2009

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
D-SUBMINIATURE

PRODUCT DESCRIPTION
CRIMP CONTACT

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CPF10	C

SCALE: 2:1 | CAD FILE: CPF10.SLDDRW | SHEET 1 OF 1