HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

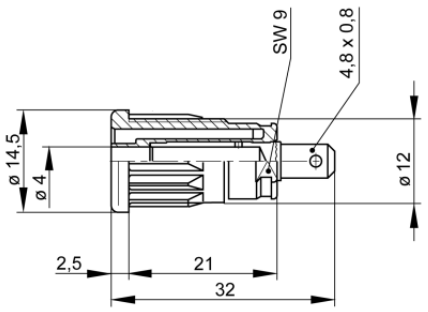
Sockets

4 mm safety system

SEP 2610 F4,8



CE

Product	SEP 2610 F4,8
description	Safety press-in socket, 4 mm diameter, contact-protected, with 4.8 x 0.8 tab connector complying with DIN 46 244, gold-plated brass. For rapid installation into switchpanels with wall thicknesses between 1-10 mm. Installation hole: Ø12.2 ±0.1 mm Entry chamfer: 0.5 x 45°
operating instruction	BA454
article-no. / *colour	9723611xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 88 yellow green Au
drawing	
	
technical data	
connection	flat connector 4.8 x 0.8 mm
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	24 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010(1)	-40 °C to +80 °C

inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

(1) contact the manufacturer for applications at deviating temperature ranges
stand: 21.06.2022

stand: 21.06.2022