

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/08/03	B.MAZEJKA
B	ECN 3196: UPDATE DWG FORMAT	2/13/08	D.GRIFFIN
C	ECN3680, ADDED PACKAGING TABLE	2008.10.30	E. STAUBLE
C	ECN99999:REMOVED PACKAGE IN POLYBAG NOTE	11/10/08	D.GRIFFIN

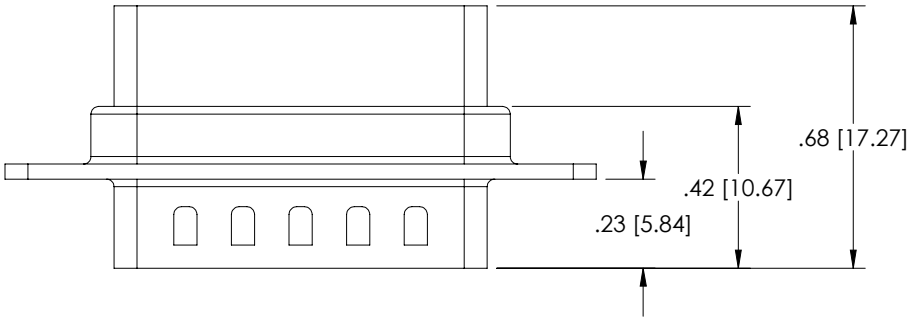

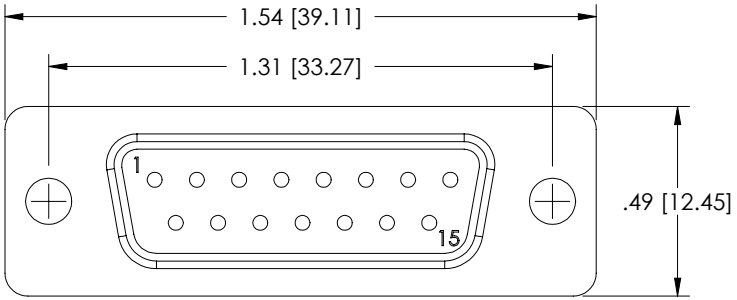

NOTES:

MATERIAL:
SHELL: STEEL
INSULATOR: PBT W/GLASS FIBER FILL (UL 94V-0 RATED)

FINISH:
FRONT SHELL: BRIGHT TIN/NICKEL PLATED
REAR SHELL: BRIGHT TIN PLATED

CATALOG #	PACKAGING
C&P15M	1/BAG
C&P15M-TRAY	50/TRAY

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] - 60 [1524] = +2 [51] / -0 >60 [1524] - 120 [3048] = +4 [102] / -0 >120[3048] - 300[7620] = +6 [152] / -0 >300[7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	APPROVALS / DATE DRAWN BY B.MAZEJKA 11/10/2003 CHECKED BY C.McCORMICK 12/08/2003 APPROVED BY D.PARHAM 12/08/2003	L-com CONNECTIVITY PRODUCTS 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY: DSUB PRODUCT DESCRIPTION: DB15M CRIMP & POKE CONNECTOR
PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A · FSCM NO. 43321 · DWG. NO. C&P15M · REV. C
	REF	SCALE: NONE · CAD FILE: C&P15M.SLDDRW · SHEET 1 OF 1