

67 Concealed Pull

Surface mount


- **Flush mounting**

Material and Finish

10 series: Plastic, black or zinc alloy, black or silver
20 & 40 series:
Handle: Aluminum, silver or black powder coated
Housing and bushing: Plastic, black
Screws: Stainless steel, passivated

Performance Details

Maximum static load:
10 series: 620 N (140 lbf) - plastic
10 series: 1100 N (250 lbf) - metal
20 series: 440 N (100 lbf)
40 series: 580 N (130 lbf)



Flammability rating:
Housing & bushing: UL94-HB
Handle (10 Series plastic only): UL94-V2


Installation Notes

Thread forming screw (M4 x 0.7 (10 series metal) M4.2 x 1.4 (all other versions)) supplied for door thickness 6.4 (.25) Maximum.
For thicker doors calculate screw length using the following formula: Door thickness + 10 (.40)


Notes

Maximum tightening torque of mounting screws:
All versions except 10 series metal: 0.5 N•m (5 in•lbf)
10 series metal version: 2.5 N•m (18 in•lbf)

10 Series - Plastic

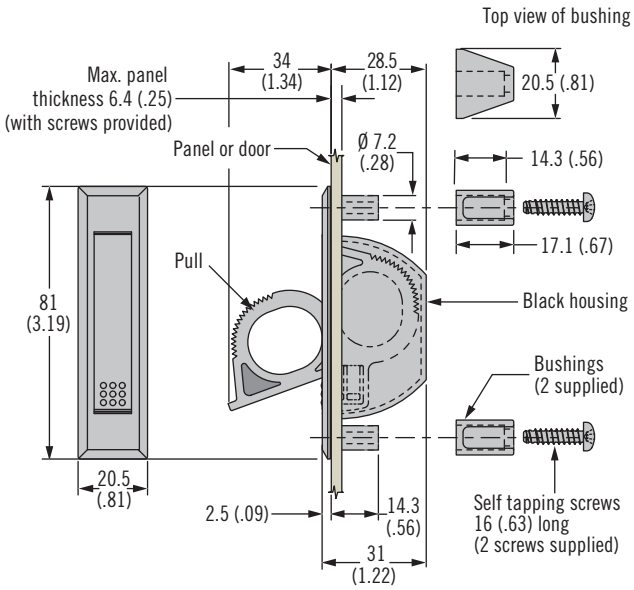

10 Series - Metal with Push Button Handle Release

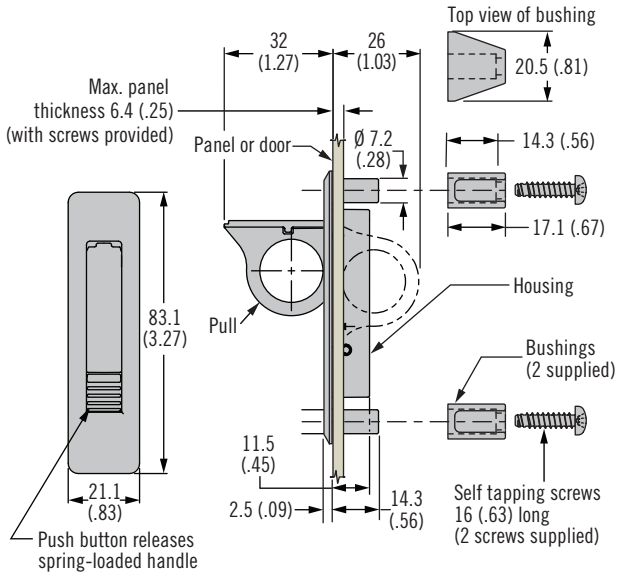


Other options available. For complete details on variety, part numbers, installation and specification, go to

INFO CLIC


www.southco.com/67

Dimensions in millimeters (inch) unless otherwise stated

20 Series

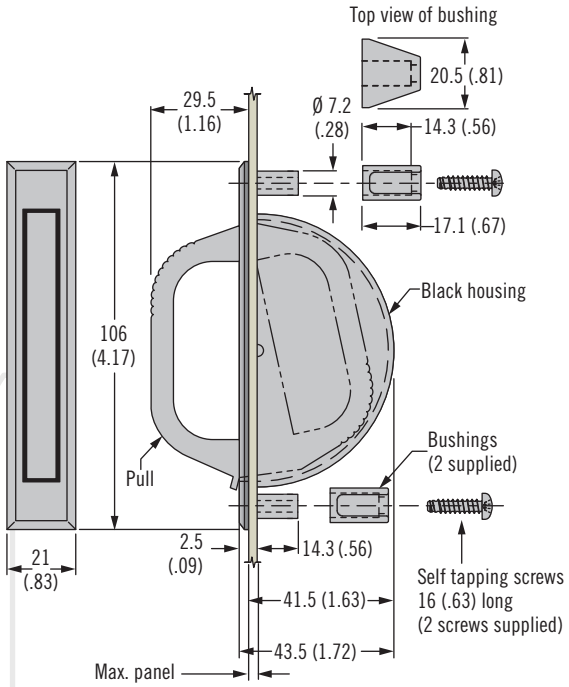

40 Series

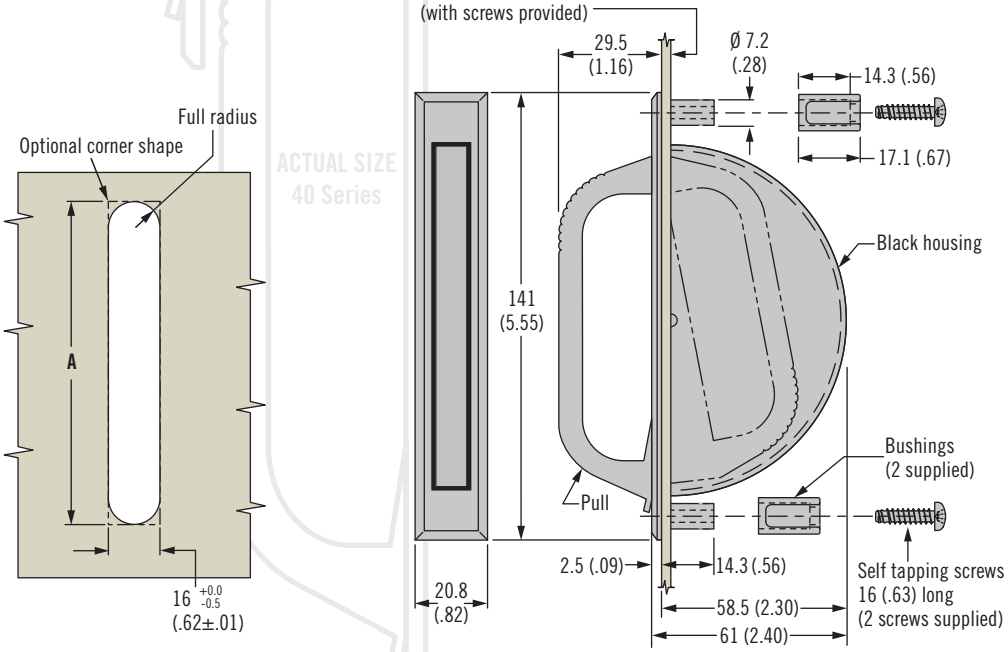

Series	Part Number		Installation
	Silver Handle	Black Handle	A
10-Plastic	~	67-10	$76^{+1.0}_{-.00}$ ($3.00^{+.04}_{-.00}$)
10-Metal	67-14	67-12	$77.5^{+1.0}_{-.00}$ ($3.05^{+.04}_{-.00}$)
20	67-27	67-25	$102^{+1.0}_{-.00}$ ($4.00^{+.04}_{-.00}$)
40	67-47	67-45	$136^{+1.0}_{-.00}$ ($5.35^{+.04}_{-.00}$)

Part Number

See table

Other options available. For complete details on variety, part numbers, installation and specification, go to

INFO CLIC

www.southco.com/67

Dimensions in millimeters (inch) unless otherwise stated