
Inductive Sensors

BES M18MD-NOC80B-BP05-003
Order Code: BES0494

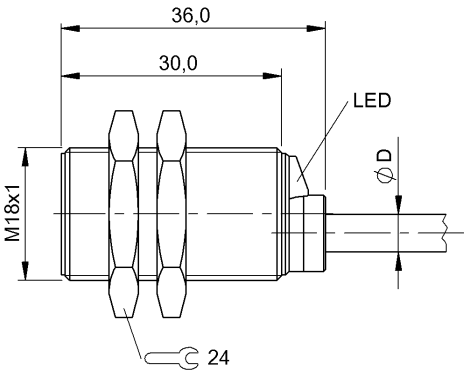

Basic features

Approval/Conformity	cULus CE EAC WEEE
Basic standard	IEC 60947-5-2
Trademark	Global

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Cable diameter D	4.60 mm
Cable length L	5 m
Conductor cross-section	0.34 mm²
Connection type	Cable, 5.00 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 µF
Min. operating current Im	0 mA
No-load current Io max., damped	12 mA
No-load current Io max., undamped	25 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	2.0 kOhm + D + LED
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	130 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	10 ms
Residual current Ir max.	80 µA
Ripple max. (% of Ue)	15 %
Switching frequency	150 Hz
Utilization category	DC -13
Voltage drop static max.	3.8 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g_n, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Interface

Switching output	NPN normally closed (NC)

Inductive Sensors

BES M18MD-NOC80B-BP05-003
Order Code: BES0494

Material

Housing material	Brass, nickel plated
Material jacket	PUR
Material sensing surface	PBT

Mechanical data

Dimension	Ø 18 x 36 mm
Installation	for flush mounting
Size	M18x1
Tightening torque	25 Nm

Range/Distance

Assured operating distance Sa	6.4 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	8 mm
Real switching distance sr	8 mm
Repeat accuracy max. (% of Sr)	5.0 %
Switching distance marking	■■
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

The sensor is functional again after the overload has been eliminated.
Flush: See installation instructions for inductive sensors with extended range 825357.

Wiring Diagrams

