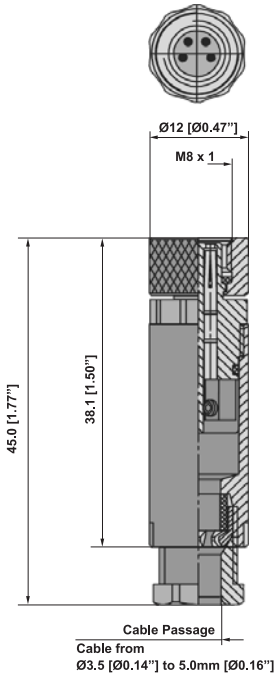
RKMCK

PICO (M8) Field Attachable Connector, Female Straight, Screw Termination, 3 and 4 pole, 60V AC/75V DC, Cable Range 3.5 - 5mm, brass coupling nut, for Wire Size from 26AWG up to 20 AWG, IP 67 / NEMA 6P Rated.







Technical Data

Material	
Insert	PUR
Contact	Brass, gold over nickel plated
Body	Brass, over nickel
Electrical	
Current Rating	3A
Voltage Rating	60 V AC / 75 V DC
Mechanical	
Temperature	-40°C to + 85°C
Protection	IP 67, NEMA 6P
Termination	Terminal Screws
Max. Wire Size	0.14 - 0.5mm² max

Features & Benefits

IP67/NEMA 6P rated. Easy assembly with screw terminals. Wire gauges from 0.14mm2 to 0.50mm2 (26 AWG to 20 AWG). Gold over nickel plated brass contacts. Cable exit allowing cable OD from 3.5 mm to 5mm (.138" to .197").

Face Views / Pin Color Code

3P Female	4P Female
	

Part Number	Poles	Gender
RKMCK 3	**3**	**Female**
RKMCK 4	**4**	

Copyright © 2005. Lumberg, Inc. All rights reserved. Printed in the United States Of America AC FAST DS RKMCK 3/4 0105

Lumberg, Inc. • 14121 Justice Road • Midlothian, VA 23113-USA • Tel: 804.379.2010 • Fax: 804.379.3232 • info@lumbergusa.com