
Inductive sensor

BES 516-324-E4-C-S4-00,3
BES00N9

BALLUFF
sensors worldwide

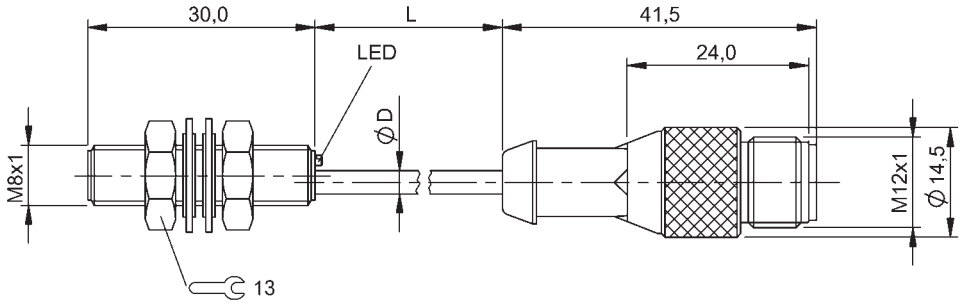


- **PNP**
- **Normally open (NO)**
- **1.50 mm**
- **Flush (shielded)**


- **Cable with connector, PUR, 0.30 m**
  M12x1-S04

LISTED IND. CONT. EQ. 81U2 for use in the secondary of a class 2 source of supply

IND. CONT. EQ 81U2 for use in the secondary of a class 2 source of supply Environmental - Type 1 Enclosure

General attributes	
Approvals / Conformity	CE cULus EAC
Basic standard	IEC 60947-5-2
Enclosure Type per IEC 60529	IP68 according to BWN PR 20
Function indicator	Yes
Polarity reversal protected	Yes
Power indicator	No
Protection Class	II
Short circuit protected	Yes
MTTF	830 a
Electrical attributes	
Connection type	Cable with connector
Eff. operating current Ie	200 mA
Eff. operating voltage Ue DC	24.0 V
Electrical version	DC, direct current
Load capacitance max. (at Ue)	0.500 µF
Max. no-load cur. Io undamped	3.0 mA
Minimum operating current Im	0 mA
No-load current Io damped max.	9.0 mA
Operating voltage UB max. DC [V]	30.0 V
Operating voltage UB min. DC [V]	10.0 V
Rated insulation voltage Ui	250 VAC
Rated short circuit current	100 A
Ripple max. (% of Ue)	15 %
Switching freq. f max. (at Ue)	2500 Hz
Switching function	Normally open (NO)
Switching output	PNP
Voltage drop static max.	2.5 V
Mechanical attributes	
Ambient temperature Ta max.	70 °C
Ambient temperature Ta min.	-25 °C
Assured operating distance Sa	1.20 mm
Cable diameter D max.	3.1 mm
Cable jacket material	PUR
Cable length	0.30 m
Connector type	M12x1-S04
Depth	30.0 mm
Diameter d1	M08x1
Eff. operating distance Sr	1.50 mm
Housing material	Stainless steel
Mech. installation condition	Flush (shielded)
Mounting length	30.0 mm
Rated operating distance Sn [mm]	1.50 mm
Sensing face material	PBT
Tightening torque	8 Nm





Remarks
The sensor is functional again after the overload has been eliminated.

For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.