# E12422

## Ethernet connection cable

VSTGN040ZDS00,5L04STGN040ZDS

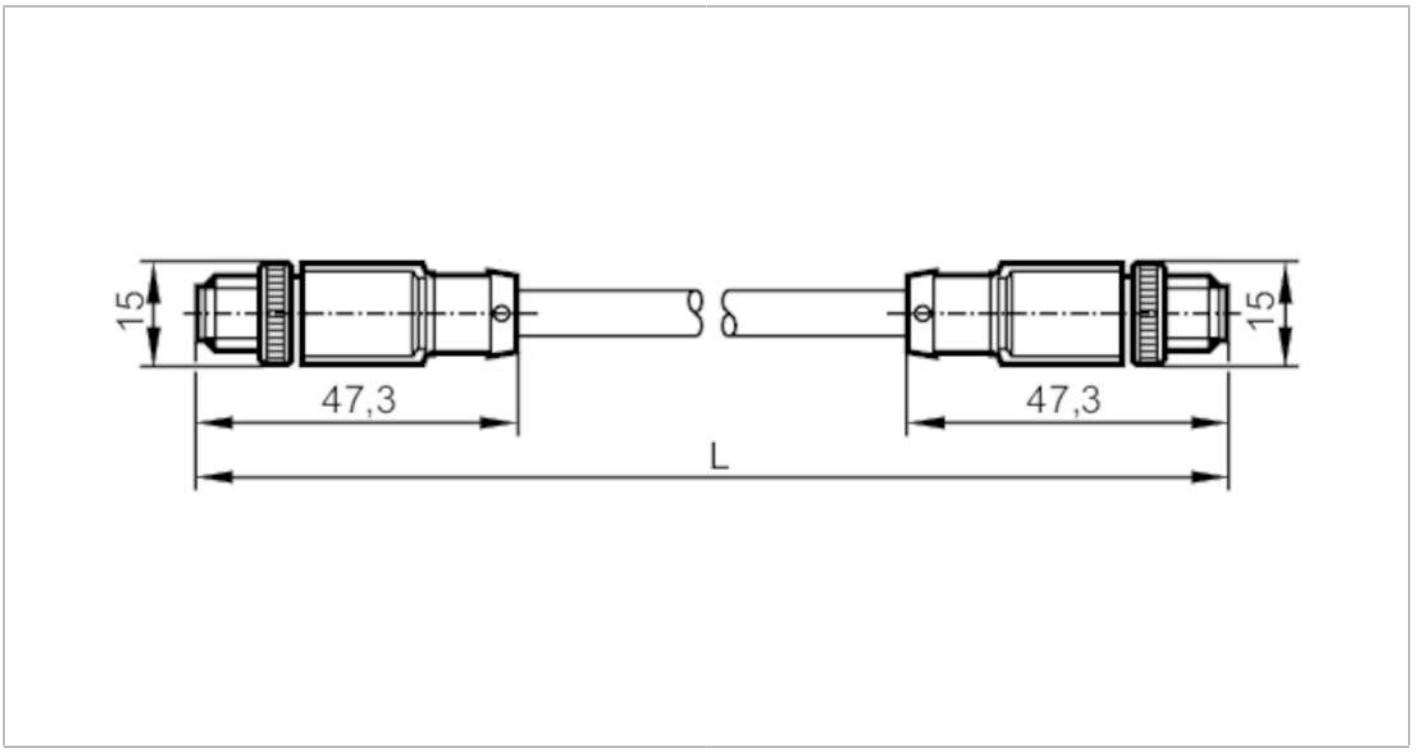


CE

| | | |
|---|---|---|
| **Application** | | |
| Special feature | | Gold-plated contacts; Screened cable |
| Design | | Ethernet cable, D-coded |
| **Electrical data** | | |
| Operating voltage | [V] | < 50 AC / < 60 DC |
| Protection class | | III |
| Max. current load total | [A] | 4 |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -20...90 |
| Protection | | IP 67 |
| **Mechanical data** | | |
| Weight | [g] | 66.1 |
| Dimensions | [mm] | 15 x 15 x 47.3 |
| Materials | | TPU |
| Moulded-body material | | TPU |
| Material nut | | diecast zinc, nickel-plated |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |

# E12422

## Ethernet connection cable

VSTGN040ZDS00,5L04STGN040ZDS

### Electrical connection - plug

Connector: 1 x M12, straight; coding: D; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected




### Electrical connection

Cable: 0.5 m, PVC, green, shielded; 4 x 0.34 mm²

Connection

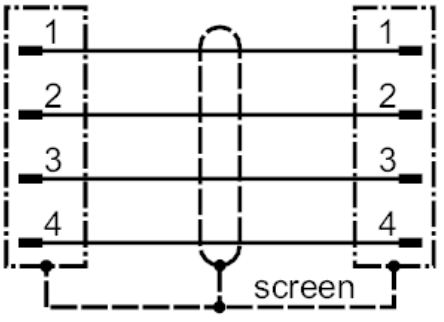


### Electrical connection - plug

Connector: 1 x M12, straight; coding: D; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

