
11BGC09T4A230

CHANGEOVER ASSEMBLY, AC COIL, BUILT-IN INTERLOCK ONLY, 20A AC1 IN AC. COIL VOLTAGE 230VAC 50/60HZ



Product designation			Changeover contactor assemblies
Product type designation			BGC09
Electrical features			
Maximum operating current (≤440V)		A	20
Contact characteristics			
Operational current Ie			
	AC-1 (≤40°C)	A	20
	AC-1 (≤55°C)	A	18
	AC-1 (≤60°C)	A	15
Rated operational power AC-1 (T≤40°C)			
	230V	kW	8
	400V	kW	14
	500V	kW	16
	690V	kW	22
UL technical data			
UL/CSA General Use		A	20
Mechanical features			
Terminals type			Clamp screw
Weight		g	365

Dimensions

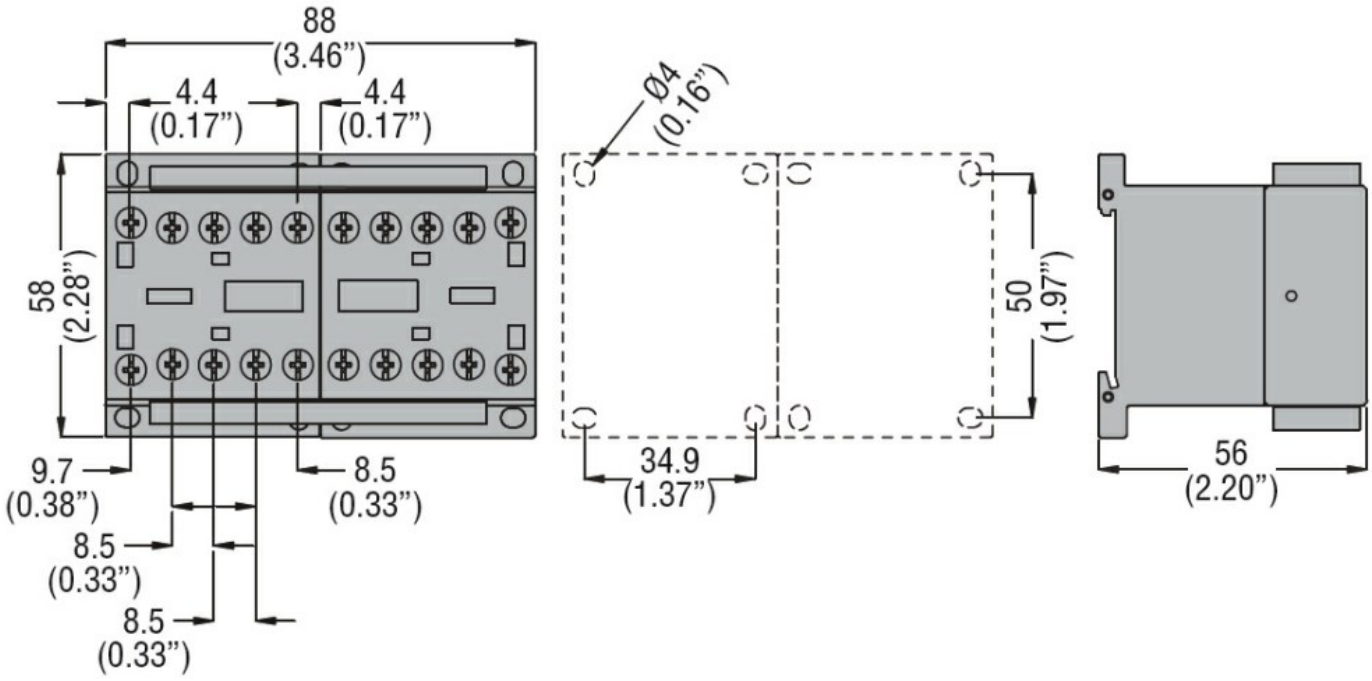


Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

11BGC09T4A230

CHANGEOVER ASSEMBLY, AC COIL, BUILT-IN INTERLOCK ONLY, 20A AC1 IN AC. COIL VOLTAGE 230VAC 50/60HZ

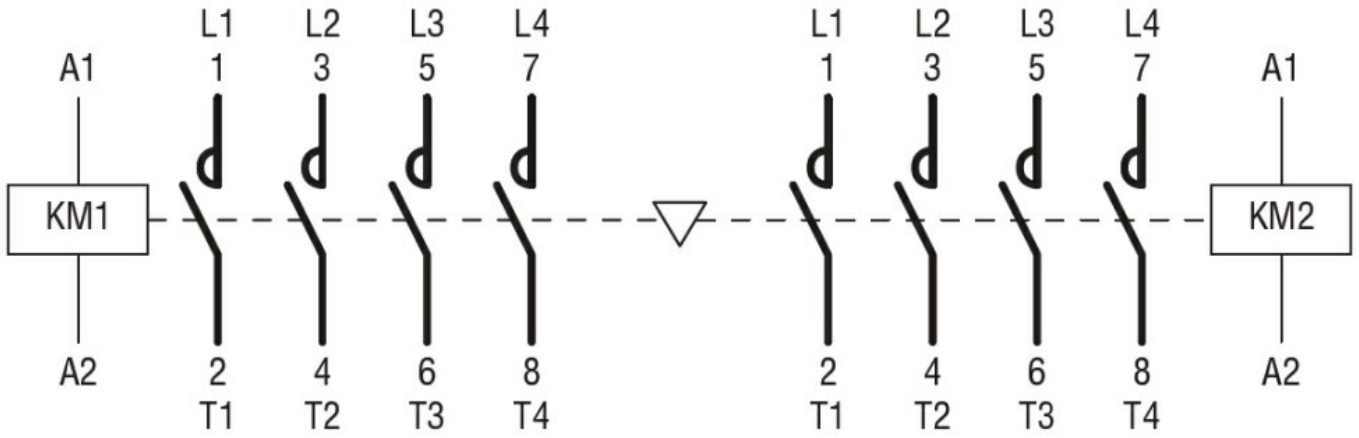

Certifications and compliance

Compliance

	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508 CSA C22.2 n° 14

Certificates

	cULus

ETIM classification

ETIM 8.0	EC000010 - Combination of contactors

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding