
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/28/08	D.GRIFFIN
B	ECN 4278: ADDED OPERATING TEMPERATURE RANGE AND PACKAGING	10/1/09	D.FRISIELLO
C	ECN 4504: CHANGED THUMBSCREW FROM STEEL TO BRASS	1/19/10	D.FRISIELLO

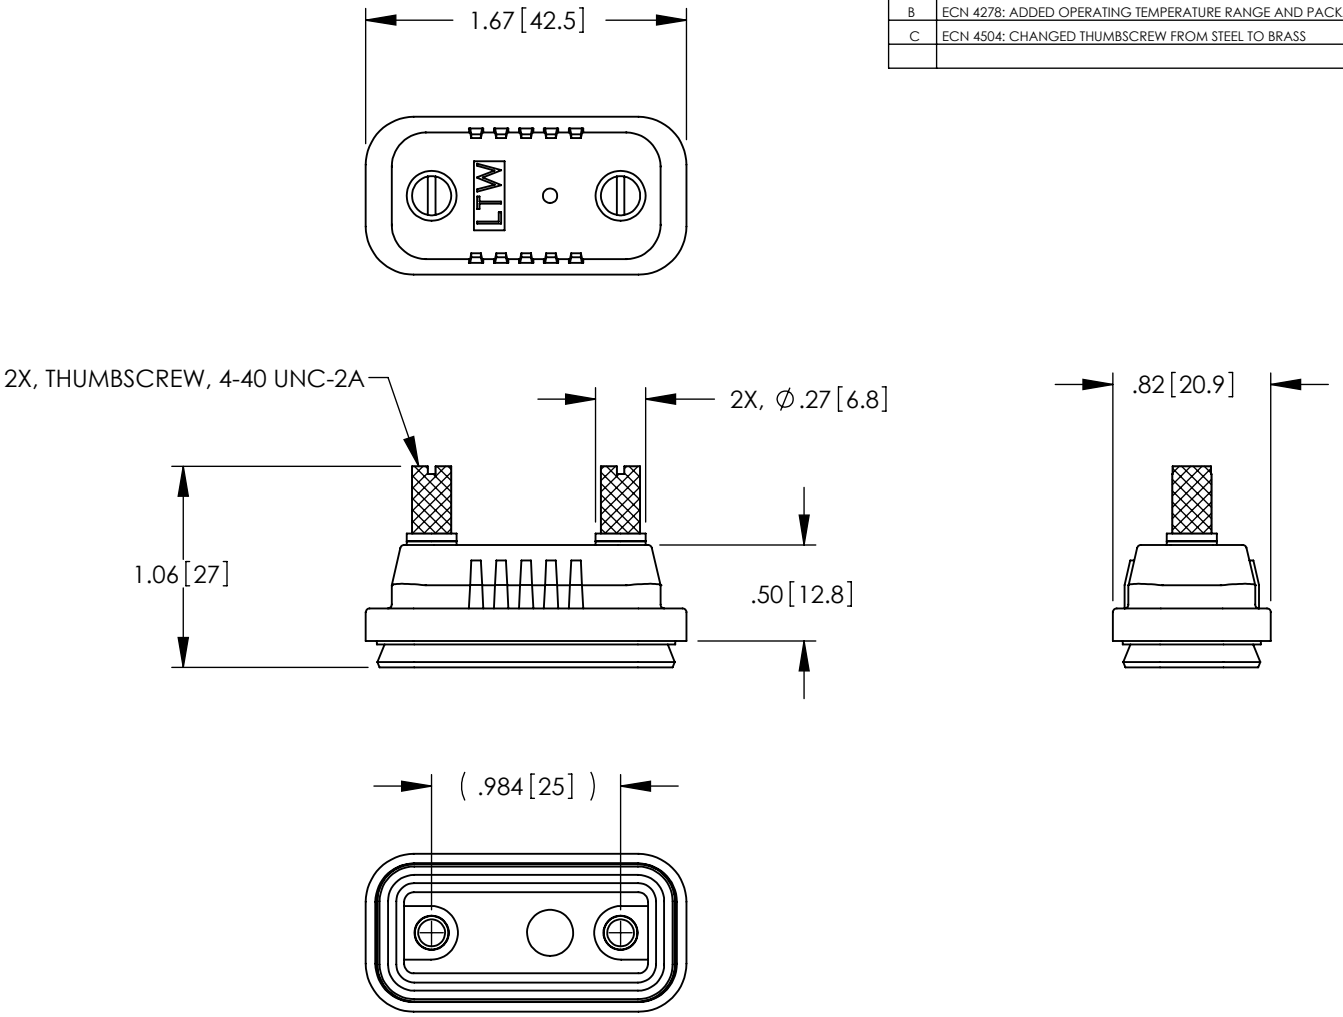

NOTES:

MATERIAL:
HOUSING: ABS, BLACK
GASKET: EPDM, BLACK
THUMBSCREW: BRASS, WITH NICKEL PLATING AND DIAMOND KNURLING.

WATERPROOF RATING: IP67.

OPERATING TEMPERATURE RANGE: -40°C TO +105°C.

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

DIMENSIONAL TOLERANCES:
.X = ±.1
.XX = ±.02
.XXX = ±.005

ANGULAR TOLERANCES:
ALL = ± 1°

PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	5/22/08
CHECKED BY D.FORTIN	5/22/08
APPROVED BY S.SMITH	5/22/08

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity

45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: D-SUB

PRODUCT DESCRIPTION: COVER, WATERPROOF, DB9 / HD15

SIZE: A | FSCM NO.: 43321 | DWG. NO.: WPSD1-CVR | REV.: C

SCALE: NONE | CAD FILE: WPSD1-CVR.SLDDRW | SHEET 1 OF 1