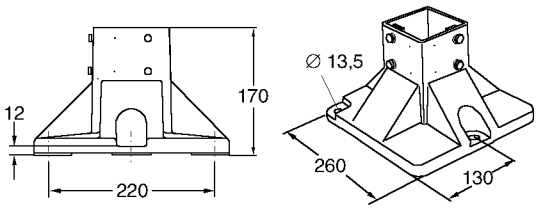
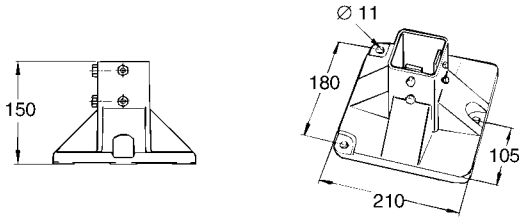
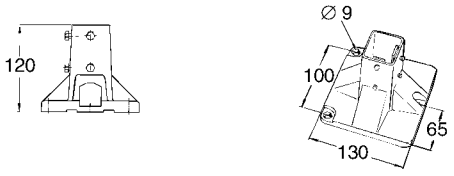
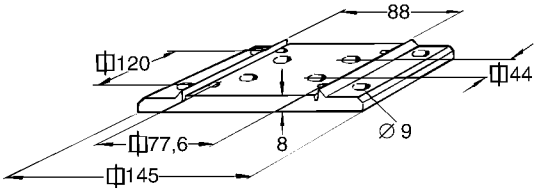
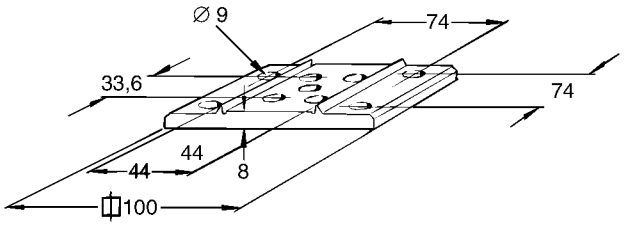


# Feet

| | | |
|---|---|---|
| | Feet<br>Including fastener kit<br>Aluminium, die-cast |  |
| **XCFF 88×260** | Foot for beam XCBM/ XCBL ..×88<br>Max. bending moment 1500 Nm | |
| **XCFF 64×210** | Foot for beam XCBM/ XCBL ..×64<br>Max. bending moment 750 Nm |  |
| **XCFF 44×130** | Foot for beam XCBM/ XCBL ..×44<br>Max. bending moment 250 Nm |  |
| **XCFB 88 F** | Foot plate for beam XCBM/XCBL ..×88<br>Aluminium, anodized<br>Mounting:<br>MF6S 8×30 (4)<br>or MF6S 6×30 (4)<br>Max. bending moment 200 Nm |  |
| **XCFB 44 F** | Foot plate for beam XCBM/XCBL ..×44<br>Aluminium, anodized<br>Mounting:<br>MF6S 8×30 (1)<br>or MF6S 6×30 (4)<br>Max. bending moment 50 Nm |  |
| | Adjusting foot<br>Including nut<br>Steel, electro-zinc-plated |  |
| **XCFS 12×68** | M12 thread<br>Mounting: XCFE .. M12<br>Max. vertical load 2500 N | |
| **XLFS 8** | M8 thread<br>Max. vertical load 400 N | |
| | Guide rollers<br>Including fastener kit<br>Steel, electro-zinc-plated<br>Mounting: XCAN 8 or XCFE .. M12<br>Max. vertical load 600 N |  |
| **XCAG 80 A**<br>**XCAG 80 BA** | Guide roller<br>Guide roller with multistop brake | |