
Laserliner

# DuoView Camera



## Camera unit for VideoFlex with additional side camera and lighting


- Camera unit for VideoFlex
- Front and side camera for quick change of view at the touch of a button
- 4 high-performance, high-intensity LEDs on the front camera for powerful object lighting and 2 LEDs on the side camera
- For inspecting highly inaccessible locations such as cavities, shafts, masonry or in vehicles
- Waterproof camera head and cable
- Compatible with G3/G4

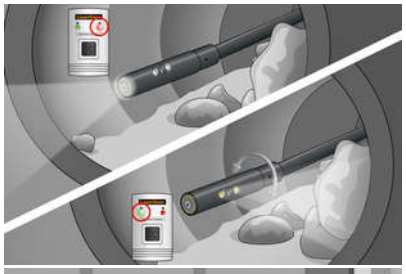



### TECHNICAL SPECIFICATIONS

| | |
|---|---|
| **CAMERA TYPE** | CMOS image sensor |
| **CAMERA HEAD** | ø 9 mm |
| **CAMERA HEAD PROTECTION CLASS** | water-resistant, IP 67 |
| **CAMERA HEAD LEDS** | Front: 4 / Side: 2 |
| **CAMERA RESOLUTION** | 640 x 480 pixels |
| **FIELD OF VIEW (FOV)** | 57° |
| **CAMERA FOCUS** | Front: F3 cm - F5 cm / Side: F1 cm - F5 cm |
| **CABLE DIAMETER** | 6 mm |
| **LENGTH OF FLEX CABLE** | 1 m |
| **MINIMUM BENDING RADIUS** | 50 mm |
| **OPERATING CONDITIONS** | 0°C … 60°C, max. humidity 20 … 90% rH, no condensation, max. working altitude 4000 m above sea level |
| **STORAGE CONDITIONS** | -20°C … 80°C, max. humidity 80% rH |
| **DIMENSIONS (W X H X D)** | 1100 mm x 30 mm x 24 mm |
| **WEIGHT** | 144 g |

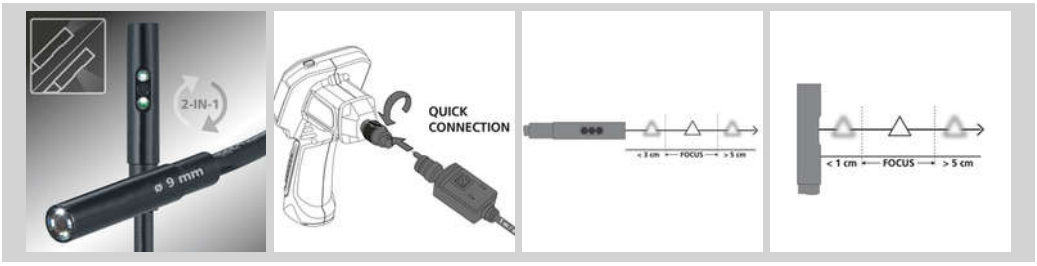





| | | | |
|---|---|---|---|
| DuoView Camera | **ORDER NO.** 082.215A | **EAN-CODE** 4021563707447 | **PU** 1 |

UMAREX GmbH & Co. KG • Donnerfeld 2 • 59757 Arnsberg • Germany • Tel. +49 2932 638-300 • Fax +49 2932 638-333 • info@laserliner.com • www.laserliner.com