Multi-Contact

STÄUBLI

KS2-12L/A



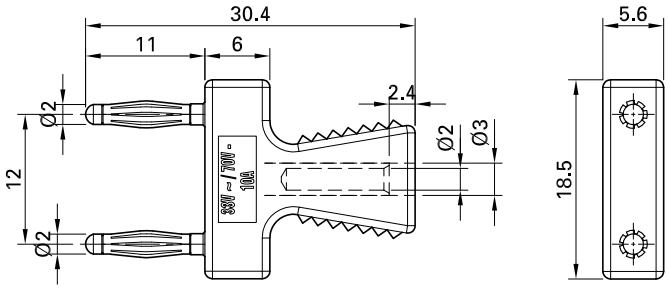

Item number 63.9354-*

Insulated, Ø 2 mm, with rigid Ø 2 mm socket in handling part.

Technical data	
Diameter of plug system	2 mm
Rated Values	30 VAC, 10 A / 60 VDC, 10 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Colours *	21 22 23 24 25
Plug spacing	12 mm
Suitable for	BL2-12/20/A
Test accessory acc. to	IEC EN 61010-031
Remarks	Other colors available on request.

Stäubli Electrical Connectors AG Stockbrunnenrain 8 4123 Allschwil/Switzerland
Tel.: +41 61 306 55 55 Fax: +41 61 306 55 56 ec.ch@staubli.com www.staubli.com

©2018 Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. Data sheet KS2-12L/A 10.2018