

A P E M

X and Y New Series 15 A Toggle Switches

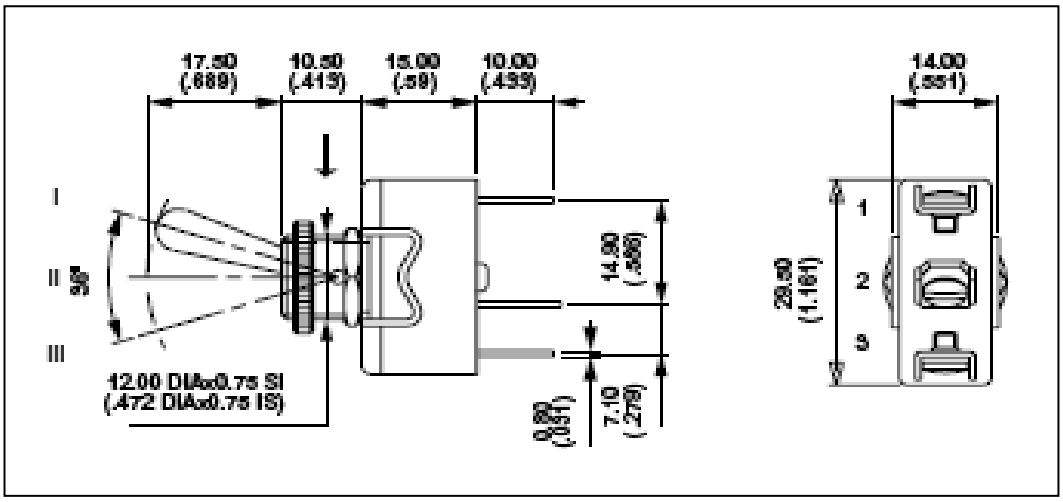

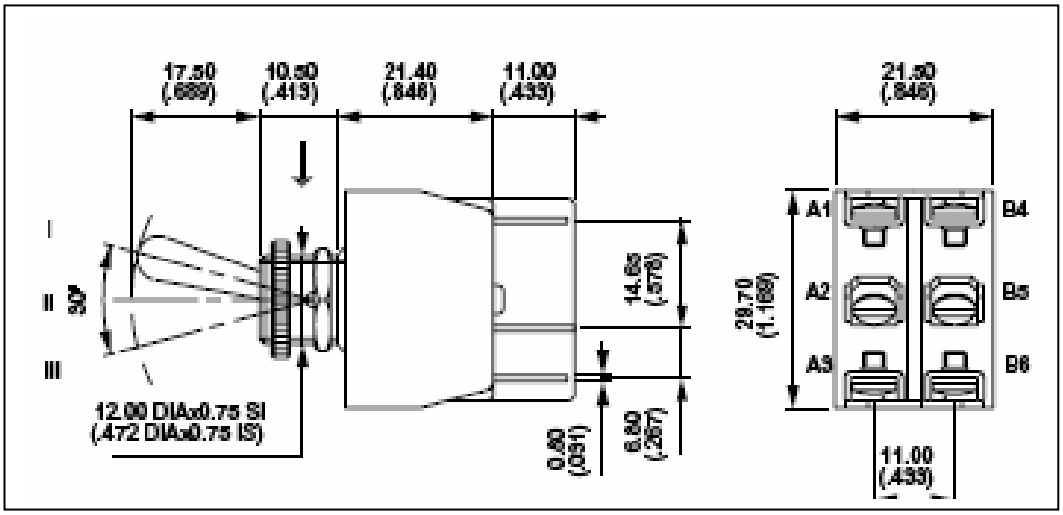

SPECIFICATIONS

Contact ratings (resistive loads):	Functions ON-OFF and ON-ON: 15A 250VAC or 10A 24VDC Functions ON OFF ON: 15A 250VAC

Initial contact resistance:	10 milliohms maximum
Insulation resistance:	1000 megohms min. at 500 VDC
Dielectric strength:	2000 V rms min. - between terminals 2500 V rms min. - between terminals and frame
Electrical life at full load:	10,000 cycles minimum
Operating temperature range:	-20°C to +55°C

APEM COMPONENTS LIMITED

Drakes Drive, Long Crendon, Bucks, HP18 9BA

Tel: +44 (0) 1844 202400 Fax: +44 (0) 1844 202500

Web site: http://www.apem.co.uk e-mail: sales@apem.co.uk

Registered in England No:1730676