stay connected

MIRO TR 24VDC 24VDC 10A FK OPTO-COUPLER MODULE


IN: 53 VDC - OUT: 48 VDC / 10 A

Transistor 10 A
24 V DC
Spring clamp terminals


Link to Product


Illustration



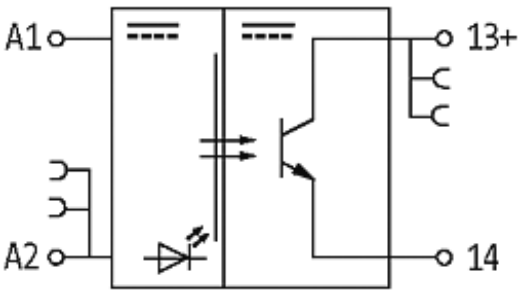

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

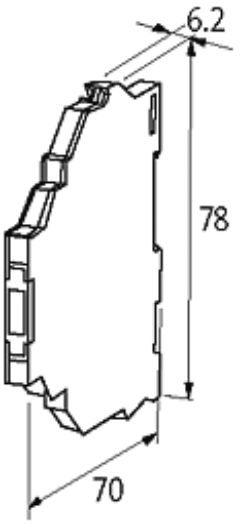

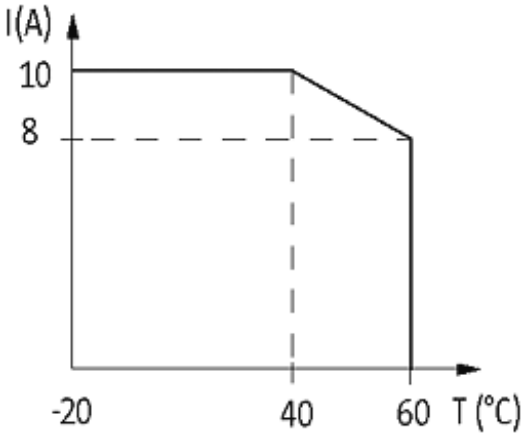

Product may differ from Image

Approvals

Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	10 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	78×6.2×65 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

Switching voltage	5...48 V DC
Switching current per output	1 mA...10 A
Saturation voltage (across output)	max. 0.12 V DC
Leakage current (output is open)	max. 25 µA
Switching time ON/OFF	2/5 ms (10 A load)
Switching frequency	max. 1/0.1 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16