Water separator

Cyclone water separator with float drain




Technical characteristics

Max operating pressure: 16 bar

Temperature: +1°C to +65°C

Construction: Anodised Aluminium

Equipped with: Automatic float drain

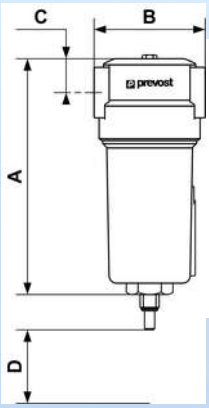

A (mm)	B (mm)	C (mm)	D (mm)	Female thread (BSPP)	Flow rate (m3/h)	Parts Numbers
187	88	20	60	G 1/2	155	**SPC 155**
257	88	20	80	G 3/4	235	**SPC 235**
263	125	32	100	G 1	365	**SPC 365**
461	125	32	140	G 1 1/2	770	**SPC 770**
684	163	43	520	G 2	1280	**SPC 1280**

PREVOST UK - G, Tower Business Park, Commercial Rd, Darwen BB3 0FJ - United Kingdom
Tel. : (+44) 0844 800 2788 - Fax : (+44) 0844 800 2789 - E-mail : sales@prevost-ltd.co.uk - www.prevost.eu International = PREVOST SAS - - C.S. 90208 - 74942 ANNECY-LE-VIEUX CEDEX - France Tel. : +33 (4)50 64 04 45 - Fax : +33 (0)4 50 64 00 10 - E-mail : sales@prevost.eu- www.prevost.eu

This document is non-contractual. PREVOST reserves the right to modify the features of its range without prior notice.