
SS DOB HIGH BAY
DOB Led High Bay
LD4HB200G
200 W - 26000lm - 4000K



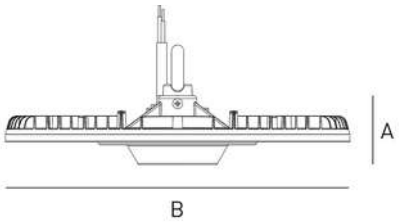

DIMENSIONS	A	B	C
1	83	315	

GENERAL INFORMATIONS	
Code	LD4HB200G
Ean	8031453032203
Family	SS DOB HIGH BAY
Technology	LED
Variant	ANTRACITE
Body material	ALUMINUM
Diffuser / lens material	PC
Operating temperature (° C)	-30 - +40
Years warranty	3
(RAL) Colour	9007
External driver	NO

LIGHTING DATA	
Light colour	CW
CCT (K)	4000
Luminous)ux (lm)	26000
Luminous Flux Module (lm)	26300
Beam (°)	110
Luminous Efflcacy (lm/W)	130

TECHNICAL FEATURES	
Power (W)	200
Supply voltage (V) / Max (V)	220 / 240
Power frequency (Hz)	50/60
Current consumption (mA)	880
Insulation class	1
Power factor	>0,90
Dimmer compatibility	NO
Nominal life (h)	30000

PACKAGING	
Packaging	BOX
Pack	1 / 5
Gross weight (Kg)	6.4
Net weight (Kg)	0.94


Bot Lighting srl con unico socio
Via Lombardia, 37/39 – 30030 Cazzago di Pianiga (VE) Italy - T. +39.041.51.29.411 – F. +39.041.51.01.715
www.botlighting.it – ordini@botlighting.it – info@botlighting.it

NOTE: dati soggetti a modifiche senza preavviso | NOTE: data subject to change without notice

Release 4/11/2024

SS DOB HIGH BAY
DOB Led High Bay
LD4HB200G
200W - 26000lm - 4000K

• Floodlight for industrial applications, ideal for replacing traditional high pressure discharge lamps in large surface environments such as warehouses, industrial sheds.
• White RAL9003 (only on 100W version) or gray RAL9007 aluminium body
• High efficiency up to 130 lm/W
• LED high bay with 'Driver On Board' (DOB) technology
• Overvoltage protection of 4kV line-line
• Overvoltage protection of 6kV line-earth

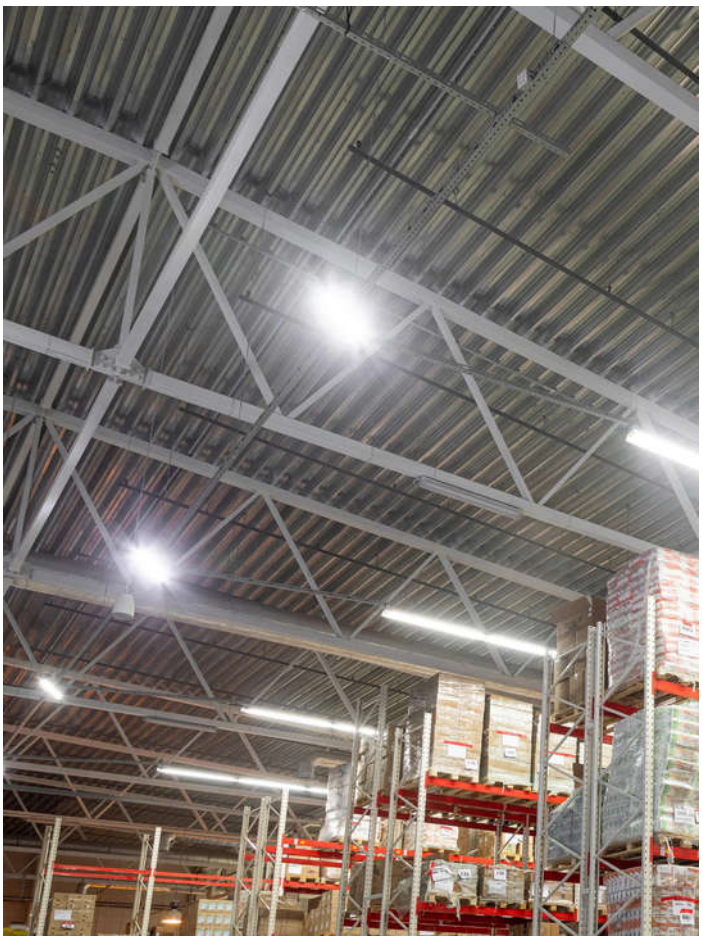

Bot Lighting srl con unico socio
Via Lombardia, 37/39 – 30030 Cazzago di Pianiga (VE) Italy - T. +39.041.51.29.411 – F. +39.041.51.01.715
www.botlighting.it – ordini@botlighting.it – info@botlighting.it
NOTE: dati soggetti a modifiche senza preavviso | NOTE: data subject to change without notice

Release 4/11/2024