Product Description

- Material: 6063-T5
- Surface treatment: Anode Oxidation (Natural color)
- Suitable for KSI and KSIM series panel mounted SSR
- Available with 35mm Din-rail or screw installation



Ordering Information


KHS	-B	70	D
KHS Series	Series B: B Series	Length 70: 70mm 90: 90mm	Accessory D: Din-rail

General Specifications


Series	B Series		
Part Number	KHS-B70	KHS-B70-D	KHS-B90-D
Photo			
Material	6063-T5	6063-T5	6063-T5
Thermal Resistance	1.9℃/W	1.9℃/W	1.7℃/W
Net Weight(Typical)	273g	329g	420g
Outer Dimension	50mm×69mm×70mm	50mm×83mm×81mm	50mm×78mm×122mm
Installation mode	Screw	35mm Din-rail	35mm Din-rail
Suitable for	SSR with mounting hole spacing of 31mm or 47.5mm, such as KSIM, KSI series	SSR with mounting hole spacing of 31mm or 47.5mm, such as KSIM, KSI series	SSR with mounting hole spacing of 47.5mm or 40mm×70mm, such as KSI or KMTYM series

 Copyright © 2022 Xiamen Kudom Electronics Technology Co.,Ltd.


Outline Dimensions

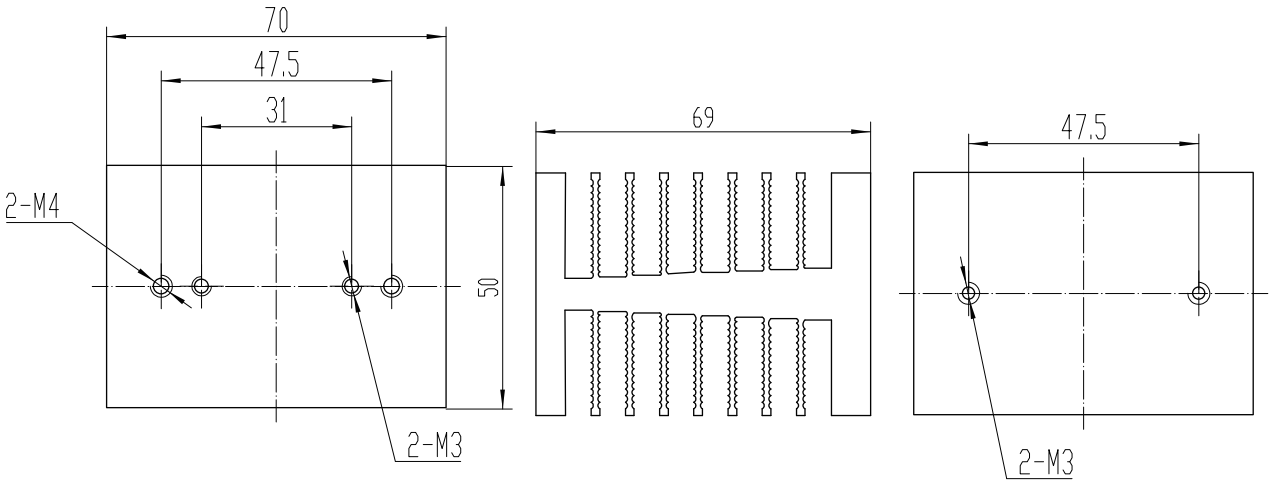

KHS-B70

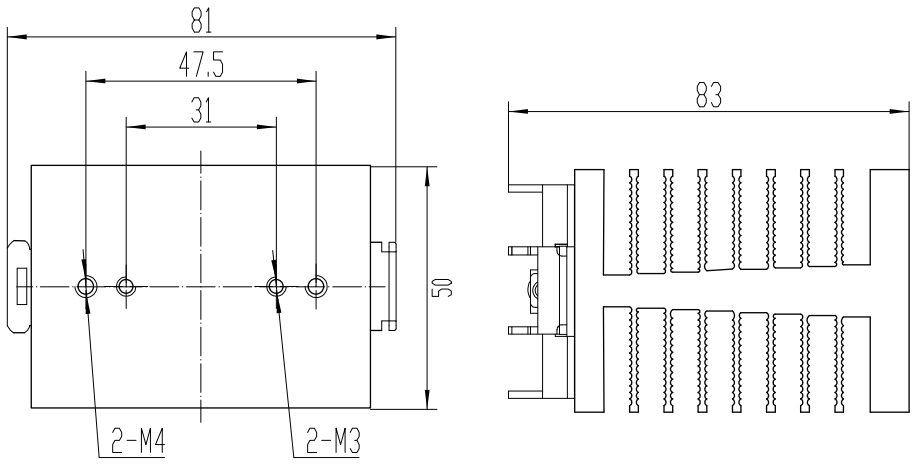

KHS-B70-D

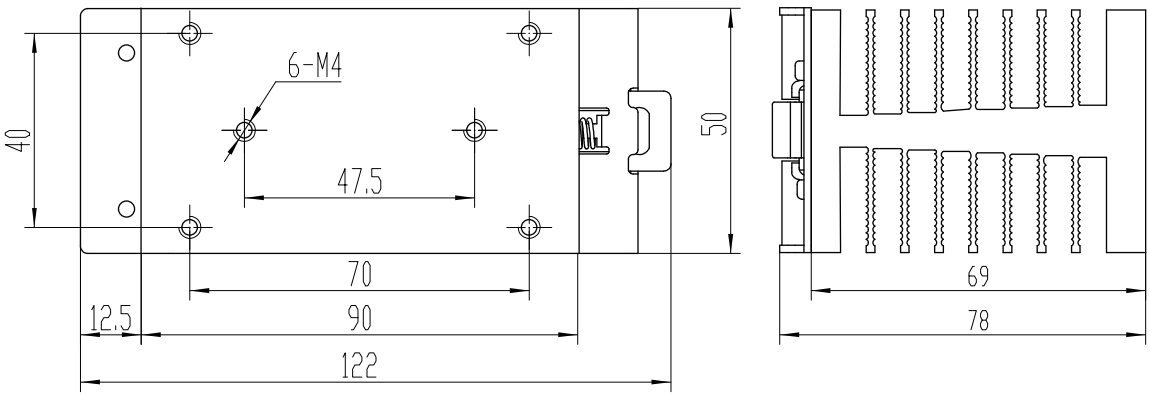

KHS-B90-D