

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE PER BRIAN GATES	03/30/2017	JLABOY
B	ECN 8743: CHANGE PACKAGING SPEC FROM PKG-00012 TO PS-0031.	05/01/2017	JLABOY
C	ECN 9053: CREATE 3D MODEL, REVISE DRAWING TO L-COM STANDARDS	01/18/2018	DFRISIELLO
D	ECN 9537: P1 WIRE MAP PIN 6 TO 16, P2 DESCRIPTION TO 24, REMOVE ROHS	11/26/2018	DFRISIELLO

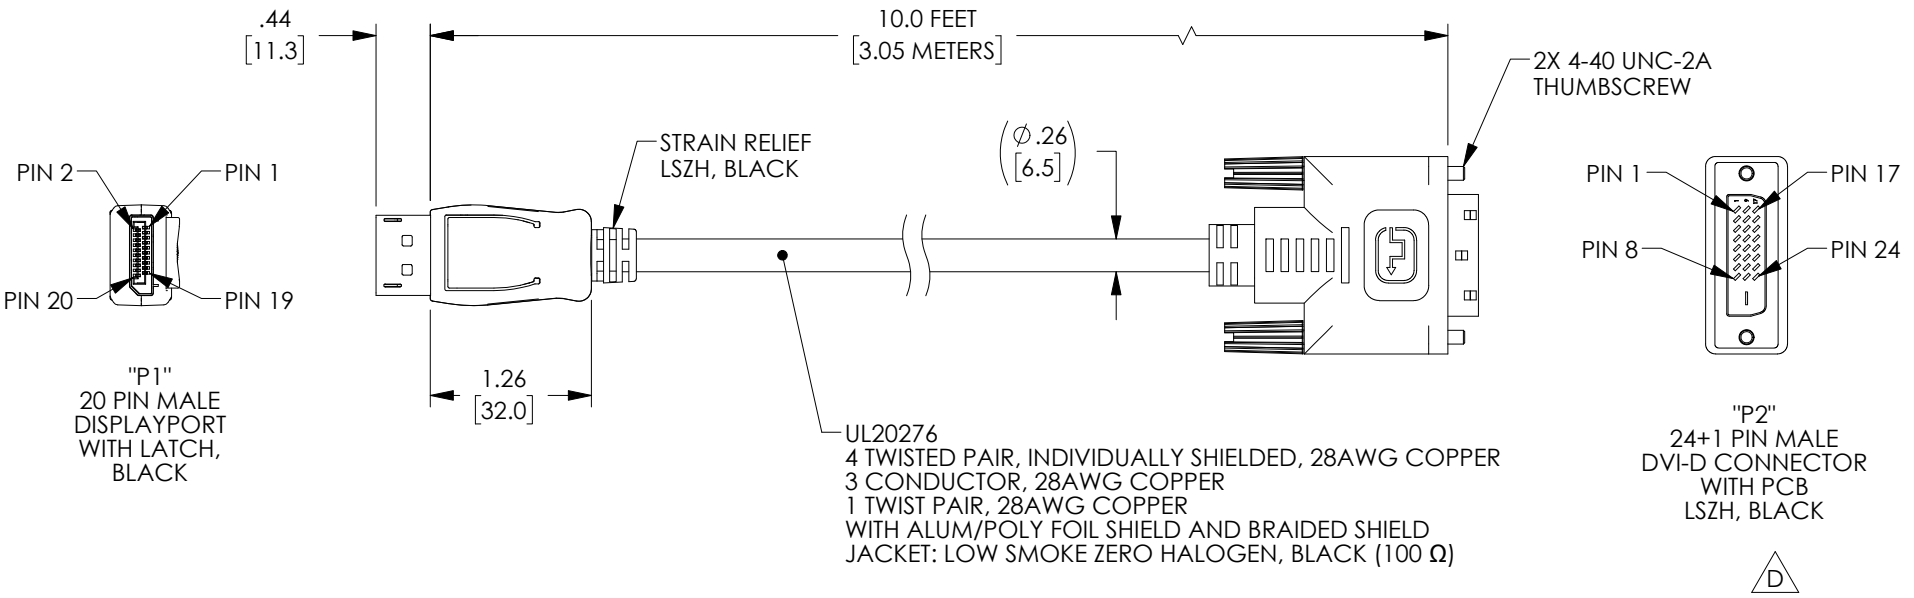

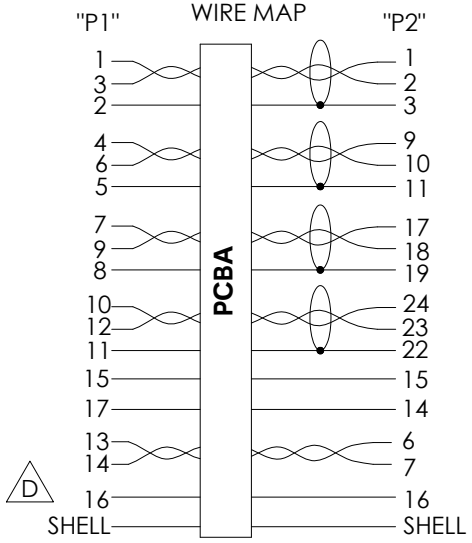

NOTES:

ELECTRICAL PROPERTIES:
VOLTAGE TEST: DC 300V
INSULATION RESISTANCE: 10.0M OHM MIN
CONDUCTIVE RESISTANCE: 2.0 OHM MAX

MISCELLANEOUS:
INSIDE MOLDED P2 END MUST USE COPPER FOIL AND SOLDER BRAID 360 DEGREE TO THE SHELL
CABLE ASSEMBLY SHALL BE UL CERTIFIED
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

D

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS		DATE
DRAWN BY	BPUCHASKI	03/27/2017
CHECKED BY	JLABOY	03/27/2017
APPROVED BY	BGATES	03/27/2017

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
AUDIO/VIDEO

PRODUCT DESCRIPTION
CA DVI TO DP LSZH 10 FEET

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CTLDVI-DLSP-MM-10	D

SCALE: NONE | CAD FILE: CTLDVI-DLSP-MM-10.SLDDRW | SHEET 1 OF 1