HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

Crocodile clips

MA 1



CE

Product	MA 1
description	Miniature alligator clip with high strength insulation and nickel-plated brass/bronze jaws. The part of the jaws (fine wire section) allows a secure contect to be made when clamping even the thinner wire. Capable of clamping flat components (soldering eyes) and wire up to a maximum diameter of 4mm.
article-no. / *colour	9303178xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 06 gray · 07 white Ni
drawing	
	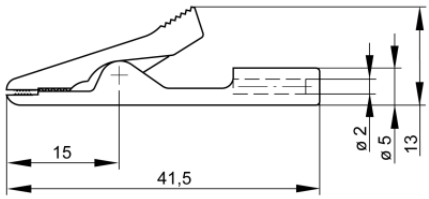
technical data	
connection	2 mm socket
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	8 A
material socket	bronze, nickel plated
housing material	PP
temperature range acc. To IEC61010(2)	-25 °C to +100 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamping range	4 mm
standard	IEC 61010

2 mm system

[1] for normal environmental conditions -5°C to +40°C
[2] contact the manufacturer for applications at deviating temperature ranges
[3] Other circuits that are not directly connected to mains
stand: 09.07.2018