


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/1/10	D.GRIFFIN
B	ECN 4905: CLARIFY PIN 1 AND ADDDIELECTRIC CALL OUT	7/14/10	D.FRISIELLO
C	ECN 7063: REMOVED 3.0 REQUIREMENTS NOTE. UPDATED FORMAT AND ROHS.	9/16/13	D. DESJARDIN

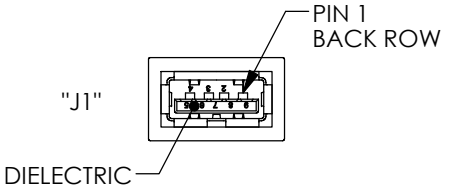

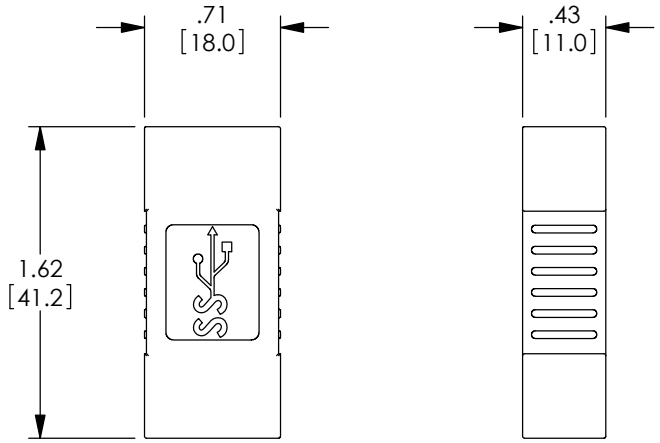

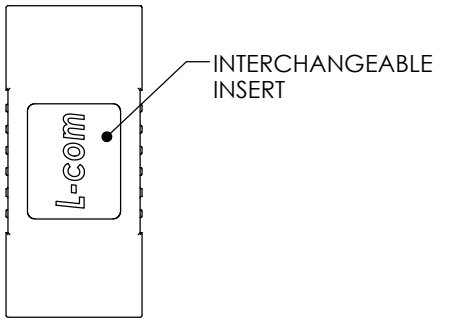

WIRING MAP	
"J1"	"J2"
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

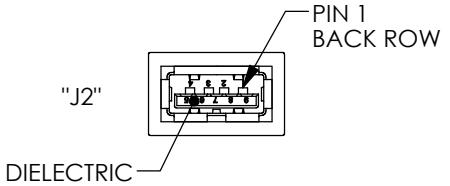

NOTES:

MATERIAL:
HOUSING: PVC, BLUE (PANTONE 300C)
INSULATOR: LCP (BLUE)
CONTACTS: BRASS

FINISH:
CONTACTS: GOLD PLATING OVER NICKEL PLATE
SHELL: NICKEL SILVER PLATING

C MISCELLANEOUS:
ALL DIMENSIONS ARE FOR REFERENCE ONLY.
COMPONENT SHALL BE TESTED FOR CONTINUITY.
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

C **REGULATORY COMPLIANCE:**
ROHS, CE

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	3/25/10
CHECKED BY M.MARTINEZ	3/25/10
APPROVED BY S.SMITH	3/25/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: ADPTR USB 3.0 TYPE A F/F

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	UAD036FF	C

SCALE: NONE | CAD FILE: UAD036FF.SLDDRW | SHEET 1 OF 1