Datenblatt - Fiche technique - Data sheet

21.15.2564

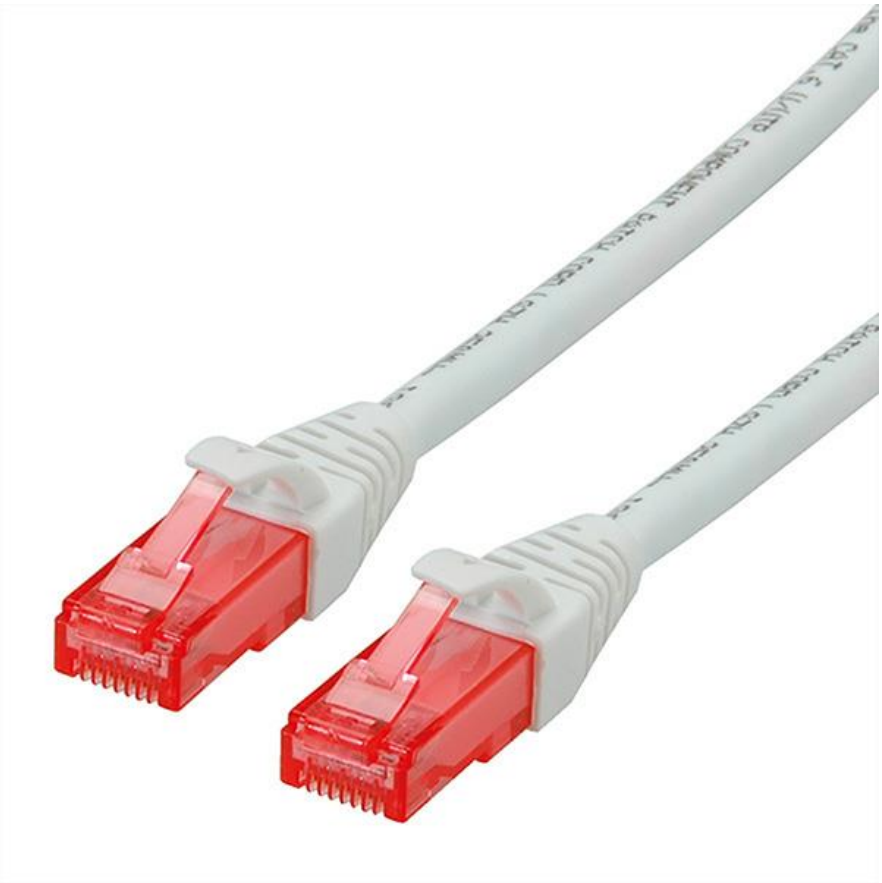

ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, weiss, 1,5 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, blanc, 1,5 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, white, 1.5 m

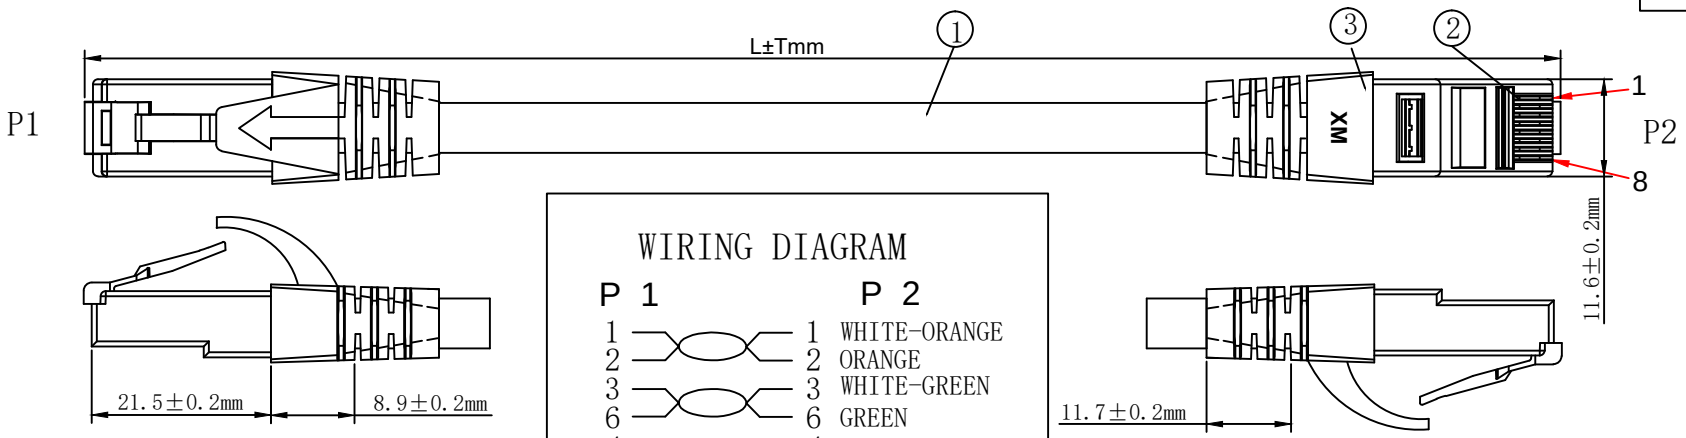

WIRING DIAGRAM

P 1		P 2	
1		1	WHITE-ORANGE
2		2	ORANGE
3		3	WHITE-GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE-BLUE
7		7	WHITE-BROWN
8		8	BROWN

1. ELECTRICAL TEST:
   (1). 100% OPEN SHORT & MISS WIRE TEST;
   (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
   (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:50mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC White	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

COLOUR:White

ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2946	300mm	±10mm
21.15.2560	500mm	±15mm
21.15.2561	1000mm	±30mm
21.15.2564	1500mm	±45mm
21.15.2562	2000mm	±60mm
21.15.2563	3000mm	±90mm
21.15.2565	5000mm	±150mm
21.15.2566	7500mm	±210mm
21.15.2567	10000mm	±300mm
21.15.2568	15000mm	±450mm
21.15.2569	20000mm	±600mm

ITEM NO.	21.15.2946	21.15.2560	21.15.2561	21.15.2562	21.15.2563
21.15.2564	21.15.2565	21.15.2566	21.15.2567	21.15.2568	21.15.2569
DESC.	ROLINE UTP PatchCord CAT.6, LSOH, Comp.Level, White				

SECOMP