SINGLE WINDOW SIGHT GLASS
SW12

DESCRIPTION

For monitoring the right operation of a steam trap to avoid leakage of live steam and consequently big energy losses, a sight glass is recommended to be installed downstream of the steam trap.

Single window SW sight glass, has been designed for this particular application.


Connections are female screwed.




USE:	Condensate pipes downstream steam traps.
AVAILABLE MODELS:	SW 12 - 5 mm thick glass
SIZES:	DN ½", 3/4" and DN 1"
CONNECTIONS:	Female screwed ISO 7/1Rp(BS21).
INSTALLATION:	Horizontal or vertical installation. See IMI, installation and maintenance instructions.

PMO – Max. operating pressure	12 bar
TMO – Max. operating temperature	150 ºC

How to order: i.e. SW12 DN ½" BSP.

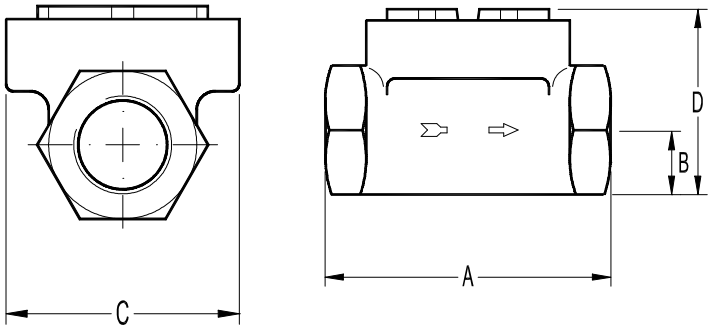

DIMENSIONS (mm)					
SIZE DN	***A***	***B***	***C***	***D***	***WGT. Kgs***
1/2"	80	16	62	52	0,6
3/4"	88	19	62	57	0,9
1"	88	23	62	60	0,85

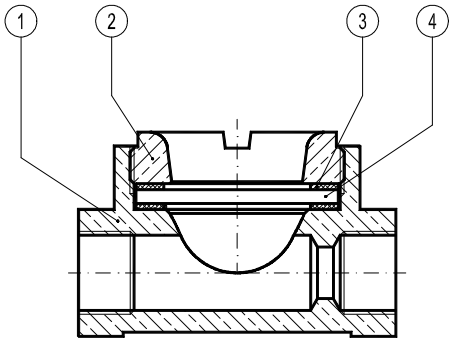

MATERIALS		
POS.Nr.	***DESIGNATION***	***MATERIAL***
1	Body	Brass EN12165 / CuZn39Pb2
2	Glass nut	Brass EN12165 / CuZn39Pb2
3	* Gasket	St.Steel / Graphite
4	* Window glass	Borosilicate

*Available spare parts.

We reserve the right to change the design and material of this product without notice.