Caps to Holder FEC



500 VAC · 4 W / 10 A (VDE) · 600 VAC/DC · 20 A (UL/CSA)

Standards
- IEC 60127-6
- UL 4248-1
- CSA C22.2 no. 4248.1

Approvals
- VDE Certificate Number: 137910 UG
- UL File Number: E39328

References
Mating Cap to FEC

Weblinks
pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product


Technical Data


Fuse-Link	5 x 20 or 6.3 x 32 mm
Rated Voltage	500 VAC (VDE), 600 VAC/DC (UL/CSA)
Rated current	10 A (VDE), 20 A (UL/CSA)
Rated Power Acceptance IEC	4 W / 10 A @ Ta 23 °C
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Cap	Thermoset
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Contact Resistance	< mΩ at 20 mV

Dimension

34.5 mm

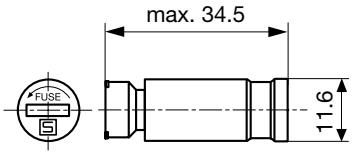

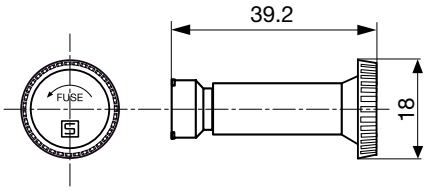

All Variants

Cap	Fuse-Link	Degree of Protection	Order Number	
slotted	5 x 20mm	IP 40	0031.1611	■
slotted	6.3 x 32mm	IP 40	0031.1613	■
Fingergrip	6.3 x 32mm	IP 40	0031.1616	■

■ Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging Unit

Plastic Bag (100 pcs.)

05.07.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.