
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/22/10	D.GRIFFIN
B	ECN 8327 CHANGE NMO THREAD CALL OUT	05/11/16	B.PUCHASKI

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CENTER PIN	BRASS	GOLD
INSULATOR	TEFLON	-
LOCK WASHER	BRASS	NICKEL
FLAT WASHER	BRASS	NICKEL
NUT	BRASS	NICKEL
O-RING	RUBBER	-

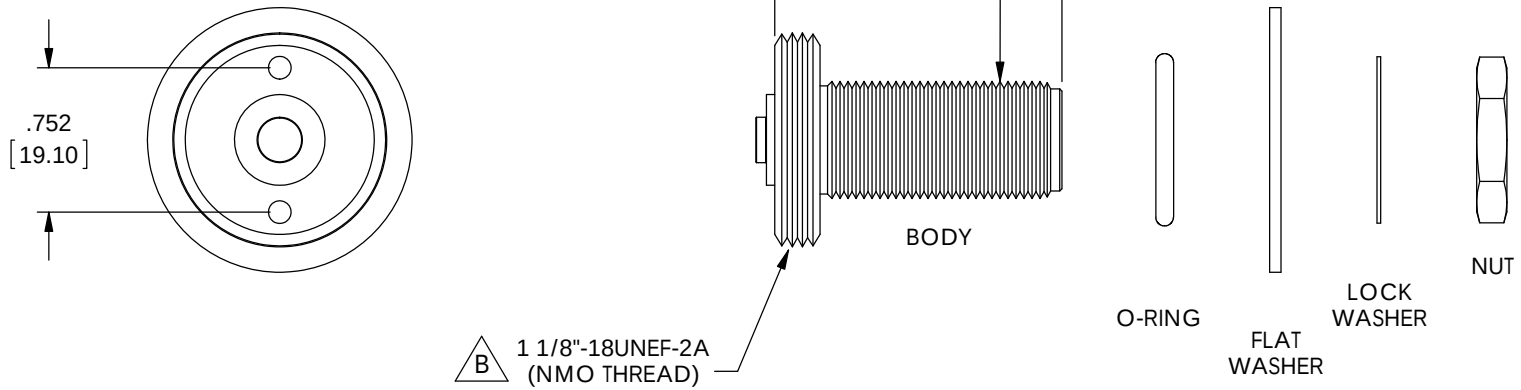

NOTES:

ELECTRICAL:
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC ~ 11 GHz
VOLTAGE RATING: 1500 VOLTS PEAK
WITHSTAND VOLTAGE: 2500V RMS.
INSERTION LOSS: .15 dB MAX.

MISCELLANEOUS:
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
DIMENSIONAL TOLERANCES:
.X = ±.1 [2.54]
.XX = ±.01 [.25]
.XXX = ±.005 [.13]
ANGULAR TOLERANCES:
ALL = ± 1°
PROJECTION

APPROVALS	DATE
DRAWN BY D. CASTRO	4/20/10
CHECKED BY K. BURGNER	4/21/10
APPROVED BY K. BURGNER	4/21/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
ADP,NMO/TAD TO N-FEMALE

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	AXA-AMNFB	B

SCALE: NONE | CAD FILE: AXA-AMNFB.SLDDRW | SHEET 1 OF 1