
## (RTR) Bayonet Type with fittingnut

**RTR-M06-L050-K01.1 Si+Si**




| | | |
|---|---|---|
| Max. operating temperature | : | -50 °C / +200 °C |
| Standard cable types | : | Silicone + Silicone |
| Sensor type | : | DIN/EN60751 Class “B’’ 1xPT-100 |
| Protection tube material | : | AIS304 (DIN1.4301) Stainless Steel |
| Fittignut | : | Standard 1/2’’ |

## Technical drawing

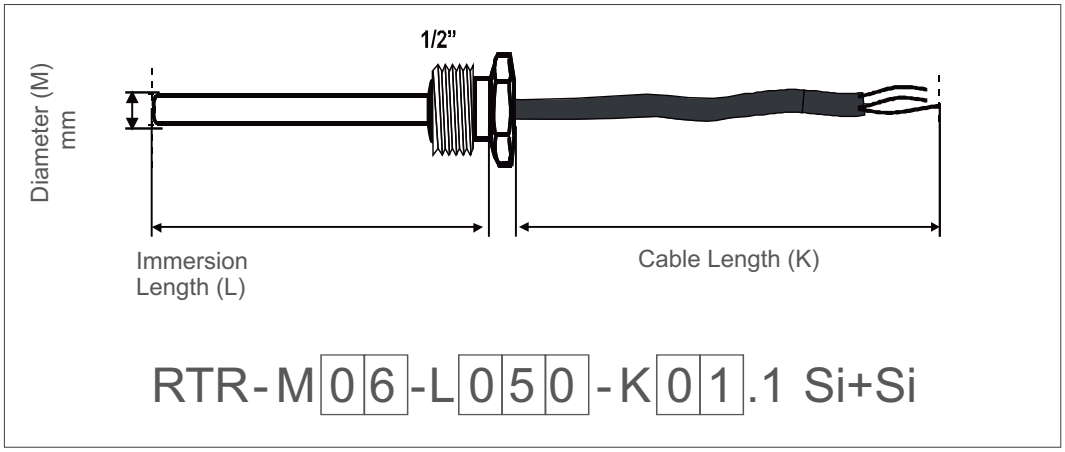


PT-100 Connections




| | | |
|---|---|---|
| Diameter (M) | : | 6 mm |
| Immersion Length (L) | : | 50 mm |
| Cable lenght (K) | : | 1 meter |