Osisense™ XG

Radio Frequency Identification System

Catalog
June 2011



Schneider Electric

Contents

OsiSense™ XG
Radio Frequency Identification System
13.56 MHz

Selection guide ***4***

- Introduction, Description *7*
- Specifications. *13*
- Catalog Numbers. *16*
- Dimensions *20*
- Connections. *23*
- Operating Curves. *24*
- Installation Information. *26*

OsiSense® XG
Radio Frequency Identification System
13.56 MHz

Applications	**Numerous and varying applications in the industrial, logistic and building sectors: flexible production workshops, traceability, access control, etc.**	
Compact stations, 13.56 MHz	**Flat form 40**	**Flat form 80**
		
Dimensions, W x H x D (mm)	40 x 40 x 15	80 x 80 x 26
Protocols	Modbus™ RTU and Uni-Telway™	
Nominal sensing distance depending on associated tag, mm (in.)	18 to 70 (0.71 to 2.76)	20 to 100 (0.79 to 3.94)
Station type	**XGCS4901201**	**XGCS8901201**
Page	10/17	

Electronic tags	**Flat form 40**					**ISO badge** *(1)*	**Disc**		**Flat form 26**	**Cylindrical**		**New**
												
Dimensions, W x H x D (mm)	40 x 40 x 15					54 x 85.5 x 0.8	Ø 30 x 3		Ø 30 x 3	26 x 26 x 13	M18 x 1 x 12	40 x 11
Type of memory	EEPROM		FeRAM			EEPROM			FeRAM	EEPROM		
Memory capacity (bytes)	3,408	13,632	2,048	8,192	32,768	256	112		2,048	256		
Nominal sensing distance, mm (in.) *(3)* **With station XGCS49●**	33 (1.30)	30 (1.18)	45 (1.77)	25 (0.98)	25 (0.98)	70 (2.76)	48 (1.89)		45 (1.77)	40 (1.57)	18 (0.71)	30–39 (1.18–1.54 in.)
With station XGCS89●	48 (1.89)	40 (1.57)	65 (2.56)	39 (1.54)	39 (1.54)	100 (3.94)	65 (2.56)		65 (2.56)	55 (2.17)	20 (0.79)	35–46 (1.38–1.81 in.)
Time (ms) *(4)* **Read** *(2)*	9.25 + 0.375 x n	16.25 + 0.375 x n	2 x n	6 + 0.25 x n	6 + 0.25 x n	12 + 0.825 x n			2 x n	12 + 0.825 x n		12 + 0.825 x n
Write *(2)*	13 + 0.8 x n	20 + 0.8 x n	2.4 x n	6 + 0.25 x n	6 + 0.25 x n	20 + 11.8 x n	12 + 5.6 x n		2.4 x n	20 + 11.8 x n	19 + 4.1 x n	20 + 11.8 x n
Tag type	**XGH B444345**	**XGH B445345**	**XGH B440245**	**XGH B440845**	**XGH B443245**	**XGH B90E340**	**XGH B320345**		**XGH B320246**	**XGH B221346**	**XGH B211345**	**XGH B411346**
Page	16											

(1) Customized versions on request.
(2) n = number of 16-bit words.
(3) Metal mounted: See the sensing distances under "Minimum permissible mounting distances in a metal structure" on page 10/22.
(4) Does not include the network transfer time.

OsiSense® XG
Radio Frequency Identification System 13.56 MHz

Connection boxes	Ethernet box	Tap-off box	Profibus™ box	Ethernet IP splitter box
				
Protocols	Modbus TCP/IP	Modbus and Uni-Telway	Profibus-DP	Ethernet/IP
Associated compact stations	XGCS49● and XGCS89●			
Supply voltage	⎓ 24 Vdc			
Connection box type	**XGSZ33ETH**	**TCSAMT31FP**	**XGSZ33PDP**	**XGSZ33EIP**
Page	6			

Field expanders	Conveying type	Universal type
		
Dimensions, W x H x D (mm)	400 x 23 x 50	250 x 250 x 10
Dialogue area, W x H (mm)	380 x 45	230 x 230
Associated compact stations	XGCS4901201	
Nominal sensing distance depending on associated tag (mm)	30 to 90	26 to 150
Field expander type	**XGFEC540**	**XGFEC2525**
Page	7	

Portable terminal	For 13.56 MHz RFID diagnostics
	
Function	Read/Write operations on electronic tags and diagnostics on compact stations
Operating system	Microsoft Windows CE.NET Professional version 4.2
Terminal type	**XGSTP401**
Page	10/13

OsiSense XG accessories	Cables, adaptors, mounting plates, etc.
Pages	10/14 to 10/16

OsiSense® XG
Radio Frequency Identification System 13.56 MHz

Operating principle

RFID is a term used for radio frequency identification systems. The frequencies range between 50 kHz and 2.5 GHz. The most widely used is 13.56 MHz.

The OsiSense XG radio frequency identification system allows object traceability, object tracking, and access control functions to be performed.
Information is stored in an accessible memory bank using a simple radio frequency link. This memory bank is in the form of an electronic tag, which contains an antenna and an integrated circuit.
The tag contains the information associated with the object to which the tag is attached. When a tag passes through the field generated by the smart antenna, it detects the signal and exchanges the read or write data between its memory and the smart antenna.
The applications are numerous and include the following:
- Logistics: dispatch, receipt, transit
- Tracking and sorting of baggage
- Automatic tolls
- Access control

The OsiSense XG radio frequency identification system is also suited to difficult environments (humidity, temperature, mechanical shock, vibration, dust, etc.).

OsiSense XG Radio Frequency Identification System

The OsiSense XG radio frequency identification system is open to the majority of ISO 18000-3, ISO 15693 and ISO 14443 electronic tags.
The XG RFID sysetem integrates Modbus RTU, Uni-Telway, Modbus TCP/IP, and Profibus-DP, and Ethernet/IP protocols.
The OsiSense XG RFID system offer includes:
- Two models of 13.56 MHz compact smart antenna (read/write)
- Eleven models of 13.56 MHz electronic tags
- One portable RFID diagnostics terminal
- Four models of network connection boxes
- Two models of patented field expanders (accessories that allow you to adapt the shape of the dialog zone between the tag and the compact smart antenna)
- Connection and mounting accessories



Compact smart antenna, Flat form 40

Setup

XG RFID compact smart antennas are simple to set up, thanks to the following features:
- Integrated RFID and network functions
- No programming
- Automatic detection of the RFID electronic tags (read or write)
- Automatic setting of the communication parameters (speed, format, parity, protocol, etc.)
- Configuration of the network address (1 to 15) using the badge included with the smart antenna
- Read/write compatibility with the majority of 13.56 MHz tags on the market
- Low sensitivity to metal environments

Installation

The XG RFID smart antennas are compact and robust. They can easily be integrated into flexible manufacturing production lines in the following ways:
- quick connection using the M12 connector
- clip-on mounting

An extensive range of connecting cables and connection boxes allow the OsiSense XG smart antennas to be easily connected to industrial communication networks.



Compact smart antenna, Flat form 80

Description

XG RFID 13.56 MHz compact smart antennas *(1)*


XGCS smart antennas allow the reading and writing of 13.56 MHz RFID tags that comply to standards ISO 15693, ISO 14443 A and B, and ISO 18000-3.
2 models of XG RFID compact smart antennas are available:
- Format C compact smart antenna: XGCS490●●●●:
  - Dimensions (mm): 40 x 40 x 15
  - Nominal sensing distance: 18–70 mm (0.71–2.76 in.), depending on the associated tag
- Format D compact smart antenna: XGCS890●●●●:
  - Dimensions (mm): 80 x 80 x 26
  - Nominal sensing distance: 20–100 mm (0.79–3.94 in.), depending on the associated tag

(1) For smart antenna and tag selection according to passing speeds, see page 16.

OsiSense® XG
Radio Frequency Identification System 13.56 MHz



Electronic tags

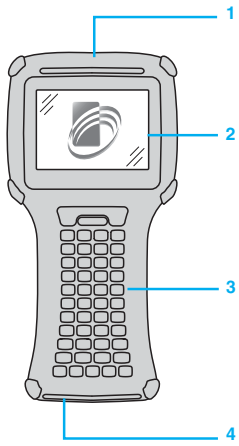

Portable diagnostics terminal



Field expanders

XG RFID 13.56 MHz compact smart antennas *(continued)*

■ **Functions integrated into compact smart antennas:** XG RFID compact smart antennas integrate functions that simplify communication among the tags, the smart antennas, and the controller (PLC, PC, etc.). These built-in functions are activated by standard reading/writing of word requests sent by the PLC:
□ **Firmware version:** the smart antenna is interrogated to read its version
□ **Reset:** the smart antenna is reinitialized and assumes its factory default configuration (network address at 1, transmission speed at 19,200 Bd, parameters deleted)
□ **Init:** the smart antenna is reinitialized and operates as if reconnected to the supply (address unchanged, transmission speed unchanged, parameters deleted)
□ **Sleep mode:** the transmission of the electromagnetic field of the smart antenna is only activated on its receipt of a read or write instruction. This mode reduces the power consumption of the smart antenna and enables the suppression of interference when the smart antennas are close to each other
□ **Auto Read/Write:** This mode enables the smart antenna to automatically execute up to 10 read or write instructions (up to 128 write words and up to 126 read words) in a tag as soon as it enters the dialog zone

XG RFID electronic tags *(1)*

XGHB electronic tags offer the following advantages:
■ fast access to the data
■ wide range of memory capacities
■ security of access to the contents
■ operation without battery
■ positioning flexibility
■ protection suited to the environmental conditions
The nominal transmission distance is 18–100 mm (0.70–3.93 in.) depending on the model of the tag and the associated compact smart antenna.


Portable 13.56 MHz RFID diagnostics terminal

The portable terminal **XGSTP401** is designed for use in industrial applications. Its rugged structure combined with its numerous functions make it suitable for applications in difficult environments. It operates on Microsoft® Windows® CE.NET Professional version 4.2 operating system. The 13.56 MHz RFID function and OsiSense XG RFID system software installed on the portable terminal allow maintenance operations to be performed on the electronic tags and compact smart antennas.
Transfer of data to a PC is made via an RS-232 communication port.
The portable terminal **XGSTP401** comprises a:
1 CF (Compact Flash) format expansion connector
2 Color touchscreen
3 Keypad (45 keys)
4 RS-232 port
The following accessories are included with the terminal:
- PC connecting cable
- OsiSense XG RFID system software (installed)
- battery, universal battery charger, 3 styluses, protective cover
- user guide


Field expander

Field expanders are accessories designed to operate with the XG RFID smart antennas. They allow you to adapt the shape of the dialog field of XGCS4901201 smart antennas to conveying/handling applications. The concept is a connection-free induction link between the smart antenna and the field expander. Two standard models are available:
■ The conveyor model **XGFEC540** detects ISO 15693 tags on a narrow strip covering the width of the conveyor (mounted between two rollers of the conveyor)
□ Dimensions (mm): 400 x 23 x 50
□ Nominal sensing distance: 30–90 mm (1.18–3.54 in.) depending on the associated tag
■ The universal model **XGFEC2525** increases the detection area and distance of ISO 15693 tags, which also permits higher passing speeds of the tags
□ Dimensions: 250 x 250 x 10
□ Nominal sensing distance: 26–150 mm (1.02–5.90 in.) depending on the associated tag
■ Read/write compatibility with the majority of the 13.56 MHz/ISO 15693 tags on the market
(NOTE: These accessories are not compatible with ISO 14443 tags)


(1) For smart antenna and tag selection according to passing speeds, see page 16.

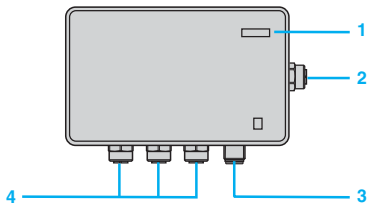


XGSZ33ETH Ethernet box

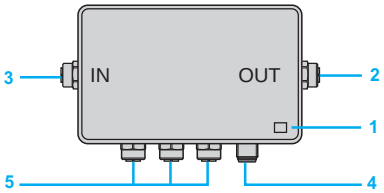

TCSAMT31FP tap-off box

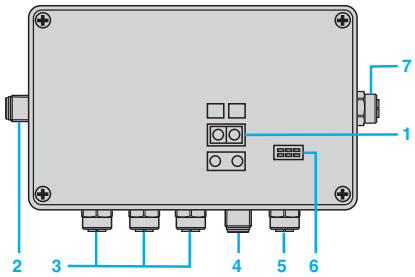

XGSZ33PDP Profibus box

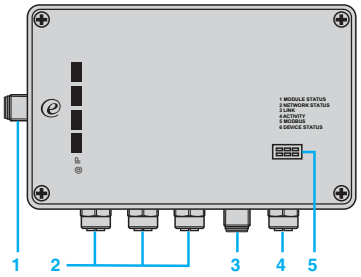

XGSZ33EIP Ethernet/IP box

XG RFID connection boxes

Three types of quick connection boxes are available:
- Ethernet box **XGSZ33ETH** for an Ethernet Modbus TCP/IP network
- Tap-off box **TCSAMT31FP** for a Modbus or Uni-Telway communication bus
- Profibus box **XGSZ33PDP** for a Profibus-DP network
- Ethernet/IP box **XGSZ33EIP** for an Ethernet/IP network

Ethernet box XGSZ33ETH

The XG RFID Ethernet box **XGSZ33ETH** allows you to connect XGCS smart antennas to an Ethernet network (Modbus TCP/IP protocol).

It provides PLC or PC access to the following functions of XGCS smart antennas:
- reading/writing of tags
- control and checking
- monitoring
- diagnostics

The **XGSZ33ETH** Ethernet box is fitted with M12 connectors. It is used to connect the power supply, the Ethernet network, and 1–3 XGCS smart antennas.

It comprises a sealed metal enclosure fitted with the following:
1 Power On and Ethernet signaling LEDs
2 One Ethernet socket, M12 type, D coding
3 One power supply socket, M12 type, 4-pin male
4 3 sockets, M12 type female, A coding, for connecting 1–3 XGCS smart antennas.

Tap-off box TCSAMT31FP

The XG RFID tap-off box **TCSAMT31FP** allows you to connect XGCS smart antennas to a Modbus or Uni-Telway communication bus.

The **TCSAMT31FP** tap-off box is fitted with M12 connectors. It is used to connect the supply, the Modbus communication bus, and 1–3 XGCS smart antennas.

It comprises a sealed metal enclosure fitted with the following:
1 One green LED indicator: Power On
2 One network output socket, M12 type 5-pin female, A coding
3 One network input socket, M12 type 5-pin male, A coding
4 One power supply socket, M12 type 4-pin male, A coding
5 3 sockets, M12 type female, A coding, for connecting 1–3 compact XGCS smart antennas

Profibus box XGSZ33PDP

The XG RFID Profibus box **XGSZ33PDP** allows you to connect XGCS smart antennas to a Profibus-DP network.

It provides PLC or PC access to the functions of XGCS smart antennas:
- reading/writing of tags
- control and checking
- monitoring
- diagnostics

The **XGSZ33PDP** Profibus box is fitted with M12 connectors. It is used to connect the power supply, the Profibus-DP network, and 1–3 XGCS smart antennas.

It comprises a sealed metal enclosure fitted with the following:
1 Two coding wheels for configuration of the network address
2 One Profibus network input socket, M12 type 5-pin male, B coding
3 3 sockets, M12 type female, A coding, for connecting 1–3 XGCS smart antennas
4 One power supply socket, M12 type 4-pin male, A coding
5 One configuration port (M12 type female, A coding)
6 Profibus network, Modbus network, and connection box status signaling LEDs
7 One Profibus network output socket, M12 type 5-pin female, B coding.

Ethernet/IP box XGSZ33EIP


The XG RFID Ethernet/IP box **XGSZ33EIP** allows you to connect XGCS smart antennas to am Ethernet/IP network.

It allows connection of a group of XG RFID smart antennas as a node on an Ethernet/IP local area network (LAN)
- reading/writing of tags
- control and checking
- monitoring
- diagnostics

The **XGSZ33EIP** Ethernet/IP box is fitted with M12 connectors. It is used to connect the power supply, the Profibus-DP network, and 1–3 XGCS smart antennas.

It comprises a sealed metal enclosure fitted with the following:
1 Ethernet connector (M12 4-pins female, D-coding)
2 Three OsiSense XG compact smart antennaconnector (M12 5-pins female, A-coding)
3 Power supply connector (M12 4-pins male A-coding)
4 Configuration port (M12 female, A-coding) (For Schneider Electric use only)
5 Signaling LEDS for the Ethernet fieldbus, Modbus and splitter box status

Mounting example for Modbus™ network

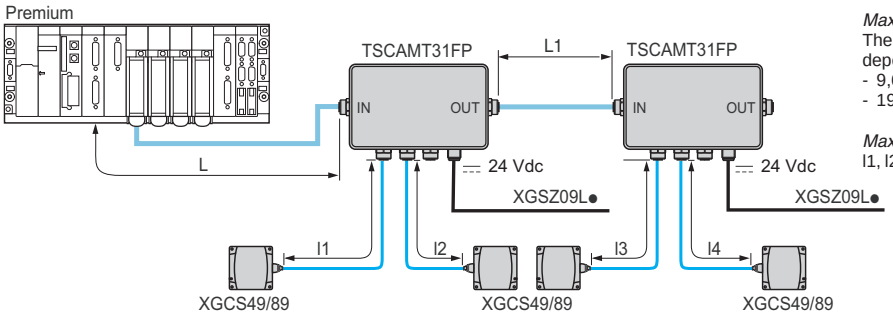


Maximum length of bus
The maximum length of the bus (L + L1 + l4) depends on the speed of the network:
- 9,600 bd: 1000 m
- 19,200 bd: 500 m


Maximum length of tap-offs:
l1, l2, and l3: 10 m.

Example of connection to a Schneider Electric PLC


Direct connection

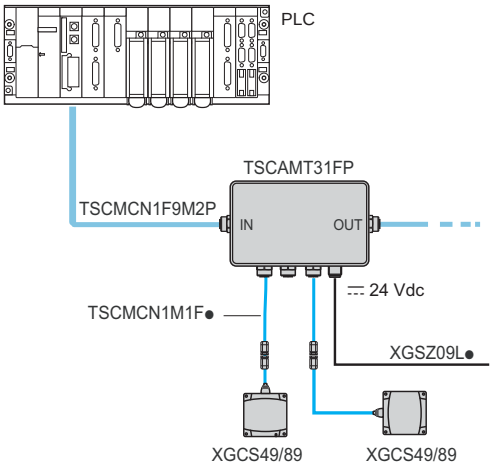

Connection via a TSXSCA62

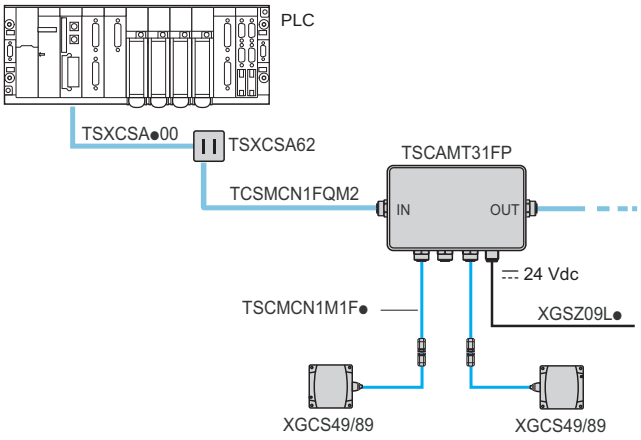


Example of a connection on an Ethernet Modbus™ TCP/IP network

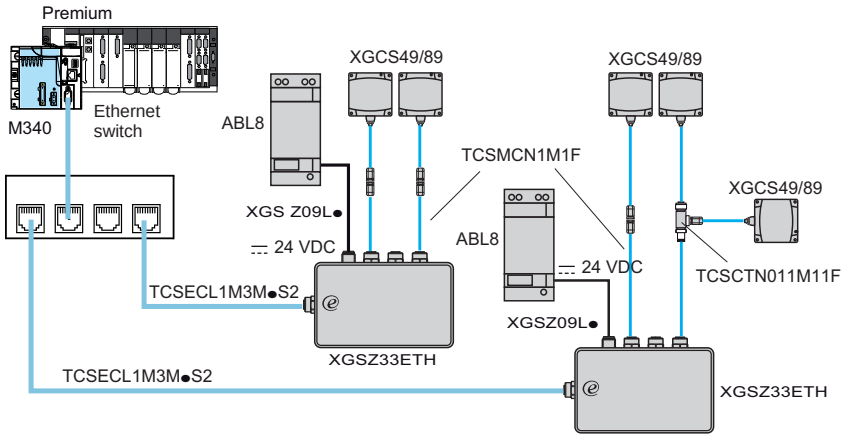


The number of smart antennas connected to each box can be increased by using the M12 T-connector (catalog number TCSCTN011M11F). To maintain high-performance operation, we recommend that a maximum of 8 compact smart antennas be connected (the Ethernet box has eight communication ports and sockets that can be simultaneously open on TCP/IP). In cases where the I/O scanning function is used (which requires an additional communication port), do not connect more than seven smart antennas.
The total length of the smart antenna side network for XGCS smart antennas (XGCS49 and XGCS89) is limited to 160 m.

Example of a mixed IP 20 and IP 67 connection on an Ethernet Modbus™ TCP/IP network

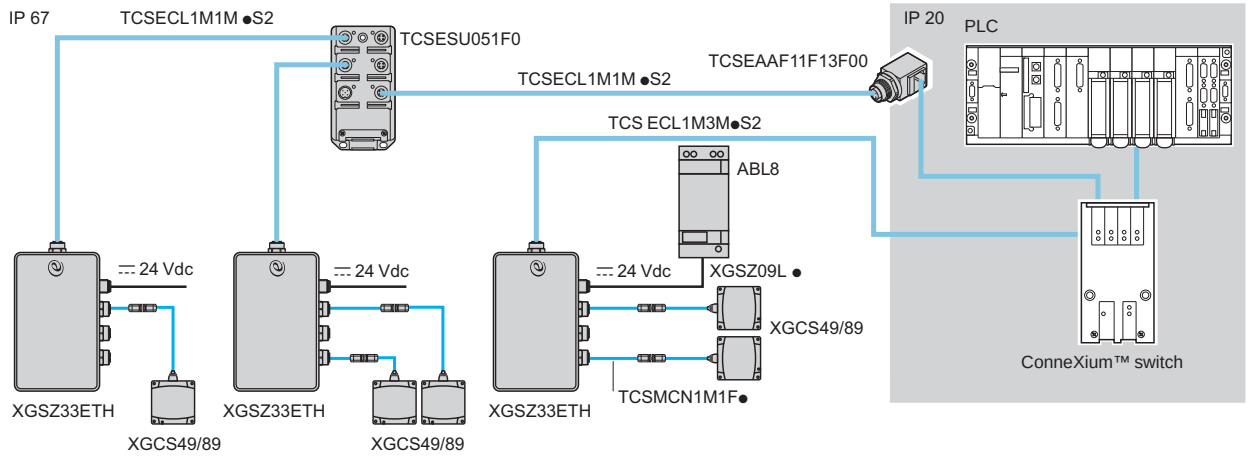

Example of a connection to a Magelis™ terminal

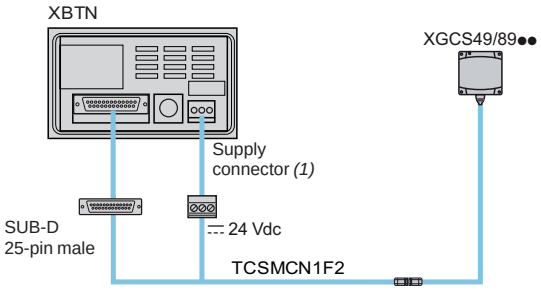


Cable TCSMCN1F2 connections

Scheme	Contact	Signal	Wire color
	1	Drain (Modbus-SHLD)	–
	2	⎓ 24 Vdc	Red
	3	0 V Modbus-GND	Black
	4	D0	White
	5	D1	Blue

1) Magelis™ terminal supply connector (included with the Magelis terminal).


Example of a connection on an Ethernet/IP network

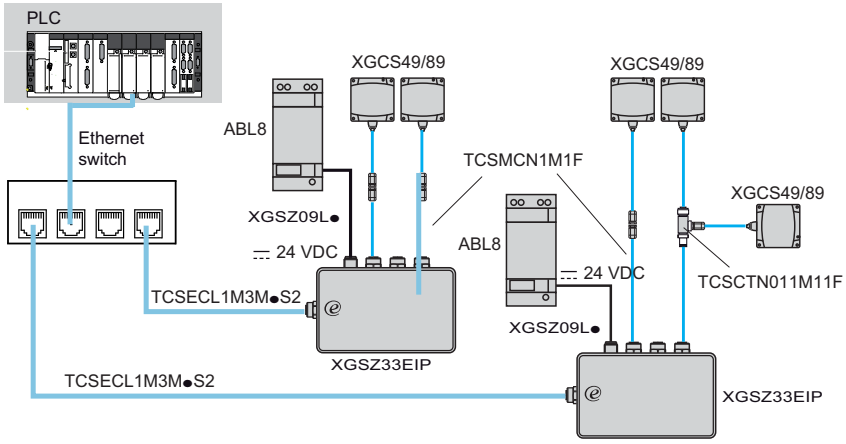


The number of smart antennas connected to each box can be increased by using the M12 T-connector (catalog number TCSCTN011M11F).
To maintain high-performance operation, we recommend that a maximum of 8 compact smart antennas be connected.
The total length of a smart antenna side network for XGCS smart antennas (XGCS49 and XGC89) is limited to 160 m.

OsiSense® XG
Radio Frequency Identification System
13.56 MHz


Example of an architecture in a Profibus network

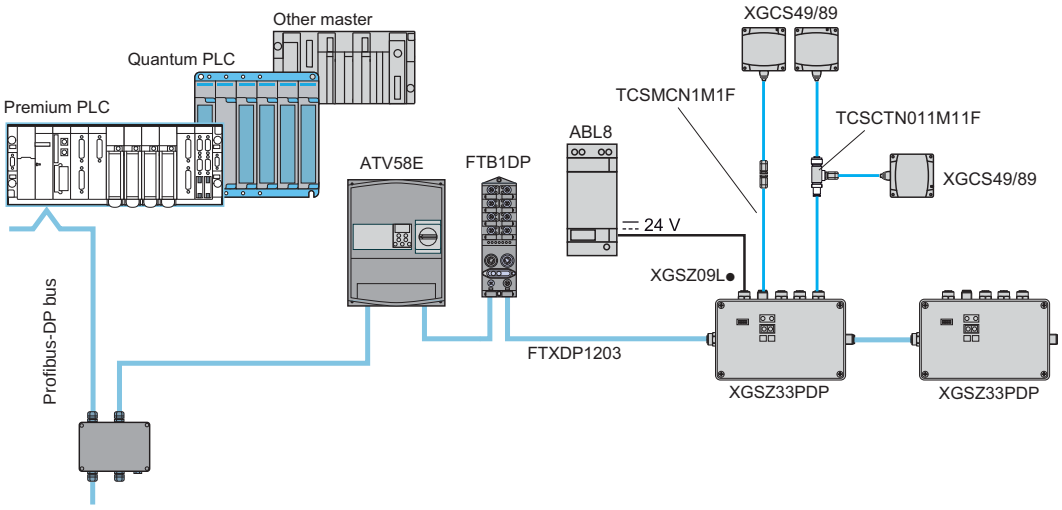

Example of a connection on a Twido™ PLC

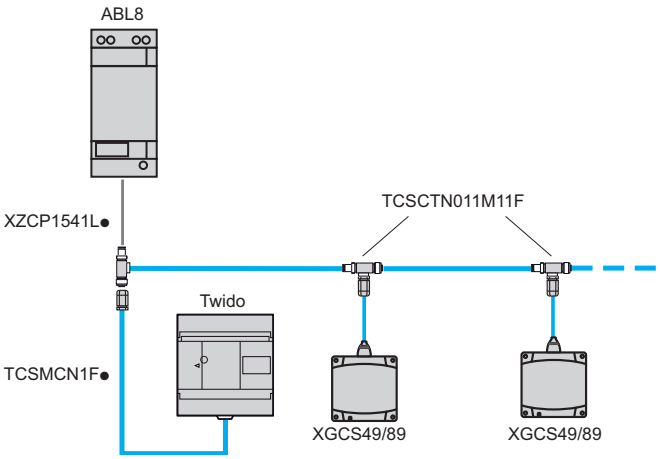

Example of a connection to a PC

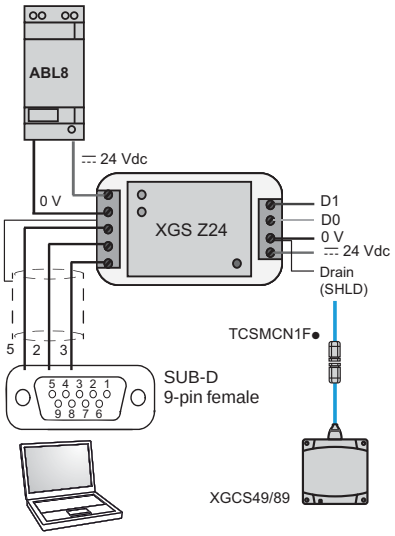

Power supply cable connections

XZCP1541L●				Power supply ABL8
Scheme	**Contact**	**Signal**	**Wire color**	**Terminal**
	1	NC	Brown	–
	2	24 Vdc	White	24 Vdc
	3	0 V GND	Blue	0 V GND
	4	NC	Black	–

TCSMCN1F● cable connections

TCSMCN1F●				Twido™ PLC	
Scheme	**Contact**	**Signal**	**Wire color**	**Terminal**	***Scheme***
	1	Drain (SHLD)	–	–	A B SG
	2	24 Vdc	Red	–	
	3	0 V GND	Black	SG	
	4	D0	White	B	
	5	D1	Blue	A	

The compact smart antennas can be directly connected to the Modbus port of a PLC. Up to 15 compact smart antennas can be linked to the RS-485 port using T-connectors. (In cases where the length of the network exceeds 100 m, fit a line terminator, catalog number FTXCNTL12.)
This cabling system is specific to the OsiSense™ XG RFID System (powered network). No other Modbus slave equipment can be connected to it.

Specifications of XG RFID compact smart antennas

Smart antenna type			XGCS4901201	XGCS8901201
Certifications			UL, FCC part 15c	
Conformity to standards			CE, EN 301489-1, EN 301489-3, ETS 300330-1 and ETS 300330-2	
Ambient air temperature	For operation	**°C (°F)**	–25 to +70 (–13 to +158)	
	For storage	**°C (°F)**	–40 to +85 (–40 to +185)	
Degree of protection	Conforming to IEC 60529		IP 67	
Vibration resistance	Conforming to EN 60068.2.27		2 mm from 5–29.5 Hz / 7 gn from 29.5–150 Hz	
Shock resistance	Conforming to EN 60068.2.6		30 g/11 ms	
	Conforming to EN 50102		Degree IK 02	
Resistance to interference	Conforming to IEC 61000		Resistance to electrostatic discharge, radiated electromagnetic fields, fast transients, electrical surges, conducted and induced interference and network frequency magnetic fields.	
Dimensions, W x H x D		**mm**	Flat form 40: 40 x 40 x 15	Flat form 80: 80 x 80 x 26
RFID frequency		**MHz**	13.56	
Type of associated tag			ISO 15693 and ISO 14443 standard tags. Automatic detection of the type of tag	
Compatible RFID microchip examples			Texas (Tag-it HFI); Philips (SL2, SL1, Ultralight, Std 1K/2K, Desfire; STM (CRIX4K); INSIDE (micropass)	
Nominal sensing distance	Depending on associated tag	**mm (in.)**	18–70 (0.71–2.76)	20–100 (0.79–3.94)
Nominal supply voltage		**Vdc**	⎓ 24 PELV (Protective Extra Low Voltage)	
Supply voltage limits (including ripple)		**Vdc**	⎓ 19.2–29	
Consumption		**mA**	< 60	
Serial links	Type		RS-485	
	Protocol		Modbus RTU or Uni-Telway	
	Speed	**Bd**	9,600–115,200 (automatic detection)	
Display			1 dual color LED for the communication network: Modbus/Uni-Telway 1 dual color LED for the RFID communication (Presence of tag / Smart antenna/tag dialog)	
Connections			M12, 5-pin male, shielded connector. Only for connection to the communication network and the supply.	
Tightening torque	Screws	**Nm**	< 1	< 3

Specifications of portable 13.56 MHz RFID diagnostics terminal

Conformity to standards			CE, FCC class A, Part 15225
Ambient air temperature	For operation	**°C (°F)**	0 to +50 (32 to +122)
	For storage	**°C (°F)**	–25 to +55 (–13 to +131)
Relative humidity		**RH**	5–95% without condensation
Degree of protection			IP 65
Supply voltage			7.2 V NiMH type rechargeable battery (included with terminal) External: ⎓ 11-18 Vdc
Operating time			4 hours continuous operation (tag dialog)
Operating system			Microsoft Windows CE.NET Professional version 4.2
Processor			Intel Xscale® PXA255 CPU, 400 MHz
Memory	RAM		SDRAM 64 Mb (16 Mb reserved for operating system)
	Storage		Internal compact Flash: 512 Mb standard + Slot for compact Flash card (such as memory, wi-fi, Ethernet, or Bluetooth)
Display	Screen		Color touchscreen: 72 mm x 54 mm, QVGA TFT
	Resolution		320 x 240 pixels
Keypad			45 booted keys
Signaling			5 LEDs + 1 charging LED

Specifications of XG RFID connection boxes

Connection box type			Tap-off box TCSAMT31FP	Ethernet box XGSZ33ETH
Certifications			UL	
Conformity to standards			CE	
Ambient air temperature	For operation	**°C (°F)**	–25 to +55 (–13 to +131)	0 to +70 (32 to +158)
	For storage	**°C (°F)**	–40 to +85 (–40 to +185)	–40 to +85 (–40 to +185)
Relative humidity		**RH**	30 to 95% without condensation	
Degree of protection			IP 65	
Supply voltage		**Vdc**	⎓ 24 PELV (limits 19.2–29 V). M12, 4-pin male, A coding, connector	
Consumption (connection box only)		**W**	–	< 1
Smart antenna connection			M12 5-pin female, A coding, connector	
Electromagnetic interference	Conforming to IEC 61000		Level 3	
	Conforming to EN 55022		Class B	
LED display			Power on (green)	- Ethernet network activity (RUN, green) - Collision detection (COL, red) - Diagnostics (STS, yellow) - Error (Err, red) - Power on (green)
Transparent Ready™ Services	Class		–	A10
	Basic Web server		–	IP configuration address
	Basic communication service		–	Modbus messaging (reading/writing of words: 1 to 123 words per request)
Connection	Physical interface		–	10 BASE-T/100BASE-TX
	Transfer rate		–	10/100 Mbps
	Medium		–	Ethernet cable with M12 connection

Specifications of XG RFID electronic tags

Tag Type			XGHB444345	XGHB445345	XGHB90E340	XGHB320345	XGHB221346	XGHB211345
Ambient air temperature	For operation	**°C (°F)**	–25 to +70 (–13 to +158)		–25 to +50 (13 to +122)	–25 to +70 (–13 to +158)		
	For storage	**°C (°F)**	–40 to +85 (–40 to +185)		–40 to +55 (–40 to +131)	–40 to +85 (–40 to +185)		
Degree of protection			IP 68		IP 65		IP 68	
Standard supported			ISO 14443		ISO 15693			
Vibration resistance	Conforming to EN 60068.2.27		2 mm from 5 to 29.5 Hz / 7 gn from 29.5 to 150 Hz					
Shock resistance	Conforming to EN 60068.2.6		30 g/11 ms					
	Conforming to EN 50102		Degree IK 02					
Dimensions		**mm**	40 x 40 x 15	40 x 40 x 15	54 x 85.5 x 1	Ø 30 x 3	26 x 26 x 13	M18 x 1 x 12
Housing material			PBT		PVC	PVC	PBT	PBT
Mounting method			Screw or clip		–	Screw	Screw or clip	Screw in
Memory capacity		**bytes**	3,408	13,632	256	112	256	
Type of memory			EEPROM					
Type of operation			Read/Write					
Type of associated smart antenna			XGCS●●●●●●●					
Nominal sensing distance (Read/Write)	With smart antenna XGCS49	**mm (in.)**	33 (1.30)	30 (1.18)	70 (2.76)	48 (1.89)	40 (1.57)	18 (0.71)
	With smart antenna XGCS89		48 (1.89)	40 (1.57)	100 (3.94)	65 (2.56)	55 (2.17)	20 (0.79)
	With smart antenna XGCS49011201 + field expander XGFEC540		–	–	90 (3.54)	42 (1.65)	–	–
	With smart antenna XGCS49011201 + field expander XGFEC2525		–	–	150 (5.91)	80 (3.15)	42 (1.65)	–
Number of read cycles			Unlimited					
Number of write cycles	Minimum		100,000 per data bit throughout the temperature range					
	At 30 °C (86 °F)		2.5 million (typical value)					
Read time		**ms**	9.25 + 0.375 x n *(1)*	16.25 + 0.375 x n *(1)*	12 + 0.825 x n *(1)*			
Write time		**ms**	13 + 0.8 x n *(1)*	20 + 0.8 x n *(1)*	20 + 11.8 x n *(1)*	12 + 5.6 x n *(1)*	20 + 11.8 x n *(1)*	19 + 4.1 x n *(1)*
Data retention time			10 years					
Mounting on metal support			Yes *(2)*		No		Yes *(2)*	No

(1) n = number of 16-bit words.
(2) Installation information: see page 26.

Specifications of XG RFID connection boxes

Connection box type			Profibus box XGSZ33PDP	Ethernet IP box XGSZ33EIP
Certifications			UL	
Conformity to standards			CE	
Ambient air temperature	For operation	**°C (°F)**	0 to +55 (32 to +131)	0 to +55 (32 to +131)
	For storage	**°C (°F)**	–25 to +85 (–40 to +185)	–25 to +85 (–13 to +185)
Relative humidity		**RH**	30 to 95% without condensation	
Degree of protection			IP 65	
Supply voltage		**Vdc**	⎓ 24 PELV (limits 21.6–26.4 V). M12, 4-pin male, A coding, connector	
Consumption (connection box only)		**W**	< 2.5	< 2.5
Smart antenna connection			M12 5-pin female, A coding	M12 5-pin female, A coding
Electromagnetic interference	Conforming to IEC 61000		Level 3	
	Conforming to EN 55022		Class B	
LED display			- Profibus network activity (RUN, green) - Profibus network activity (OFF, red) - Communications bus (Error, flashing red) - Modbus (RUN, green) - Gateway configuration (green)	- Power on (green) - Network status (Ethernet/IP, green) - Link (Connected, green) - Activity (Receive/transmit, green) - Subnet status (Running, green) - Device Satus (Running/initializing, green)
Transparent Ready™ Services	Class		–	A10
	Basic Web server		–	IP configuration address
	Basic communication service		Reading/writing of words (1 to 49 per request) via the Profibus-DP periodic exchanges service. Profibus-DP V2 aperiodic exchanges not supported.	Reading/writing of words
Connection	Physical interface		–	10 BASE-T/100BASE-TX
	Transfer rate		9.6–12,000 Kbd: automatic detection of speed	10/100 Mbps
	Medium		RS-485 twisted pair	Ethernet cable with M12 connection

Specifications of XG RFID electronic tags

Tag Type			XGHB320246	XGHB440245	XGHB440845	XGHB443245	XGHB411346
Ambient air temperature	For operation	**°C (°F)**	–25 to +85 (–13 to +185)	–25 to +70 (–13 to +158)			–25 to +90 (–13 to +194)
	For storage	**°C (°F)**	–40 to +85 (–40 to +185)	–40 to +85 (–40 to +185)			–25 to +120 (–13 to +248) +160 (+320) for 50 hours +220 (+428) maximum peak temperature
Degree of protection			IP 65	IP 68			
Standard supported			ISO 15693		ISO 14443B		ISO 15693
Vibration resistance	Conforming to EN 60068.2.27		2 mm from 5 to 29.5 Hz / 7 gn from 29.5 to 150 Hz				
Shock resistance	Conforming to EN 60068.2.6		30 g/11 ms				
	Conforming to EN 50102		Degree IK 02				
Dimensions		**mm**	Ø 30 x 3	40 x 40 x 15			Ø 40 x 11
Housing material			PBT	PBT			PPS
Mounting method			Screw	Screw or clip			Screw
Memory capacity		**bytes**	2,048	2,040	8,192	32,768	256 + serial number (8 bytes)
Type of memory			FeRAM				EEPROM
Type of operation			Read/Write				
Type of associated smart antenna			XGCS●●●●●●●				
Nominal sensing distance (Read/Write)	With smart antenna XGCS49	**mm (in.)**	45 (1.77)	45 (1.77)	25 (0.98)		30–39 (1.18–1.54)
	With smart antenna XGCS89		65 (2.55)	65 (2.55)	39 (1.53)		35–46 (1.38–1.81)
	With smart antenna XGCS49011201 + field expander XGFEC540		50 (1.96)	50 (1.96)	–	–	–
	With smart antenna XGCS49011201 + field expander XGFEC2525		40 (1.57)	40 (1.57)	–	–	–
Number of read cycles			Unlimited				
Number of write cycles	At 30 °C (86 °F)		**NOTE:** The lifetime of the tags is closely linked to the temperature conditions. To validate the compatibility of this tag with the requirements of each application, conduct preliminary tests with samples in real conditions.				
Read time *(1)*		**ms**	7+ 2 x n		6 + 0.25 x n		12 + 0.825 x n
Write time *(1)*		**ms**	7+ 2.4 x n		6 + 0.25 x n		20 + 11.8 x n
Data retention time			10 years				
Mounting on metal support			No	Yes			

(1) n = number of 16-bit words. (2) Installation notes: see page 26.

New

OsiSense® XG
Radio Frequency Identification System
13.56 MHz

105909

XGCS4901201

105910

XGHB44●345

105914

XGHB90E340

105911

XGHB221346

105912

XGHB211345


XGHB411346

105913

XGHB320345

105915

TCSAMT31FP

(1) Configuration badge XGSZCNF01 included with smart antenna—installation guide must be ordered separately (catalog number DIA4ED3051001).
(2) Metal mounted: 30 mm (1.18 in.) with XGCS49p; 45 mm (1.77 in.) with XGCS89●.
(3) Customized versions on request.
(4) Download GSD configuration file (SE100BBB.gsd) from www.Schneider-Electric.com (Products and services/Automation and control/Detection/RFID).
(5) Metal mounted: 20 mm (0.78 in.) with XGCS49p; 28 mm (1.10 in.) with XGCS89●.

Compact smart antennas, 13.56 MHz

Description	Protocols	Dimensions mm	Catalog number	Weight kg (lb)
Compact smart antenna **Flat form 40** *(1)* M12 male connector on flying lead	Modbus RTU and Uni-Telway	40 x 40 x 15	**XGCS4901201**	0.057 (0.126)
Compact smart antenna Flat form 80 *(1)* M12 male connector on flying lead	Modbus RTU and Uni-Telway	80 x 80 x 26	**XGCS8901201**	0.257 (0.567)

Electronic tags

Tag type	Nominal sensing dist. XGCS49●	Nominal sensing dist. XGCS89●	Dimensions mm	Sold in lots of	Unit catalog number	Weight kg (lb)
Flat form 40 3 K bytes EEPROM	33 mm (1.30 in.)	48 mm (1.89 in.)	40 x 40 x 15	–	**XGHB444345**	0.031 (0.068)
Flat form 40 13 K bytes EEPROM	30 mm (1.80 in.)	40 mm (1.57 in.)	40 x 40 x 15	–	**XGHB445345**	0.031 (0.068)
Flat form 40 2 K bytes FeRAM	45 mm (1.77 in.) *(2)*	65 mm (2.56 in.) *(2)*	40 x 40 x 15	–	**XGHB440245**	0.031 (0.068)
Flat form 40 8 K bytes FeRAM	25 mm (0.98 in.) *(5)*	39 mm (1.54 in.) *(5)*	40 x 40 x 15	–	**XGHB440845**	0.031 (0.068)
Flat form 40 32 K bytes FeRAM	25 mm (0.98 in.) *(5)*	39 mm (1.54 in.) *(5)*	40 x 40 x 15	–	**XGHB443245**	0.031 (0.068)
ISO badge (3) 256 bytes EEPROM	70 mm (2.76 in.)	100 mm (3.94 in.)	54 x 85.5 x 1	10	**XGHB90E340**	0.005 (0.011)
Disc 112 bytes EEPROM	48 mm (1.89 in.)	65 mm (2.56 in.)	Ø 30 x 3	5	**XGHB320345**	0.005 (0.011)
Disc 2 K bytes FeRAM	45 mm (1.77 in.)	65 mm (2.56 in.)	Ø 30 x 3	5	**XGHB320246**	0.005 (0.011)
Flat form 26 256 bytes EEPROM	40 mm (1.57 in.)	55 mm (2.17 in.)	26 x 26 x 13	1	**XGHB221346**	0.025 (0.055)
Cylindrical 256 bytes EEPROM	18 mm (0.71 in.)	20 mm (0.79 in.)	M18 x 1 x 12	5	**XGHB211345**	0.020 (0.044)
Cylindrical 256 bytes EEPROM	30–39 (1.18–1.54 in.)	35–46 (1.38–1.81 in.)	M40 x 11	–	**XGHB411346**	0.025 (0.055)

Connection boxes

Description	For use with	Supply voltage	Catalog number	Weight kg (lb)
Ethernet box 3-channel Integrated Ethernet port (10/100 Mbps) Modbus TCP/IP protocol Class A10	Compact smart antennas XGCS49● and XGCS89●	⎓ 24 Vdc	**XGSZ33ETH**	1.060 (2.337)
Tap-off box 3-channel Modbus and Uni-Telway	Compact smart antennas XGCS49● and XGCS89●	⎓ 24 Vdc	**TCSAMT31FP**	1.060 (2.337)
Profibus box 3-channel Profibus-DP protocol *(4)*	Compact smart antennas XGCS49● and XGCS89●	⎓ 24 Vdc	**XGSZ33PDP**	1.060 (2.337)
Ethernet/IP box 3-channel Integrated Ethernet port (10/100 Mbps)	Compact smart antennas XGCS49● and XGCS89●	⎓ 24 Vdc	**XGSZ33EIP**	1.060 (2.337)

OsiSense® XG
Radio Frequency Identification System 13.56 MHz



XGFEC540



XGFEC2525

Field expanders *(3)*

Description	Nominal sensing distance	For use with	Catalog number	Weight kg (lb)
Conveying type field expander Dimensions (mm) 400 x 23 x 50 **(1)**	30–90 mm (1.18–3.54 in.) depending on tag used (only ISO 15693)	Smart antenna XGCS4901201 Tags XGHB90E340 XGHB320345 XGHB221346	**XGFEC540**	0.640 (1.411)
Universal type field expander Dimensions (mm) 250 x 250 x 10 **(1)**	26–150 mm (1.02–5.91 in.) depending on tag used (only ISO 15693)	Smart antenna XGCS4901201 Tags XGHB90E340 XGHB320345	**XGFEC2525**	0.565 (1.466)

105918



XGSTP401

105920



XGSTP41BA

Terminal and accessories

Description	Application	Catalog number	Weight kg (lb)
Portable 13.56 MHz RFID diagnostics terminal (2)	Read/write operations on electronic tags and diagnostics on compact smart antennas Operating system: Microsoft Windows CE.NET Professional version 4.2	**XGSTP401**	0.943 (2.079)
Battery pack charger	Portable terminal	**XGSTP41CH**	0.675 (1.488)
Battery, 7.2 V NiMH	Portable terminal	**XGSTP41BA**	0.168 (0.370)
Compact Flash memory expansion	Portable terminal Capacity = 128 Mb	**XBTZGM128**	0.050 (0.110)

105921



XGSZCNF01

Configuration badge (replacement)

Description	Application	Catalog number	Weight kg (lb)
Badge	Configuration of smart antenna addresses	**XGSZCNF01**	0.005 (0.011)

Documentation

Description	Catalog number	Weight kg (lb)
XG RFID compact smart antennas guide	**DIA4ED3051001**	0.130 (0.029)

(1) For other dimensions, please consult your local sales office.

(2) Includes OsiSense™ XG RFID system software (installed), universal battery charger, PC connecting cable, 3 styluses, protective cover, battery, and user guide.

(3) For custom shape field expanders, contact the Sensor Competency Center at 1-800-435-2121.

OsiSense® XG

Radio Frequency Identification System 13.56 MHz

105925



TCSMCN1FQM2

105927



TCSMCN1F9M2P

Modbus™ network connection accessories

Description	Application	Length m	Catalog number	Weight kg (lbs)
Modbus shielded connecting cable, black, IP 67 M12 connectors, male/female, A coding (1)	RS-485 connection between a compact smart antenna and a tap-off box TCSAMT31FP or between 2 tap-off boxes	1	**TCSMCN1M1F1**	0.080 (0.176)
		2	**TCSMCN1M1F2**	0.115 (0.254)
		5	**TCSMCN1M1F5**	0.270 (0.595)
		10	**TCSMCN1M1F10**	0.520 (1.146)
Modbus shielded pre-wired M12 connector, IP 67, female/bare wires, A coding (1)	Connection between tap-off box TCSAMT31FP and Modbus/ Uni-Telway network (TSXSCA50)	2	**TCSMCN1F2**	0.115 (0.254)
		5	**TCSMCN1F5**	0.270 (0.595)
		10	**TCSMCN1F10**	0.520 (1.146)
Modbus shielded connecting cable, black, M12/SUB-D15, A coding	Connection between tap-off box TCS AMT31FP and Modbus/Uni-Telway network (TSXSCA62)	2	**TCSMCN1FQM2**	0.270 (0.595)
Modbus shielded connecting cable, black, M12/Mini-DIN 8-way, A coding	Modbus connection between tap-off box TCSAMT31FP and a PLC (such as Twido™)	2	**TCSMCN1F9M2P**	0.350 (0.772)
Modbus SL serial link cable (Shielded dual twisted pair RS-485 main cables)	Modbus SL serial link	100	**TSXCSA100**	5.680 (12.522)
		200	**TSXCSA200**	10.920 (24.074)
		500	**TSXCSA500**	30.000 (66.139)

Ethernet connection accessories

Ethernet connection accessories for IP 67 switch

Description	End fittings	Length m	Catalog number	Weight kg (lbs)
Copper connecting cables, straight	1 x IP 67 M12 4-pin connector and 1 x RJ45 connector	1	**TCSEL1F3M12S2D**	–
		3	**TCSEL1F3M13S2D**	–
		10	**TCSEL1F3M110S2D**	–
		25	**TCSEL1F3M125S2D**	–
		40	**TCSEL1F3M140S2D**	–
	2 x IP 67 M12 4-pin connectors	1	**TCSEL1F1F12S2D**	–
		3	**TCSEL1F1F13S2D**	–
		10	**TCSEL1F1F110S2D**	–
		25	**TCSEL1F1F125S2D**	–
		40	**TCSEL1F1F140S2D**	–
M12 Ethernet switch IP 67, ConneXium™ *(2)*	–	–	**TCSESU051F0**	0.210 (0.463)
M12 female/RJ45 adapter	Ethernet connection	–	**TCSEAAF11F13F00**	–

Do-It-Yourself Ethernet copper cable and connectors

The Do-It-Yourself ConneXium™ Ethernet system allows Ethernet copper connecting cables to be prepared on-site in the required length. The cables are intended for connection to the Ethernet 10/100 Mbps network. The maximum length of the connecting cables made in this way is 80 m. The cabling can be quickly assembled using a knife and ordinary wire cutters—no special tools required.

Description	Specifications	Length m	Catalog number	Weight kg (lbs)
Ethernet copper cable 2 x 24 AWG shielded dual twisted pairs	Conforms to applicable standards and approvals	300	**TCSECN300R2**	–
RJ45 connector	Conforms to EIA/TIA-568-D	–	**TCSEK3MDS**	–
M12 connector	Conforms to IEC 60176-2-101	–	**TCSEK1MDRS**	–

106410



ABL8MEM24003

Power supplies

Description	Output voltage	Nominal power	Nominal current	Catalog number	Weight
	Vdc	W	A		kg (lbs)
Regulated power supply 100/240 Vac	24	7	0.3	**ABL8MEM24003**	0.180 (0.397)
		30	1.2	**ABL8MEM24012**	0.520 (1.146)

(1) Holder for identification legend included with product.

(2) Other ConneXium™ connection accessories: refer to www.Schneider-Electric.com.

Profibus-DP connection accessories

Description	Composition	Type	Length m	Catalog number	Weight kg (lb)
Connecting cable for connection between Profibus box XGSZ33DP and Profibus-DP network	Fitted with 2 x M12 5-pin connectors	Straight	0.3	**FTXDP1203**	0.040 (0.088)
			0.6	**FTXDP1206**	0.070 (0.154)
			1	**FTXDP1210**	0.100 (0.220)
			2	**FTXDP1220**	0.160 (0.353)
			3	**FTXDP1230**	0.220 (0.485)
			5	**FTXDP1250**	0.430 (0.948)
		Elbowed	0.3	**FTXDP3203**	0.040 (0.088)
			0.6	**FTXDP3206**	0.070 (0.154)
			1	**FTXDP3210**	0.100 (0.220)
			2	**FTXDP3220**	0.160 (0.353)
			3	**FTXDP3230**	0.220 (0.485)
			5	**FTXDP3250**	0.430 (0.948)
M12 connector, 5-pin male, B coding			–	**FTXDP12M5**	0.050 (0.110)
M12 connector, 5-pin female, B coding			–	**FTXDP12F5**	0.050 (0.110)
Network terminator, M12 connector			–	**FTXDPTL12**	0.010 (0.022)
Cable without end fittings			100	**TSXPBSCA100**	–
			400	**TSXPBSCA400**	–

Other connection accessories

Description	Application	Length m	Catalog number	Weight kg (lbs)
Pre-wired M12 4-pin female supply connector, A coding (1)	⎓ 24 V supply to connection boxes XGSZ33ETH and TCS AMT31FP	2	**XGSZ09L2**	0.115 (0.254)
		5	**XGSZ09L5**	0.270 (0.595)
		10	**XGSZ09L10**	0.520 (1.146)
M12 5-pin female, A coding, connector	–	–	**FTXCN12F5**	0.050 (0.110)
M12, 5-pin male, A coding, connector	–	–	**FTXCN12M5**	0.050 (0.110)
Network T connector, M12, 1 male/2 female 5-pin, A coding	RS-485 network	–	**TCSCTN011M11F**	0.035 (0.070)
Supply connector, screw terminals, M12 straight, A coding	–	–	**XZCC12FDM40B**	0.020 (0.044)
Protective cap (Sold in lots of 10)	M12 female connector	–	**FTXCM12B**	0.100 (0.220)
Network terminator, M12 male, 120 W	–	–	**FTXCNTL12**	0.010 (0.022)
Line adapter, RS-232C/RS-485, without modem signals. Supply: c 18–30 Vdc. Consumption: 20 mA. Maximum transmission speed: 19,200 bd. Mounting on 35 mm 7 rail.			**XGSZ24**	–

(1) Holder for the identification legend included with product.



TCSCTN011M11F


Mounting accessories

Description	For use with	Catalog number	Weight kg (lbs)
Clip-on 90° mounting bracket	Flat form 40 smart antenna: XGCS4901201 Flat form 40 tags: XGHB44●345	**XSZBC90**	0.060 (0.132)
	Tags XGHB221346	**XSZBE90**	0.060 (0.132)
Clip-on mounting plate	Flat form 40 smart antenna: XGCS4901201 Flat form 40 tags: XGHB44●345	**XSZBC00**	0.025 (0.055)
	Tags XGHB221346	**XSZBE00**	0.025 (0.055)
Mounting plate	Connection boxes TCSAMT31FP and XGSZ33ETH	**XGSZ3P**	0.195 (0.430)
3D Mounting kit (2)	Field expander XGFEC2525		
Support for M12 rod		**XUZ2003**	0.220 (0.485)
M12 rod		**XUZ2001**	0.050 (0.110)
Ball-joint mounted mounting bracket		**XUZX2003**	0.220 (0.485)

(2) For a 3D mounting kit, order the following: rod support **XUZ2003**, *M12 rod* **XUZ2001**, *and ball-joint mounting bracket* **XUZX2003**.



XGSZ3P





XGSZ05


Other accessories

Description	Sold in lots of	Catalog number	Weight kg (lbs)
Key for screwing in/unscrewing Ø18 mm cylindrical tag	5	**XGSZ05**	0.011 (0.024)
Identification legend for 23 x 4 mm connecting cables	200	**XGSZ08MKW**	0.056 (0.123)


OsiSense® XG
Radio Frequency Identification System
13.56 MHz

Compact smart antennas (mm)

XGCS4901201

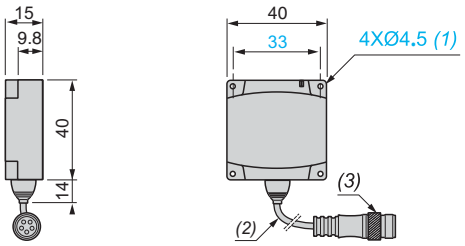

XGCS8901201

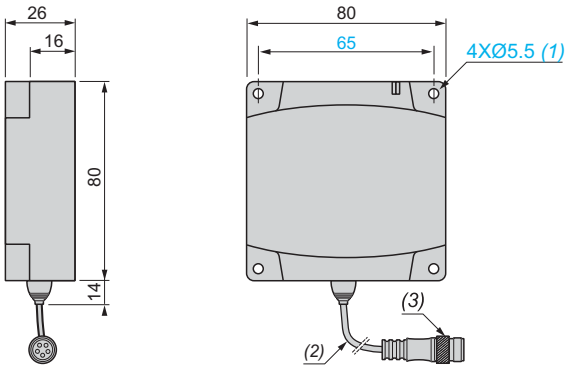


(1) For CHC type screws. *(2) Shielded cable (length: 20 cm).* *(3) M12 5-pin male, A coding, connector.*


Read/write electronic tags (mm)

Square format tags

XGHB44●345

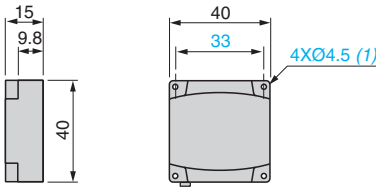


XGHB221346



(1) For CHC type screws.


Rectangular format tags

XGHB90E340

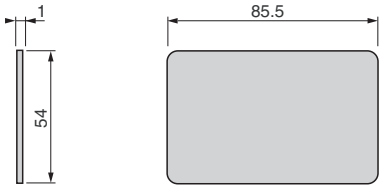


Cylindrical format tags


XGHB320345



XGHB211345




XGHB411346




Connection boxes (mm) (1)


Tap-off box TCSAMT31FP

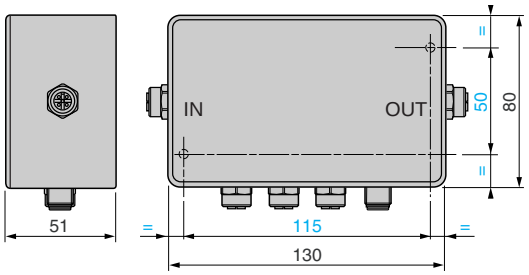


Ethernet box XGSZ33ETH

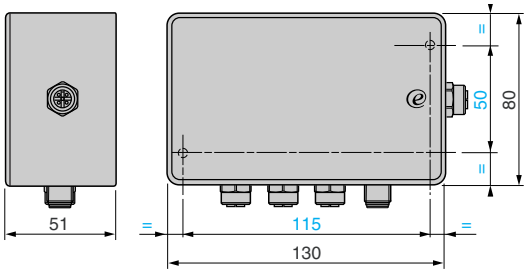


Profibus box XGSZ33PDP

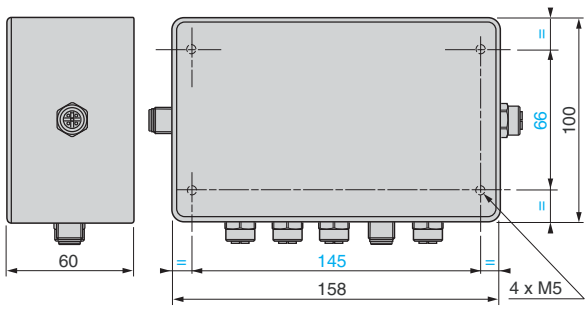

Ethernet IP splitter box XGSZ33EIP

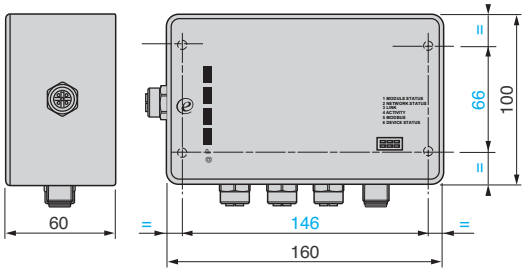


Mounting plate XGSZ3P

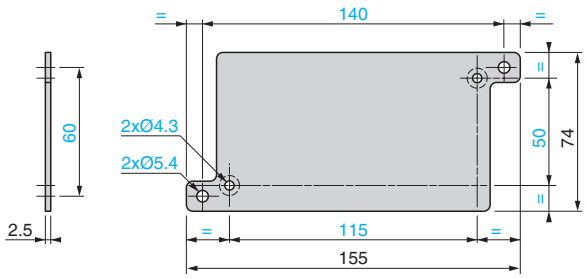

(1) Allow a 110 mm clearance zone for connecting the cables.


Mounting brackets (mm)

XSZBC90

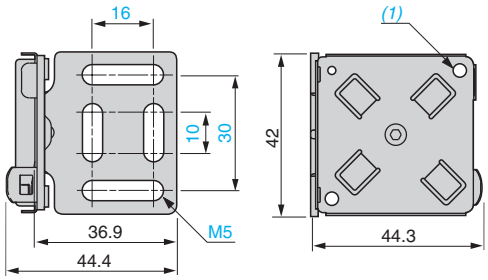

(1) Four M4 x 14 screws (included).


XSZBE90

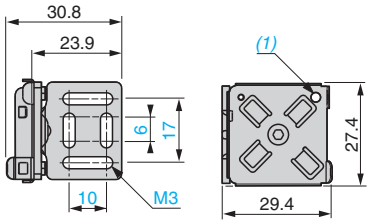

(1) Two M3 x 12 screws (included).


Mounting plates (mm)

XSZBC00

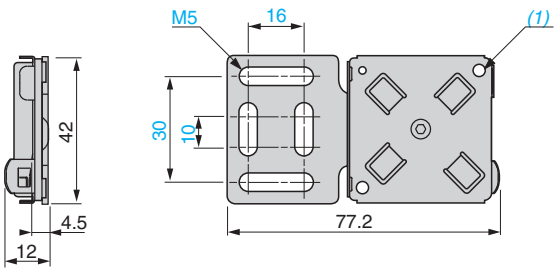

(1) Four M4 x 14 screws (included).

XSZBE00

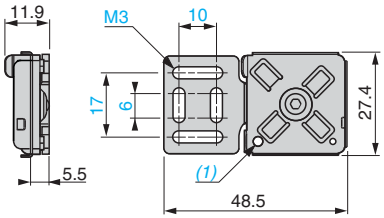


(1) Two M3 x 12 screws (included).

OsiSense® XG
Radio Frequency Identification System
13.56 MHz


Portable RFID diagnostics terminal (mm)

XGSTP401

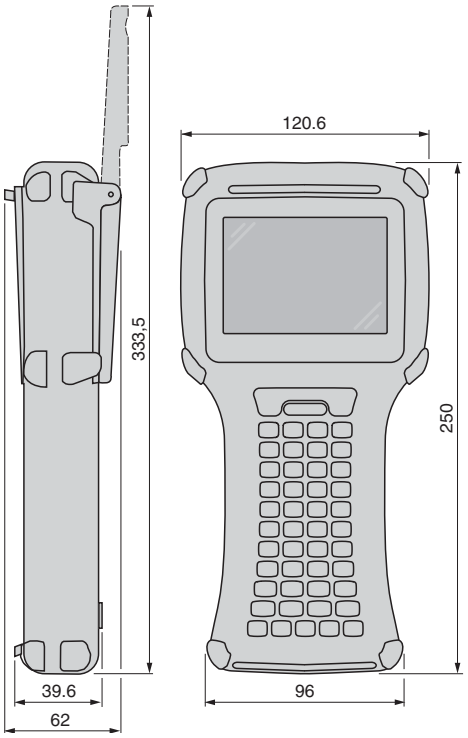


Field expanders (mm)

Conveying type XGSEC540

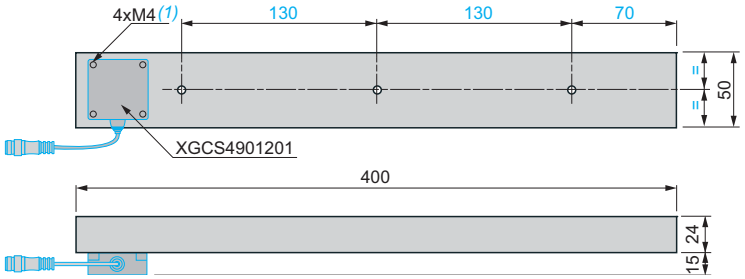

(1) Four M4 screws (included).

Universal type XGSEC2525

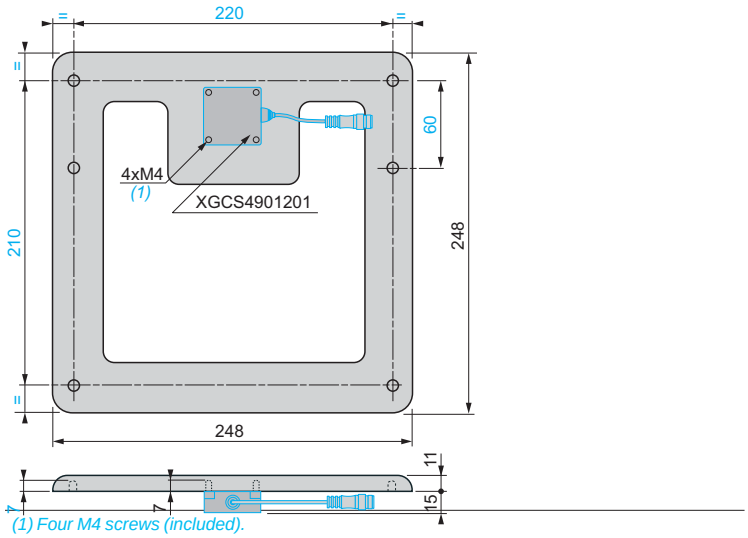


(1) Four M4 screws (included).

OsiSense® XG
Radio Frequency Identification System
13.56 MHz

Modbus connections

XGCS smart antennas ●901201



Pin no.	Smart antenna—Modbus signal
1	Drain (Modbus-SHLD)
2	⎓ +24 Vdc
3	0 V/Modbus -GND
4	D0
5	D1
Connector casing	Shielding

(1) Shielding per pair.
(2) General cable shielding.

Tap-off box TCSAMT31FP

Socket to smart antenna cabling



Pin no.	Signal
1 –	Drain (Modbus-SHLD)
2	⎓ +24 Vdc
3	0 V/Modbus-GND
4	D0
5	D1

Socket to power supply cabling



Pin no.	Signal
1	⎓ +24 Vdc
2	⎓ +24 Vdc
3	⎓ 0 Vdc
4	⎓ 0 Vdc

Socket to another connection box cabling



Pin no.	Signal
1	Drain (Modbus-SHLD)
2	–
3	0 V/Modbus-GND
4	D0
5	D1

Socket to industrial PLC cabling



Pin no.	Signal
1	Drain (Modbus-SHLD)
2	–
3	0 V/Modbus-GND
4	D0
5	D1

Cable connections

TCS MCN1F●



Pin no.	Signal
1 –	Drain (Modbus-SHLD)
2 Red	⎓ +24 Vdc
3 Black	0 V/Modbus-GND
4 White	D0
5 Blue	D1
Connector casing	Shielding

XGS Z09L



Pin no.	Signal
1 Red	⎓ +24 Vdc
2 NC	
3 Black	⎓ 0 Vdc
4 NC	

Ethernet connection

Ethernet box XGSZ33ETH/XGSZ33EIP

Socket to smart antenna cabling



Pin no.	Signal
1 –	GND
2	⎓ +24 Vdc
3	0 Vdc
4	D0
5	D1

Socket to power supply cabling




Pin no.	Signal
1	⎓ +24 Vdc
2	⎓ +24 Vdc
3	⎓ 0 Vdc
4	⎓ 0 Vdc

Cable XGSZ09L connections



Pin no.	Signal
1 Red	⎓ +24 Vdc
2 NC	–
3 Black	⎓ 0 Vdc
4 NC	–

Ethernet socket connection



Cable TCS ECL1M3M●●S2

M12	Signal	Signal	RJ45
1	TD +	TD +	1
3	TD –	TD –	2
2	RD +	RD +	3
4	RD –	RD –	6

Profibus-DP connection

Profibus box XGSZ33PDP

Socket to smart antenna cabling




Pin no.	Signal
1	GND
2	⎓ +24 Vdc
3	0 Vdc
4	D0
5	D1

Socket to power supply cabling



Pin no.	Signal
1	⎓ +24 Vdc
2	⎓ +24 Vdc
3	0 Vdc
4	0 Vdc


Profibus-DP network connections



Input	Output	Pin no.	Signal	Description
		1	VP	Line terminator polarization
		2	RxD/TxD-N	Receive/transmit data (-) (red wire)
		3	DGND	GND Profibus
		4	RxD/TxD-P	Receive/transmit data (+) (green wire)
		5	Shielding	Shielding or GND
		Connector casing	Shielding	Shielding or GND


OsiSense® XG
Radio Frequency Identification System
13.56 MHz


Detection zones of compact smart antennas



(1) Recommended crossing zone: between 0.4 and 0.8 Sn.

Angular positioning between smart antenna and tag







K = correction coefficient to be applied to the nominal sensing distance. Read distance = nominal sensing distance x K.

Smart antenna and tag selection according to passing speeds

Read time with smart antenna XGCS49●●●●●

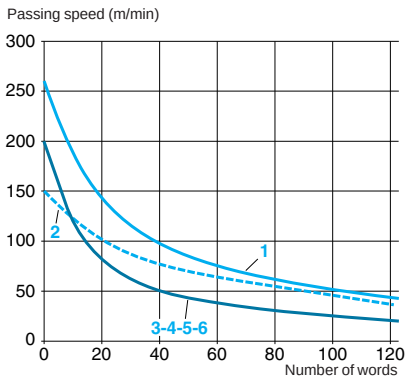


Write time with smart antenna XGCS49●●●●●

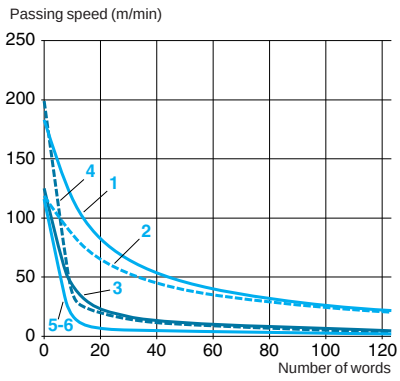


1 XGHB444345
2 XGHB445345
3 XGHB211345
4 XGHB320345
5 XGHB90E340
6 XGHB221346

Read time with smart antenna XGCS89●●●●●

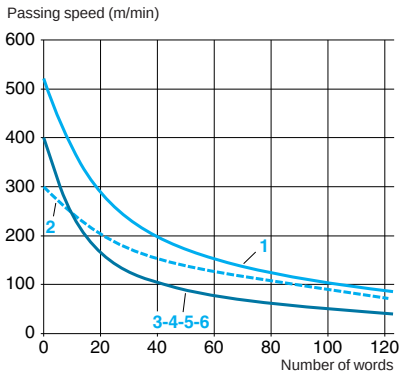

Write time with smart antenna XGCS89●●●●

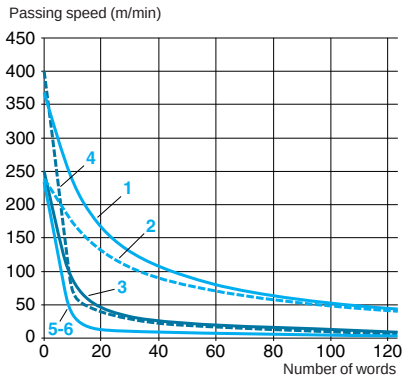


1 XGHB444345
2 XGHB445345
3 XGHB211345
4 XGHB320345
5 XGHB90E340
6 XGHB221346

Application example


Read time with smart antenna XGCS49●●●●●

On an assembly line, the object passing speed is 100 m/min. The application requires that 60 words be read.

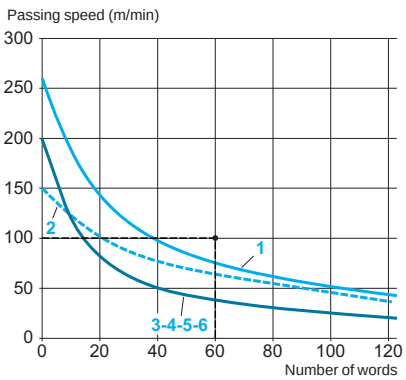

Smart antenna XGC S49 cannot be used; no OsiSense™ XG tag can be read under these conditions (Speed/Number of words).

Write time with smart antenna XGCS89●●●●●

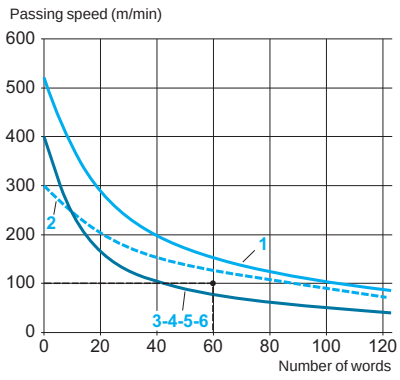


1 XGHB444345
2 XGHB445345
3 XGHB211345
4 XGHB320345
5 XGHB90E340
6 XGHB221346

Smart antenna XGC S89 can be used; only tags XGHB444345 and XGHB445345 meet the requirements (Speed/Number of words).

Dialog zones for field expanders


Field expander + electronic tag

XGFEC540 + XGHB90E340

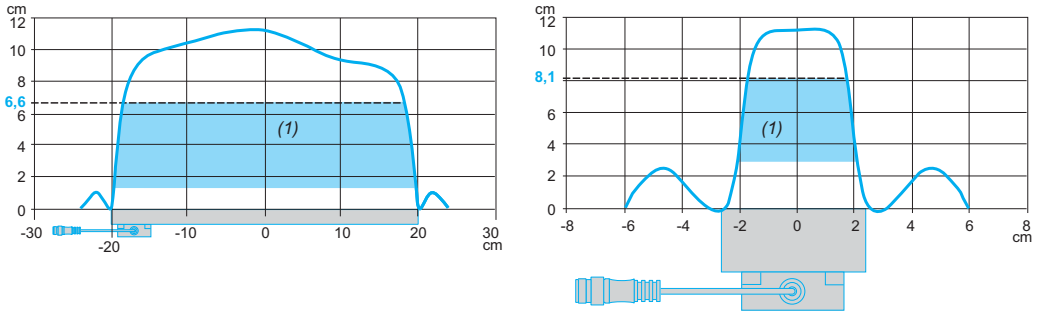


(1) Recommended working zone.

XGFEC540 + XGHB320345

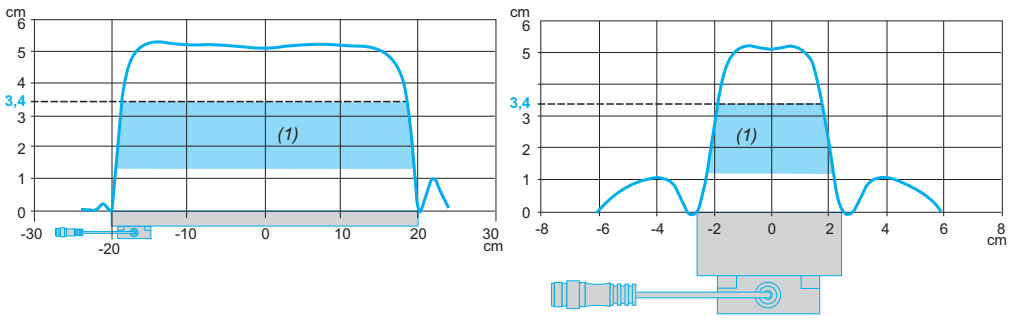


(1) Recommended working zone.

XGFEC2525 + XGHB90E340

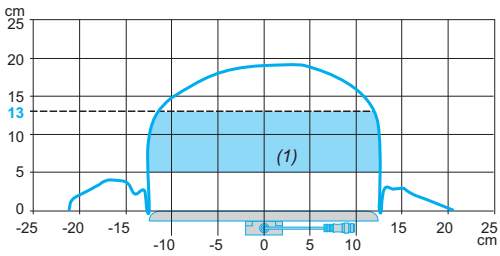

XGFEC2525 + tag XGHB320345

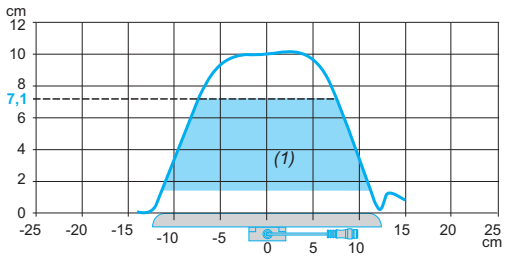


(1) Recommended working zone.

OsiSense® XG
Radio Frequency Identification System
13.56 MHz

Distance between smart antennas (mm)


Minimum distance between 2 identical smart antennas in relation to their positioning and the type of tag used

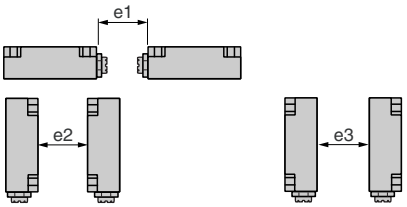

Tag	Flat form 40 XGCS4 smart antenna			Flat form 80 XGCS8 smart antenna		
	e1	e2	e3	e1	e2	e3
XGHB90E340	310	550	120	430	750	280
XGHB221346	200	320	100	280	530	260
XGHB320345	140	360	110	310	540	240
XGHB211345	210	180	60	200	370	170
XGHB444345	90	190	30	310	400	160
XGHB445345	110	170	30	310	380	160

Distance between field expanders


Minimum distance between 2 field expanders in relation to their positioning and the type of tag used

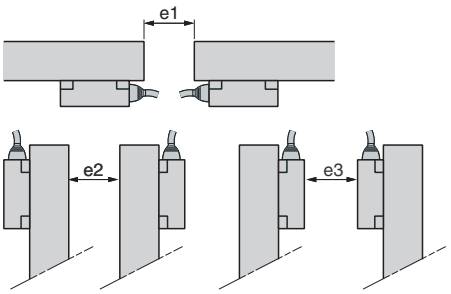

Tag	Field expander XGFEC540			Field expander XGFEC2525		
	e1	e2	e3	e1	e2	e3
XGHB90E340	195	285	195	570	890	960
XGHB320345	420	540	450	720	1275	1200

Distance between tags (mm)

Minimum distance between 2 identical tags in relation to their positioning and the type of smart antenna used

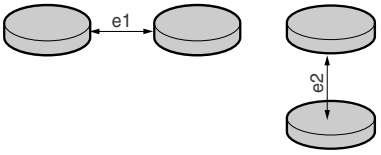


Tag	Flat form 40 XGCS4 smart antenna		Flat form 80 XGCS8 smart antenna	
	e1	e2	e1	e2
XGHB90E340	35	60	110	140
XGHB221346	50	10	120	50
XGHB320345	70	50	190	60
XGHB211345	40	10	120	20
XGHB444345	20	10	70	40
XGHB440245	—	—	60	10
XGHB440845	—	—	60	10
XGHB443245	—	—	60	10
XGHB445345	10	10	60	10
XGHB320246	—	—	60	10


Minimum permissible mounting distances in a metal structure

Smart antennas and tags

XGCS smart antennas 49/89 and Tags XGHB221346/B444345/B445345




e ⩾ 20 mm.



e ⩾ 20 mm.

Tag XGHB320345 and XGHB320246




e ⩾ 15 mm.

Tags XGHB90E340 and XGHB211345

No metal parts within 25 mm of the tag.

Field expanders

	e (mm)	h (mm)
XGFEC540	15	30
XGFEC2525	0	75



Sensing distance

Tags	Nominal sensing distance, mm (in.)		Reduced sensing distance with the presence of metal, mm (in.)	
	XGCS49	XGCS89	XGCS49	XGCS89
XGHB90E340	70 (2.76)	100 (3.94)	58 (2.28)	80 (3.15)
XGHB221346	40 (1.57)	55 (2.17)	30 (1.18)	33 (1.30)
XGHB320345	48 (1.89)	65 (2.56)	45 (1.77)	56 (2.20)
XGHB211345	18 (0.71)	20 (0.79)	16 (0.63)	15 (0.59)
XGHB444345	33 (1.30)	48 (1.89)	28 (1.10)	34 (1.34)
XGHB440245	45 (1.77)	65 (2.56)	30 (1.18)	45 (1.77)
XGHB440845	—	39 (1.54)	—	28 (1.10)
XGHB443245	—	39 (1.54)	—	28 (1.10)
XGHB445345	30 (1.18)	40 (1.57)	24 (0.94)	28 (1.10)

Schneider Electric USA, Inc.

Schneider Electric Sensor
Competency Center
1875 Founders Drive
Dayton Ohio, 45420
(800) 435-2121

www.SeSensors.com

The information and dimensions in this catalog are provided for the convenience of our customers. While this information is believed to be accurate, Schneider Electric reserves the right to make updates and changes without prior notification and assumes no liability for an errors or omissions.

9006CT0902R01/11 June 2011

© 2010–2011 Schneider Electric. All Rights Reserved.