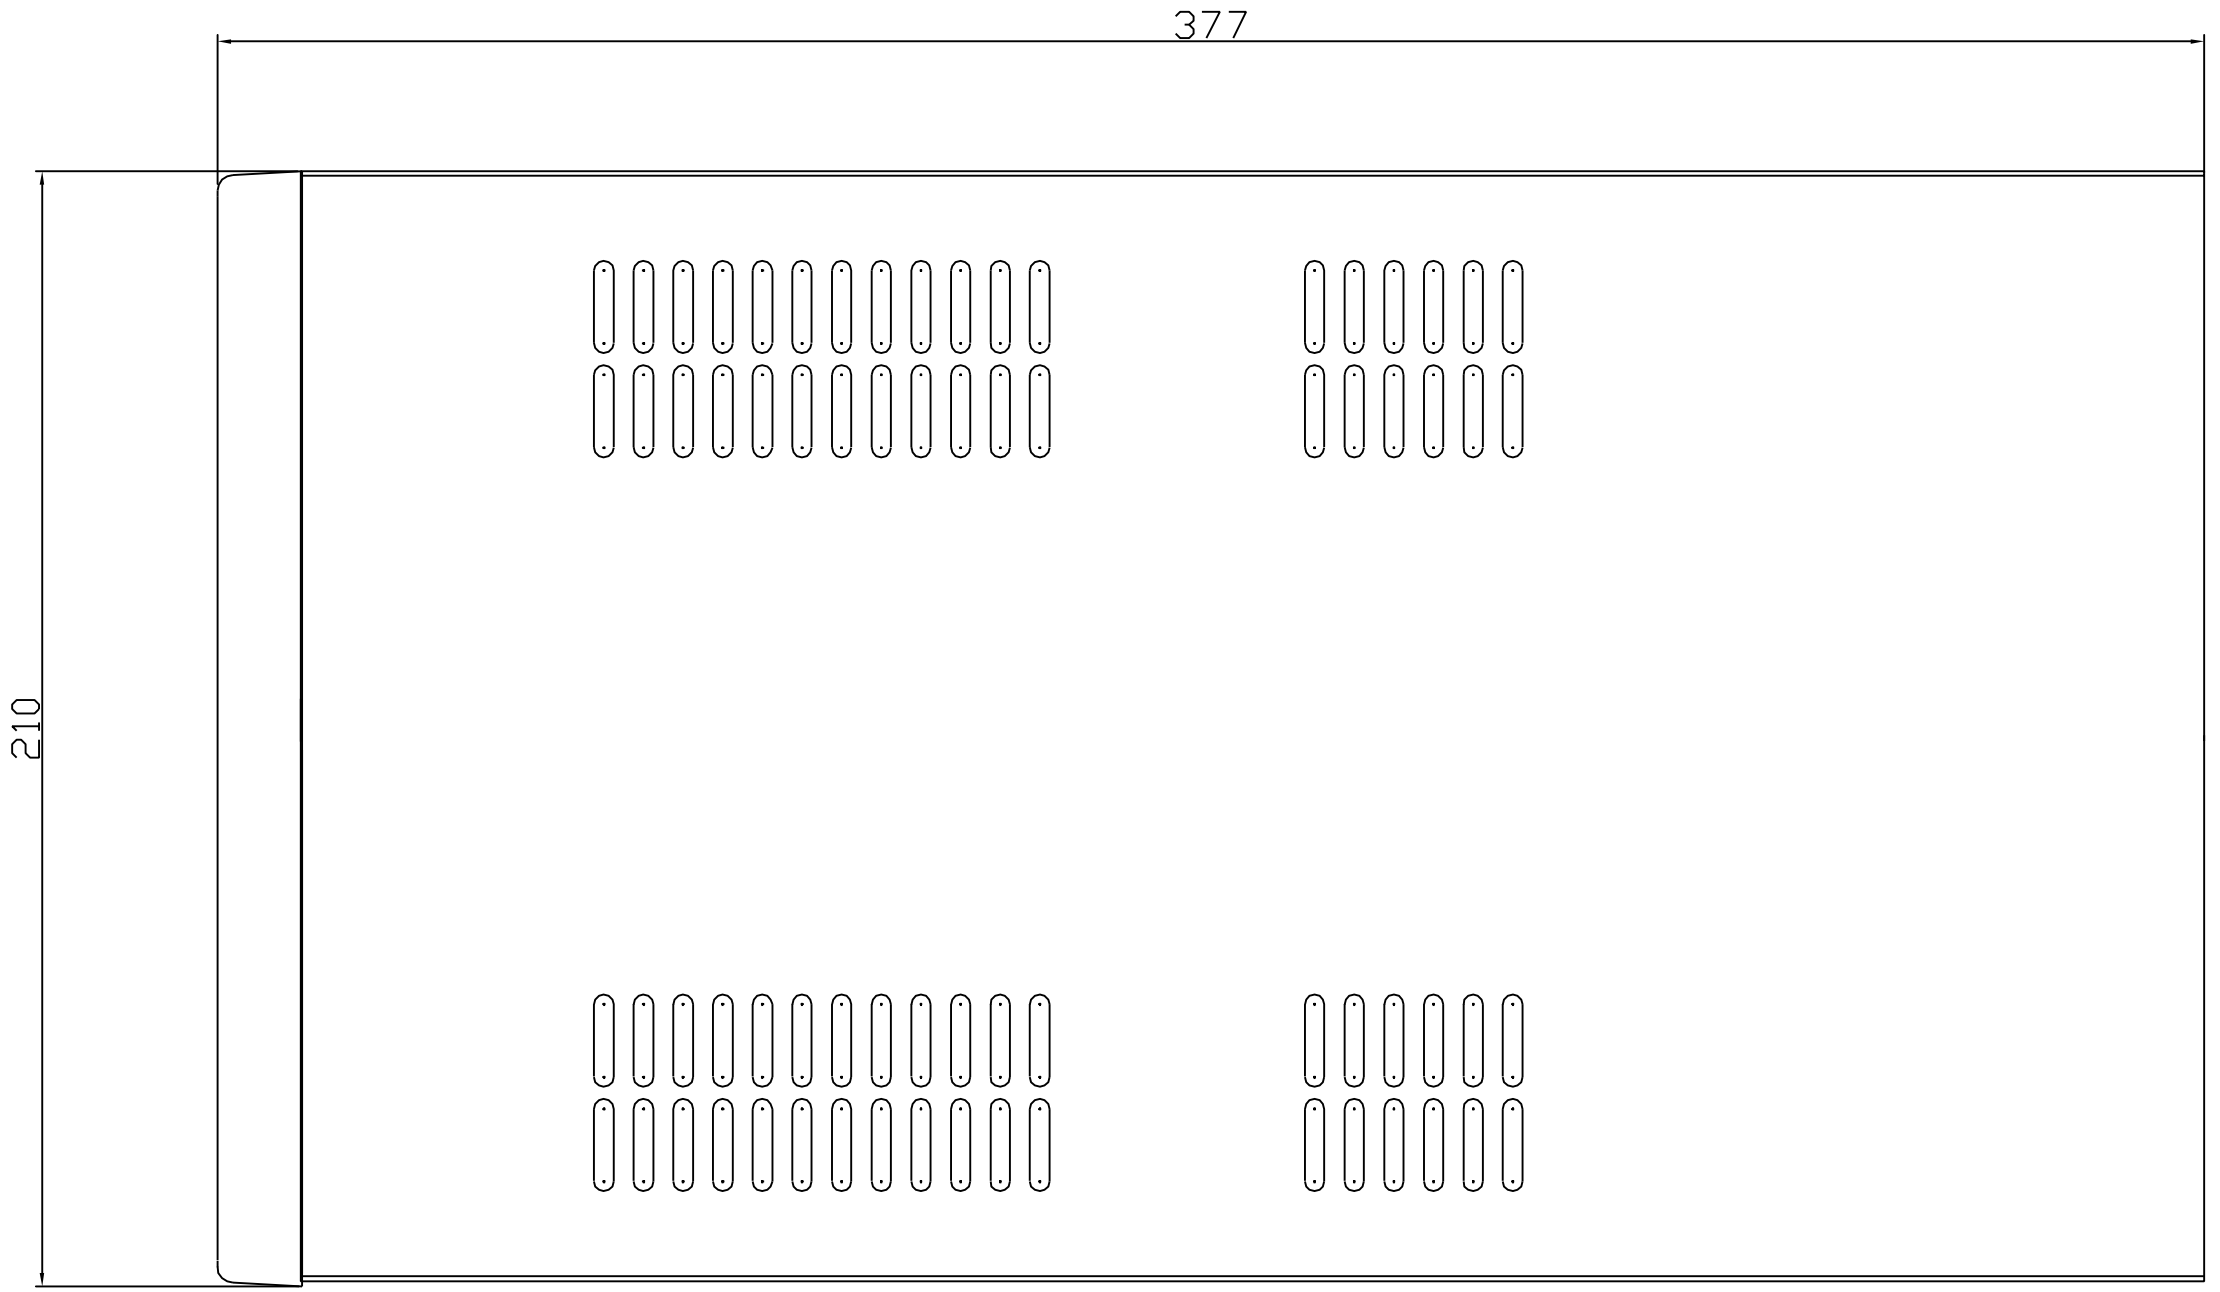
377
210

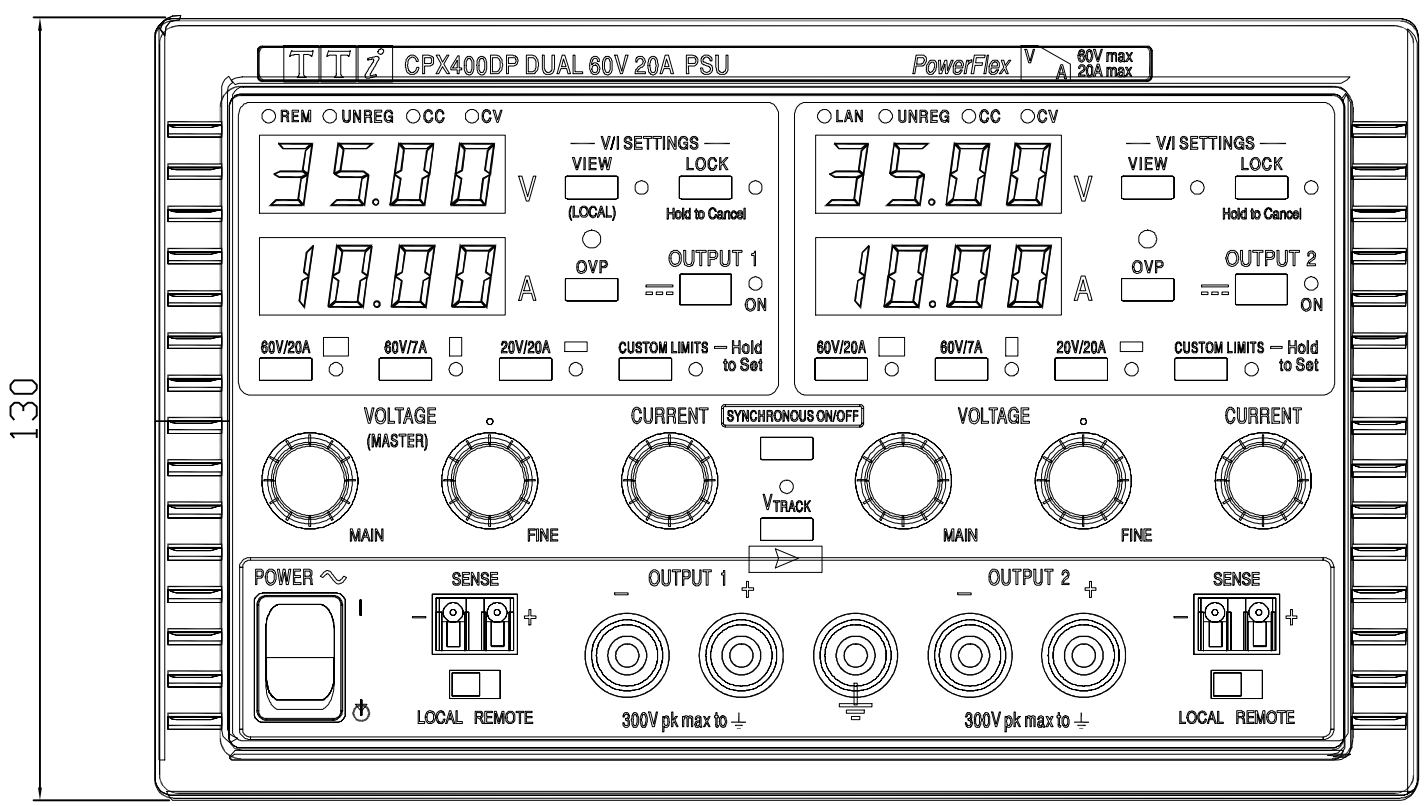
130
CPX400DP DUAL 60V 20A PSU
PowerFlex
60V max
20A max
REM UNREG CC CV
LAN UNREG CC CV
V/I SETTINGS
VIEW
LOCK
(LOCAL)
Hold to Cancel
OVP
OUTPUT 1
OUTPUT 2
ON
60V/20A
60V/7A
20V/20A
CUSTOM LIMITS — Hold to Set
VOLTAGE
(MASTER)
MAIN
FINE
CURRENT
SYNCHRONOUS ON/OFF
VTRACK
POWER
SENSE
LOCAL REMOTE
300V pk max to ⏚

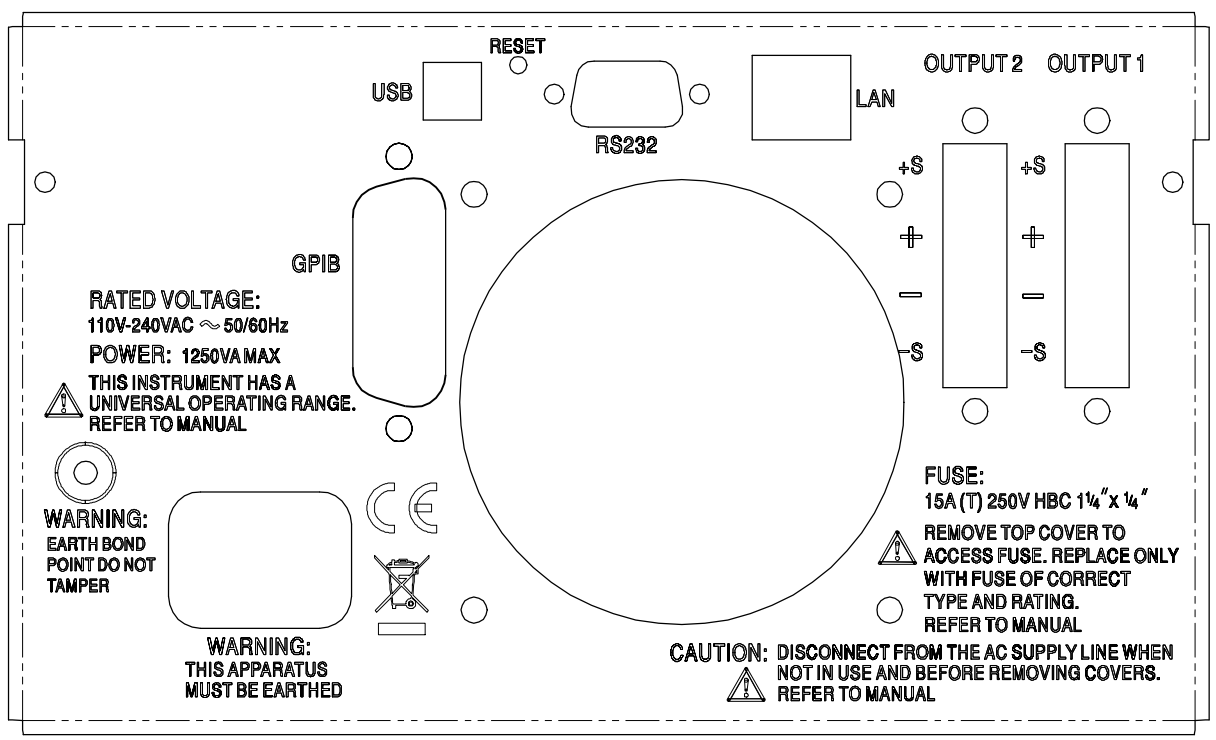
RESET
USB
RS232
LAN
OUTPUT 2
OUTPUT 1
GPIB
+S
+
−
−S
RATED VOLTAGE:
110V-240VAC ~ 50/60Hz
POWER: 1250VA MAX
THIS INSTRUMENT HAS A UNIVERSAL OPERATING RANGE. REFER TO MANUAL
FUSE:
15A (T) 250V HBC 1¼"x ¼"
REMOVE TOP COVER TO ACCESS FUSE. REPLACE ONLY WITH FUSE OF CORRECT TYPE AND RATING. REFER TO MANUAL
WARNING:
EARTH BOND POINT DO NOT TAMPER
WARNING:
THIS APPARATUS MUST BE EARTHED
CAUTION: DISCONNECT FROM THE AC SUPPLY LINE WHEN NOT IN USE AND BEFORE REMOVING COVERS. REFER TO MANUAL