


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	06/22/10	B.Puchaski

DESCRIPTION	MATERIAL	FINISH
CENTER PIN-1	BRASS	GOLD
CENTER PIN-2	BRASS	GOLD
BODY-1	BRASS	NICKEL
BODY-2	BRASS	NICKEL
RETAINING RING	BRASS	NICKEL
GASKET	RUBBER	---
INSULATOR-1	PTFE	---
INSULATOR-2	PTFE	---

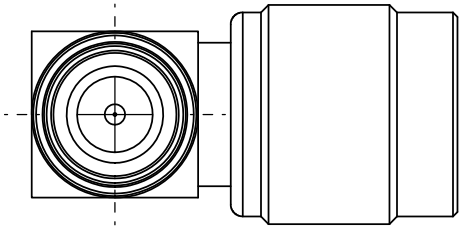

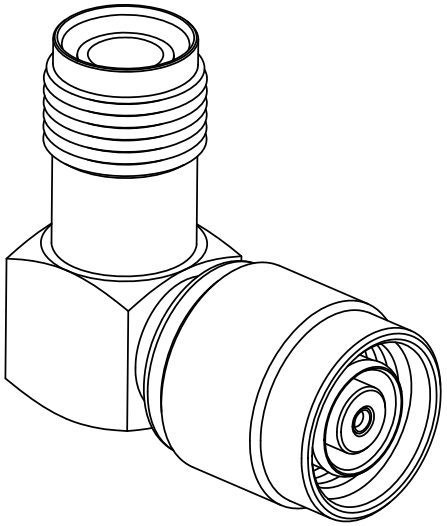

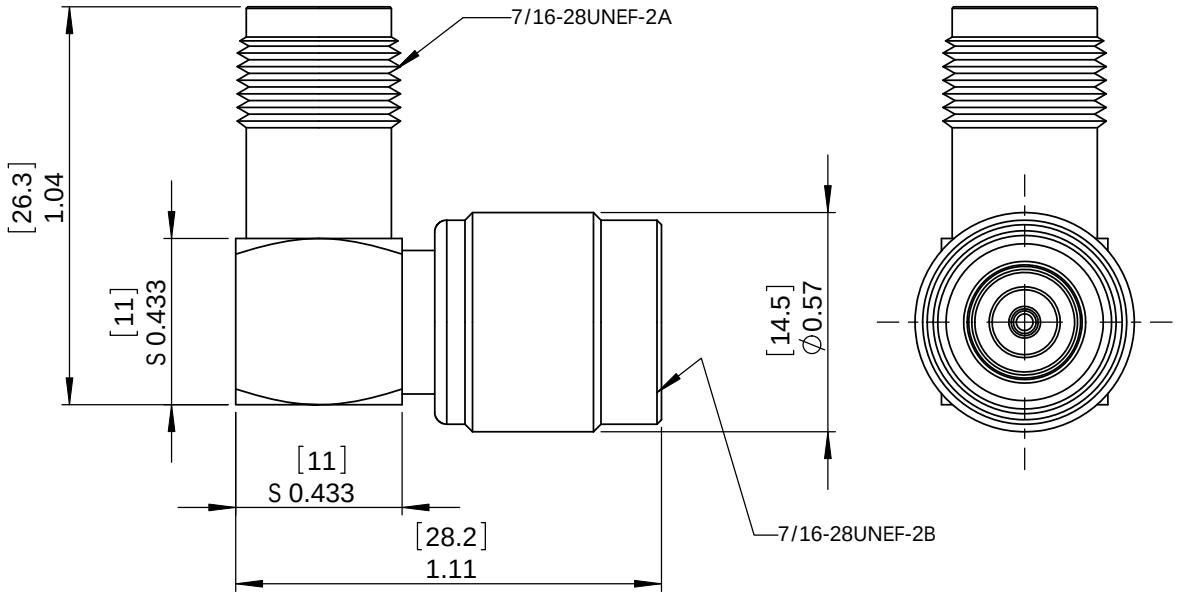

NOTES:

ELECTRICAL:
IMPEDENCE: 50 OHMS
VOLTAGE RATING: 500 VOLTS PEAK
WITHSTAND VOLTAGE: 1000V
FREQUENCY RANGE: DC~6 GHz
INSERTION LOSS: .2 dB MAX

MISCELLANEOUS:
COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
DIMENSIONAL TOLERANCES:
.X = ±.1
.XX = ±.01
.XXX = ±.005
ANGULAR TOLERANCES:
ALL = ± 1°
PROJECTION

APPROVALS	DATE
DRAWN BY B.Puchaski	06/22/10
CHECKED BY K.Burgner	06/22/10
APPROVED BY K.Burgner	06/22/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: CONNECTOR

PRODUCT DESCRIPTION: RP-TNC Plug to RP-TNC Jack Right Angle

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	AXA-RTPRTJ90	A

SCALE: NONE | CAD FILE: AXA-RTPRTJ90.SLDDRW | SHEET 1 OF 1