
REF : DUAL 22

Unbalanced audio cable - 0,22 mm²

S2CEB AUDIO VIDEO BROADCAST

Ed. 5 05/07 SL

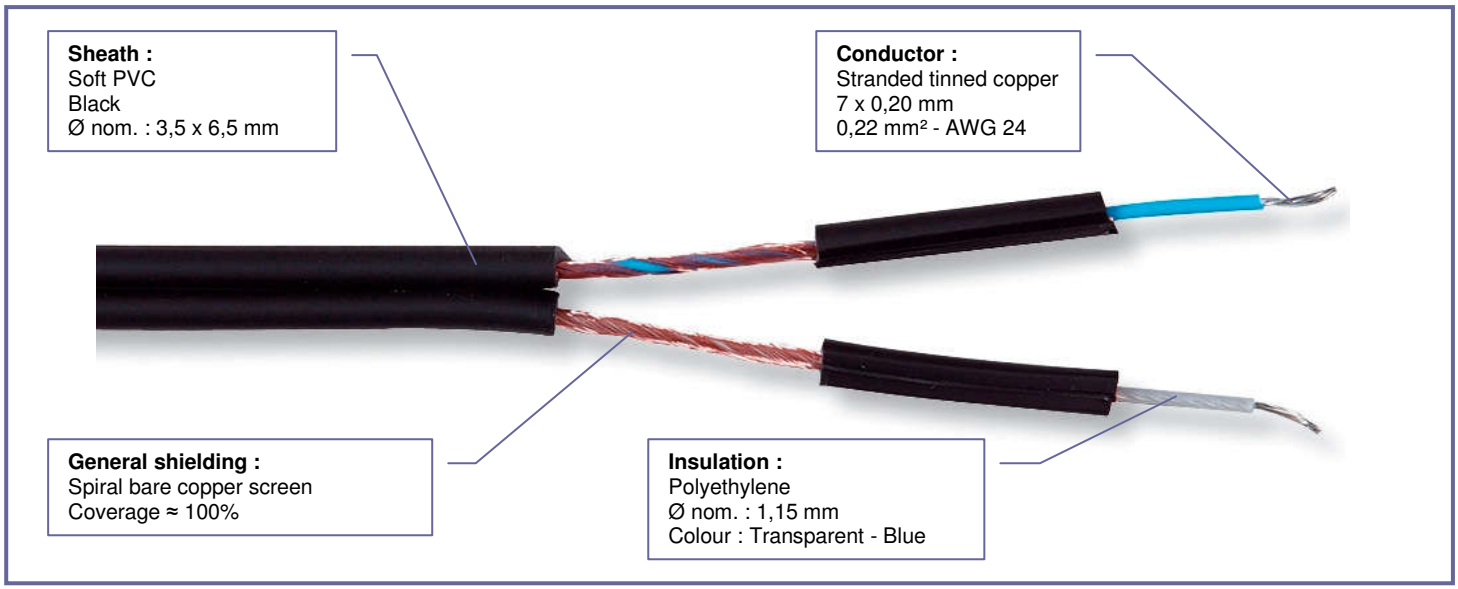

PRODUCT INFORMATIONS

Application

Cable for analogue unbalanced audio for mobile and fixed applications.
Patch panels audio
Hi fi.
For cords like cinch/cinch and jack/cinch.

Electrical properties

Max. voltage : **250 V**

Test voltage : **1000 V**

Intensity : **1,5 A**

Capacitance : **170 pF/m**

Inner conductor resistance at 20°C : **85 Ω/km**

Insulation resistance at 20°C : **> 500 MΩ.km**

Characteristics

Temperature rating : **- 20°C → + 70°C**

Minimum bending radius : **Fixed use : 25 mm** **Mobile use : 50 mm**

Weight : **40 kg/km**

Conform to RoHS directive

This document is confidential, and is the property of CAE Groupe. CAE Groupe own the copyright, and the document must not be copied or changed in any form, wholly or in part without written permission from CAE Groupe. The contents of this document must be disclosed to any other person or persons.
The characteristics related to this document are not contractual, and can be modified without warning.