Specifications

Eaton 215645

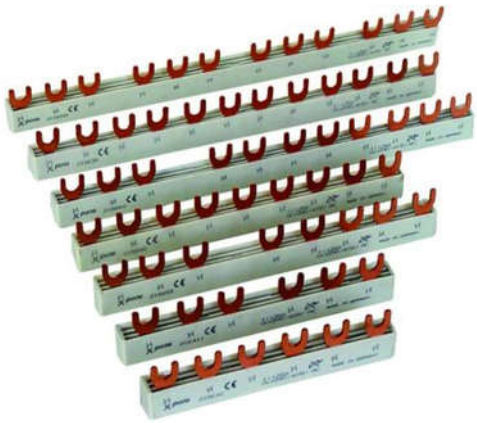

Catalog Number: 215645

Eaton Moeller series xPole - Busbar. EV busbars 3Ph., 9HP, 63A for PLS. CLS. PKN., PFIM, PFHM, PFNM

General specifications

Product Name
Eaton Moeller series busbar

Catalog Number
215645

EAN
9010238140318

Product Length/Depth
140 mm

Product Height
30 mm

Product Width
10 mm

Product Weight
0.063 kg

Compliances
RoHS conform

Certifications
CE

Powering Business Worldwide

Product specifications

Used with

PLS. CLS. PKN., PFIM, PFHM, PFNM

Busbar

EVG

Type

Busbar

EVG

Features

Insulated

Accessory/spare part type

Busbar for residual current circuit breakers

Busbar for combined residual current/power circuit breaker

Busbar for miniature circuit breaker

Electric connection type

Fork

Rated surge voltage

4 KV

Rated uninterrupted current (Iu)

63 A

Suitable for number of devices

3

Number of poles

Three-pole

Color

Other

Rated short-time withstand current (Icw)

0 kA

Cross section

10 mm²

Number of modular spacings

9

Number of phases

3

Pitch dimensions

0 mm

Resources

Declarations of conformity

DA-DC-03_EVG

Drawings

eaton-busbar-3d-drawing.jpg

Specifications and datasheets

Eaton Specification Sheet - 215645

Rated operational voltage (Ue) - max

500 V

Rated conditional short-circuit current (Iq)

25 kA

Functions

Busbar

Suitable for

3 devices

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia