

IP65

Switch-Disconnector DMM125 and DMM160 in CI-K5-enclosure







We have added Dumeco DMM125 and DMM160 switch-disconnectors with a CI-K5 enclosure to our range of main switch, maintenance switch, and repair switch products. This means that this range of products now features units with current ratings of 125 A and 160 A as well. The fibre glass reinforced polycarbonate housing is a robust solution offering tremendous chemical resistance performance. The high-quality seal on the housing is rated to protection class IP65, ensuring full protection for the switchgear. Total insulation offers optimal protection for the operator.

The DMM125 and DMM160 are universally compatible with the blue or grey toggles. All units will also be available in two versions: a version that can be locked with a padlock (max. three padlocks) and a version with a cylinder lock.

The switch-disconnectors are available in 3-pole, 3-pole + solid neutral, and 4-pole configurations.

Powering Business Worldwide

Product range DMM125 and DMM160 at a glance

Designation	Part no.	Article no.	Part no.	Article no.
	125 Ampere		160 Ampere	
Main switch 3P, surface mounting, cylinder lock				
Toggle blue	**DMM-125/3/I5/C-B**	172858	**DMM-160/3/I5/C-B**	172801
Toggle grey	**DMM-125/3/I5/C-G**	172859	**DMM-160/3/I5/C-G**	172802
Toggle red/yellow	**DMM-125/3/I5/C-R**	172860	**DMM-160/3/I5/C-R**	172803
Main switch 3P, surface mounting, padlock				
Toggle blue	**DMM-125/3/I5/P-B**	172849	**DMM-160/3/I5/P-B**	172792
Toggle grey	**DMM-125/3/I5/P-G**	172850	**DMM-160/3/I5/P-G**	172793
Toggle red/yellow	**DMM-125/3/I5/P-R**	172851	**DMM-160/3/I5/P-R**	172794
Main switch 3P+N, surface mounting, cylinder lock				
Toggle blue	**DMM-125/3N/I5/C-B**	172855	**DMM-160/3N/I5/C-B**	172798
Toggle grey	**DMM-125/3N/I5/C-G**	172856	**DMM-160/3N/I5/C-G**	172799
Toggle red/yellow	**DMM-125/3N/I5/C-R**	172857	**DMM-160/3N/I5/C-R**	172800
Main switch 3P+N, surface mounting, padlock				
Toggle blue	**DMM-125/3N/I5/P-B**	172846	**DMM-160/3N/I5/P-B**	172789
Toggle grey	**DMM-125/3N/I5/P-G**	172847	**DMM-160/3N/I5/P-G**	172790
Toggle red/yellow	**DMM-125/3N/I5/P-R**	172848	**DMM-160/3N/I5/P-R**	172791
Main switch 4P, surface mounting, cylinder lock				
Toggle blue	**DMM-125/4/I5/C-B**	172861	**DMM-160/4/I5/C-B**	172804
Toggle grey	**DMM-125/4/I5/C-G**	172862	**DMM-160/4/I5/C-G**	172805
Toggle red/yellow	**DMM-125/4/I5/C-R**	172863	**DMM-160/4/I5/C-R**	172806
Main switch 4P, surface mounting, padlock				
Toggle blue	**DMM-125/4/I5/P-B**	172852	**DMM-160/4/I5/P-B**	172795
Toggle grey	**DMM-125/4/I5/P-G**	172853	**DMM-160/4/I5/P-G**	172796
Toggle red/yellow	**DMM-125/4/I5/P-R**	172854	**DMM-160/4/I5/P-R**	172797

Dimensions

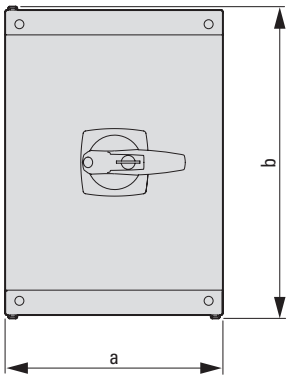

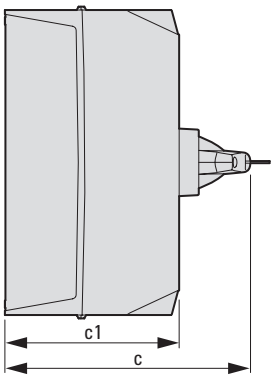

[mm]			
a	200	c	226
B	280	c1	160

[in]			
a	7.87	c	8.9
B	11.02	c1	6.3



The DMM switch disconnectors round out our program of P1 to P5 switch disconnectors from 32 to 315 A for main switch, on/off switch and maintenance/repair/safety switch applications.

Powering Business Worldwide

Eaton Industries GmbH
Hein-Moeller-Str. 7–11
D-53115 Bonn/Germany

© 2014 by Eaton Corporation
All rights reserved
Printed in Germany 01/14
Publication No.: FL038002EN
ip Januar 2014
Article No.: 174413

4 015081 708758

Moeller series is a registered trademark of Eaton Corporation
All other trademarks are property of their respective owners.
SmartWire-DT® is a registered trademark of Eaton Corporation.