SCHAEFFLER

Angular contact ball bearings

7206-B-XL-2RS-TVP (Series 72..-B-2RS)

main dimensions to DIN 628-1, contact angle α = 40°, lip seals on both sides

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue selection system (https://www.schaeffler.de/content.schaeffler.de/en/news_media/index.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	30 mm
D	62 mm
B	16 mm
a	27 mm
D_1	49,5 mm
D_2	51,7 mm
d_2	39,5 mm
D_3	57,1 mm
$D_{a\ max}$	56,4 mm
$d_{a\ min}$	35,6 mm
$D_{b\ max}$	57,8 mm

$r_{1\ min}$	0,6 mm	
$r_{a1\ max}$	0,6 mm	
$r_{a\ max}$	1 mm	
r_{min}	1 mm	
α	40 °	Contact angle

m	0,204 kg	Mass
C_r	21700 N	Basic dynamic load rating, radial
C_{0r}	14100 N	Basic static load rating, radial
C_{ur}	980 N	Fatigue limit load, radial
n_G	6500 1/min	Limiting speed

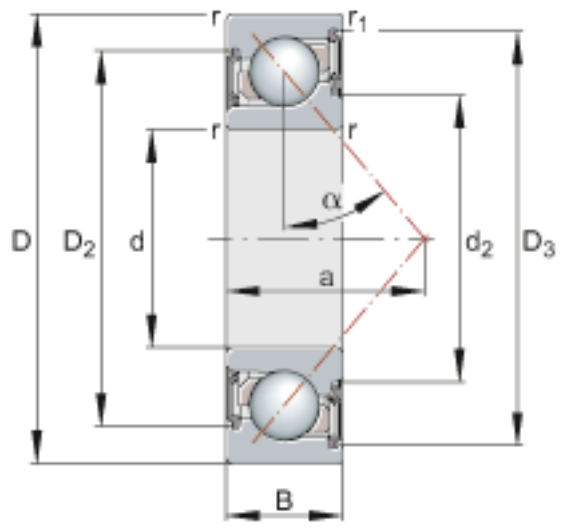

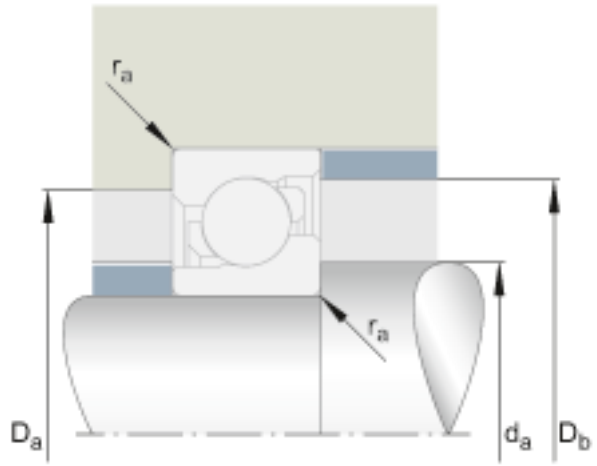
r_a
r_a
D_a
d_a
D_b

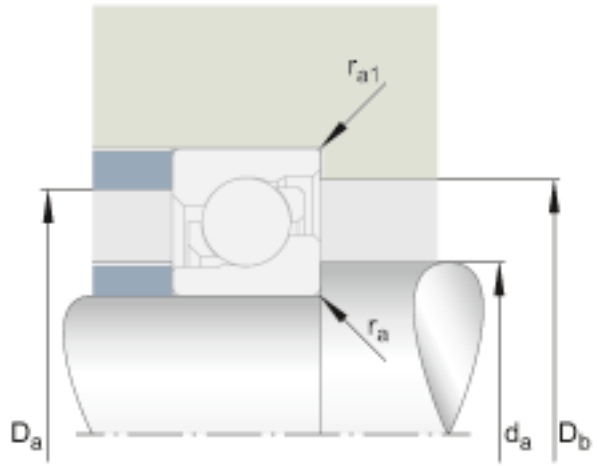
r_{a1}
r_a
D_a
d_a
D_b