150 LED/Buzzer Combination





- **LED Permanent light**
- **Continuous tone can be additionally activated**
- **Simple connection by means of connector plug**

Life duration up to 50,000 hrs

TECHNICAL SPECIFICATIONS:

Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel)
Housing:	PC/ABS-Blend
Lens:	PC, transparent
Connection:	Connector plug with screw terminal max. 1.5 mm²
Tone type:	Continuous
Tone frequency:	C. 2.8 kHz
Duty cycle:	100 %
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm) with anti-twist device

Nut and seal included in assembly.

ORDER SPECIFICATIONS:

Play Sound www.werma.com

Voltage	24 V DC	115 V AC	230 V AC
Current consumption	< 50 mA	< 20 mA	< 20 mA
red	**150 100 55**	**150 100 67**	**150 100 68**
yellow	**150 300 55**	**150 300 67**	**150 300 68**


TECHNICAL DIAGRAMS:

see page 297


See note on page 347

c UL us CE EAC 30 g IP65 +50°C -20°C 80 dB 24 V PLC


WERMA SIGNALTECHNIK

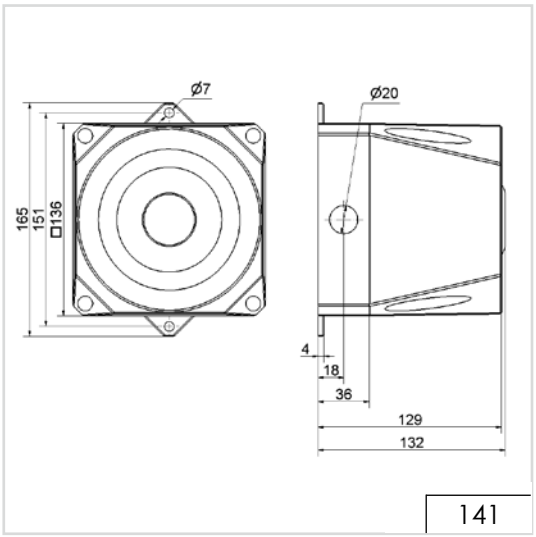


141

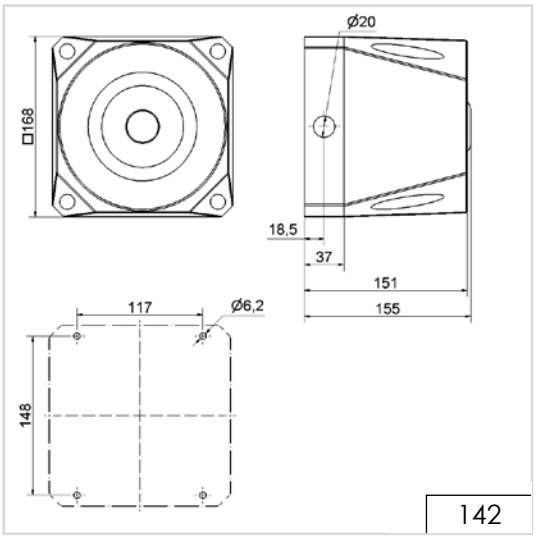


142

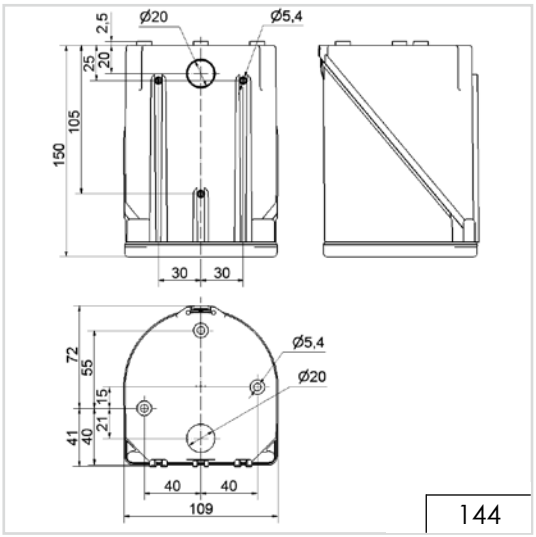


144

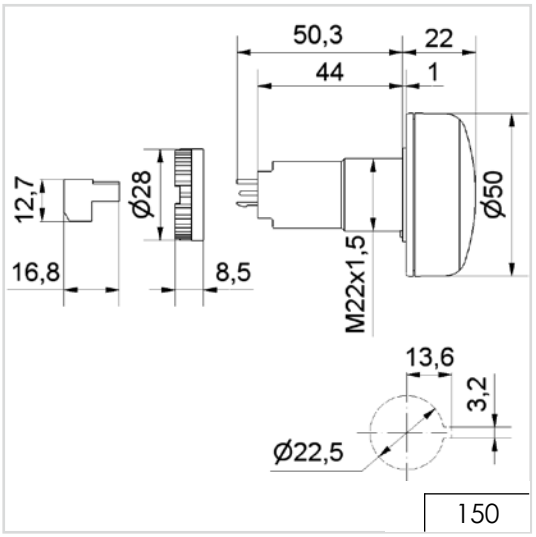

150

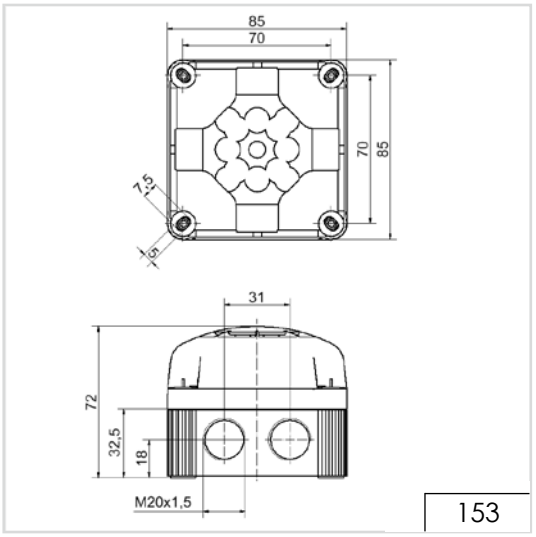

153

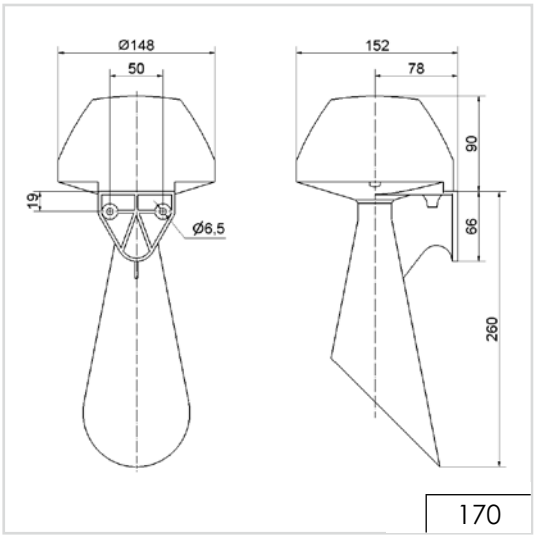

170

ADDITIONAL INFORMATION:

You are welcome to request the technical diagrams in digital form. The relevant 3D models, instruction leaflets and connection diagrams can be obtained from us or downloaded from our homepage at any time.