Datenblatt - Fiche technique - Data sheet


21.15.2554



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, schwarz, 1,5 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, noir, 1,5 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, black, 1.5 m

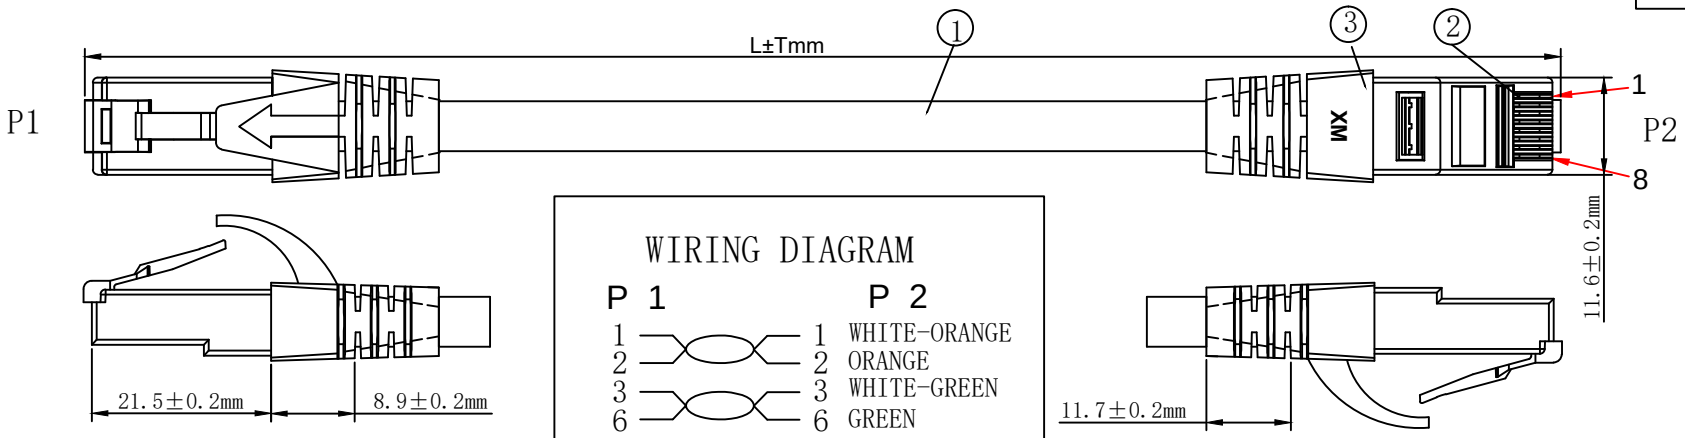

WIRING DIAGRAM

P 1		P 2
1	1	WHITE-ORANGE
2	2	ORANGE
3	3	WHITE-GREEN
6	6	GREEN
4	4	BLUE
5	5	WHITE-BLUE
7	7	WHITE-BROWN
8	8	BROWN

1. ELECTRICAL TEST:
   (1). 100% OPEN SHORT & MISS WIRE TEST;
   (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
   (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:50mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC black	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u″,Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

COLOUR:black (PANTONE:black 3C)

ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2945	300mm	±10mm
21.15.2550	500mm	±15mm
21.15.2551	1000mm	±30mm
21.15.2554	1500mm	±45mm
21.15.2552	2000mm	±60mm
21.15.2553	3000mm	±90mm
21.15.2555	5000mm	±150mm
21.15.2556	7500mm	±210mm
21.15.2557	10000mm	±300mm
21.15.2558	15000mm	±450mm
21.15.2559	20000mm	±600mm

ITEM NO.	21.15.2945	21.15.2550	21.15.2551	21.15.2552	21.15.2553
21.15.2554	21.15.2555	21.15.2556	21.15.2557	21.15.2558	21.15.2559
DESC.	ROLINE UTP PatchCord CAT.6,LSOH,Comp.Level,black				

SECOMP