AN - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - MILLED BLADES | AN2,5X50



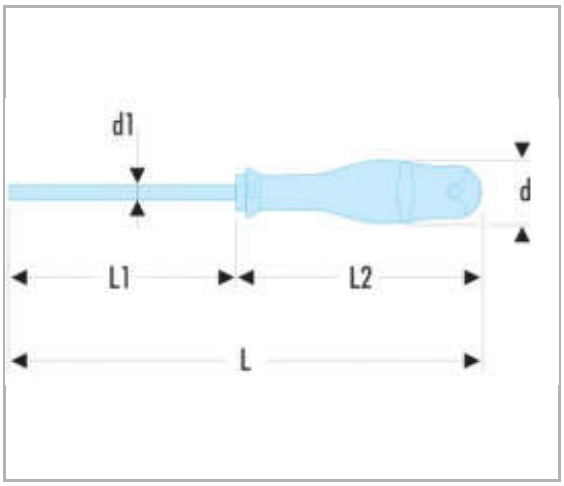

Norm :

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600

Description

• Round shank for access in wells.
• Extra-long shank up to 300 mm for difficult and remote access.
• Silicon carbon blade: strong and resistant to flexion.
• Bi-material grip resists to impacts, abrasion, and chemicals.
• Finish: black tipped mat chromed blade.

Information

A [mm]	2,5
d [mm]	19
E [mm]	0,4
L [mm]	144
L2 [mm]	94
Contents	Roll: N.38A-6B
[g]	20

FACOM 2014 ©